



Agenda Item #3

Application 2026-5-CA

DETAILS

Location:
1008 Elmira Street

Summary of Request:
Construct a one-story wood frame single family home

Applicant:
GeeGee Watt

Property Owner:
BPCH Builders

Historic District:
Oakleigh Garden

Classification:
Contributing (previous COA for demo of structure)

Summary of Analysis:

- The scale and placement of the proposed single-family home are compliant with the *Design Guidelines* for new residential structures.
- The proposed materials are approved under the *Design Guidelines*.

Report Contents:

Property and Application History	2
Scope of Work	2
Applicable Standards	3
Staff Analysis	3
Attachments	8

PROPERTY AND APPLICATION HISTORY

Oakleigh Garden Historic District was initially listed in the National Register in 1972 under Criteria A (historic significance) and C (architectural significance) for its local significance in the areas of architecture, landscape architecture, and planning and development. The district is significant for its high concentration of 19th- and 20th-century architectural types and styles and significant in the area of landscape architecture for its canopies of live oaks planted from 1850 to 1910. The district is significant in the area of planning and development as the location of Washington Square, one of only two antebellum public parks remaining in Mobile. The district was expanded in 1984, and an updated nomination was approved in 2016.

The property at 1008 Elmira is a c. 1895 one-story wood frame shotgun with Victorian detailing. It consists of a two-bay façade with full-width front porch incorporated under a gable roof and supported by turned posts with decorative brackets. A cross-gable projection extends from the west elevation. The house has been minimally altered from its original form. It is currently in a deteriorated state.

This property has appeared once before the Architectural Review Board. In 2025, a COA was issued to demolish the 1895 one-story frame shotgun with Victorian dwelling. Demolition of the existing dwelling has not occurred as of the writing of this staff report.

SCOPE OF WORK

Construct one-story wood-frame slab-on-grade shotgun house structure.

1. The proposed structure would be located on Elmira Street with its south facade facing the road. It will measure 29'2" W x 59'2" D.
2. Front setback from Elmira will be in alignment with neighboring structures and will be set 5' from west property line with driveway to the east of the home.
3. The house features a front gable roof with shed roof projections over the rear porch. Roofs will be clad using architectural shingles. The roof ridge height from finished floor will be 17'1". Both gable ends will feature small gable vents each measuring 15" W x 25"
4. The main block of the structure will sit on a 2'-0" simulated raised concrete slab foundation which will be clad in a brick veneer.
5. The front porch and rear covered deck will sit on 2'-0" piers covered in brick veneer. Fiber cement or wood lattice infill panels will be installed between piers.
6. The home will be clad in cement fiber lap siding except on façade gable end which will be clad in cement fiber board and batten siding
7. Exterior AC unit will be located in alignment with rear porch to the east of residence.

South facade

1. A partial width front porch will span the west side of facade and will measure 14'9" W x 6'5" D. Porch will have two chamfered columns. Columns feature beveled box bases and flared capitals. 4 steps will access the front porch across from entry door. The steps will be flanked by picket railing.
2. South façade will read as follows (from west to east):
 - a. 3-bay western side- two single-hung 1 over 1 vinyl-clad windows that measure 31" W x 73" H; aluminum-clad full lite door that measures 38" W x 83" H.
 - b. 2-bay east projection- two vinyl clad single-hung 1 over 1 windows that will measure 31" W x 73" H, each flanked by board and batten shutters.

East elevation

1. A single fixed window that will measure 37" W x 17" H, located on northern 3rd of elevation.

North elevation

1. A wood frame covered porch will span center and western bays
 - a. Will measure 16'1" W x 9'11" D.

2. North elevation will read as follows (from east to west): 1 over 1 mulled vinyl-clad double window unit that measures 73" W x 61" H; full lite aluminum door that measures 33" W x 83" H; 1 over 1 mulled vinyl-clad double unit window that measures 73" W x 61" H.

West elevation

1. One full lite aluminum door that measures 38" W x 83" H will access the master bedroom on the north end of the elevation; one single hung 1 over 1 vinyl-clad window that measures 37" W x 61" H will be roughly centered on the elevation.
2. 4 wooden steps will descend from rear porch.

APPLICABLE STANDARDS (*Design Review Guidelines for Mobile's Historic Districts*)

- 6.34 Maintain the visual line created by the fronts of buildings along a street.
 - Where front yard setbacks are uniform, place a new structure in general alignment with its neighbors.
 - Where front yard setbacks vary, place a new structure within the established range of front yard setbacks on a block.
- 6.35 Maintain the side yard spacing pattern on the block.
 - Locate a structure to preserve the side yard spacing pattern on the block as seen from the street.
 - Provide sufficient side setbacks for property maintenance.
 - Provide sufficient side setbacks to allow needed parking to occur behind the front wall of the house.
- 6.36 Design the massing of new construction to appear similar to that of historic buildings in the district.
 - Choose the massing and shape of the new structure to maintain a rhythm of massing along the street.
 - Match the proportions of the front elevations of a new structure with those in the surrounding district.
- 6.37 Design the scale of new construction to appear similar to that of historic buildings in the district.
 - Use a building height in front that is compatible with adjacent contributing properties.
 - Size foundation and floor heights to appear similar to those of nearby historic buildings
 - Match the scale of a porch to the main building and reflect the scale of porches of nearby historic buildings
- 6.38 Design exterior building walls to reflect traditional development patterns of nearby historic buildings.
 - Use a ratio of solid to void that is similar in proportion to those of nearby historic buildings.
 - Reflect the rhythm of windows and doors in a similar fashion on all exterior building walls. The ARB will consider all building walls; however, building walls facing streets may face increased scrutiny.
 - Use steps and balustrades in a similar fashion as nearby historic structures.
 - Design building elements on exterior building walls to be compatible with those on nearby historic buildings. These elements include, but are not limited to:
 - Balconies
 - Chimneys
 - Dormers
- 6.39 Use exterior materials and finishes that complement the character of the surrounding district.
 - Use material, ornamentation or a color scheme that blends with the historic district rather than making the building stand out.
 - If an alternative material is used that represents an evolution of a traditional material, suggest the finish of the original historic material from which it evolved.
 - Use a material with proven durability in the Mobile climate and that is similar in scale, character and finish to those used on nearby historic buildings.

ACCEPTABLE MATERIALS

- Materials that are compatible in character, scale and finish to those used on nearby historic buildings are acceptable. These often include:

- Stucco
- Brick
- Stone
- Wood (lap siding, shingles, board and batten)
- Concrete siding
- Cement fiber board siding
- Skim stucco coat

UNACCEPTABLE MATERIALS

- Materials that are incompatible in character, scale and finish to those used on nearby historic buildings are unacceptable. These often include:

- Metal siding
- Vinyl siding
- Unfinished concrete block
- Plywood
- Masonite
- Vinyl coatings
- Ceramic coatings
- Exterior insulation and finishing system (EIFS) wall systems

- 6.40 Design a roof on new construction to be compatible with those on adjacent historic buildings.

- Design the roof shape, height, pitch and overall complexity to be similar to those on nearby historic buildings.
- Use materials that appear similar in character, scale, texture and color range to those on nearby historic buildings.
- New materials that have proven durability may be used.

ACCEPTABLE ROOF MATERIALS

- Materials that are similar in character, scale, texture and color range to those used on nearby historic buildings are acceptable. These often include:

- Asphalt dimensional or multi-tab shingles
- Wood shake or shingle
- Standing seam metal
- Metal shingles
- 5-V crimp metal
- Clay tile
- Imitation clay tile or slate

- 6.41 Design a new door and doorway on new construction to be compatible with the historic district.

- Place and size a door to establish a solid-to-void ratio similar to that of nearby historic buildings.
- Place a door in a fashion that contributes to the traditional rhythm of the district as seen in nearby historic buildings.
- Incorporate a door casement and trim similar to those seen on nearby historic buildings.
- Place and size a special feature, including a transom, sidelight or decorative framing element, to complement those seen in nearby historic buildings.
- Use a door material that blends well with surrounding historic buildings. Wood is preferred. Paneled doors with or without glass are generally appropriate.

- 6.42 Design a porch to be compatible with the neighborhood.

- Include a front porch as part of new construction if it is contextual and feasible.
- When designing a porch, consider porch location, proportion, rhythm, roof form, supports, steps, balustrades and ornamentation relative to the main building and porches in the district.
- Design the elements of a porch to be at a scale proportional to the main building.
- Where a rhythm of porches exists on a street or block, design a porch that continues this historic rhythm.
- Design a rear or side porch that is visible from the public right-of-way to be subordinate in character to the front porch.

- 6.43 Design piers, a foundation and foundation infill to be compatible with those of nearby historic properties.
 - Use raised, pier foundations.
 - If raised foundations are not feasible, use a simulated raised foundation.
 - Do not use slab-on-grade construction. This is not appropriate for Mobile's historic neighborhoods. If a raised slab is required, use water tables, exaggerated bases, faux piers or other methods to simulate a raised foundation.
 - Do not use raw concrete block or exposed slabs.
 - If foundation infill must be used, ensure that it is compatible with the neighborhood.
 - If solid infill is used, recess it and screen it with landscaping.
 - If lattice is used, hang it below the floor framing and between the piers. Finish it with trim.
 - Do not secure lattice to the face of the building or foundation.
 - Do not use landscaping to disguise inappropriate foundation design.

ACCEPTABLE FOUNDATION MATERIALS

- Materials that are similar in character, texture and durability to those used on nearby historic buildings are acceptable. These often include:
 - Brick piers
 - Brick infill
 - Wood (vertical pickets)
 - Framed lattice infill

UNACCEPTABLE FOUNDATION MATERIALS

- Materials that are not similar in character, texture and durability to those used on nearby historic buildings are unacceptable. These often include:
 - Mineral board panels
 - Concrete block infill
 - Metal infill
 - Plywood panel infill
 - Plastic sheeting infill
 - Vinyl sheeting infill

- 6.45 Locate and design windows to be compatible with those in the district.
 - Locate and size a window to create a solid-to-void ratio similar to the ratios seen on nearby historic buildings.
 - Locate a window to create a traditional rhythm and a proportion of openings similar to that seen in nearby historic buildings.
 - Use a traditional window casement and trim similar to those seen in nearby historic buildings.
 - Place a window to match the height of the front doorway.
 - Place a window so that there is proportionate space between the window and the floor level.
 - Do not place a window to directly abut the fascia of a building.
 - Use a window material that is compatible with other building materials.
 - Do not use a reflective or tinted glass window.
 - Use a 1/1 window instead of window with false muntins. A double paned window may be acceptable if the interior dividers and dimensional muntins are used on multi-light windows. A double paned 1/1 window is acceptable.
 - Do not use false, interior muntins except as stated above.
 - Recess window openings on masonry buildings.
 - Use a window opening with a raised surround on a wood frame building.

ACCEPTABLE WINDOW MATERIALS

- Materials that are similar in character, profile, finish and durability to those used on nearby historic buildings are acceptable. These often include:
 - Wood
 - Vinyl-clad wood
 - Aluminum-clad customized wood

- Extruded Aluminum

UNACCEPTABLE WINDOW MATERIALS

- Materials that are not similar in character, profile, finish and durability to those used on nearby historic buildings are unacceptable. These often include:
 - Mill finish metal windows
 - Snap-in or artificial muntins
 - Vinyl

- 6.46 Design shutters and awnings to be compatible with the building.
 - Use a shutter that fits the reveal of a window opening precisely.
- 6.47 Design shutters and awnings to be compatible with the district.
 - Use operable blinds or shutter units hung with hinges.
 - When using artificial materials, use a blind or shutter unit that has a thickness, weight and design similar to wood. An artificial material shutter will be considered on a case-by-case basis.
 - Use an operable shutter where feasible.
 - Where a blind or shutter is fixed, hang them on a window casing in a manner to replicate an operable shutter.
 - If a synthetic awning is used, use one with a textured surface. Do not use an awning with a smooth vinyl surface.

ACCEPTABLE SHUTTER AND AWNING MATERIALS

- Materials that are similar in character, texture and durability to those used on nearby historic buildings are acceptable. These often include:
 - Louvered or solid panel wood (shutter)
 - Louvered or solid panel composite
 - Fabric (awning)

UNACCEPTABLE SHUTTER AND AWNING MATERIALS

- Materials that are not similar in character, texture and durability to those used on nearby historic buildings are unacceptable. These often include:
 - Lightweight plastic (shutter)
 - Metal (awning)

STAFF ANALYSIS

The lot at 1008 Elmira Street is located within the Oakleigh Garden District. The application under review seeks approval to construct a new single-family residence. The existing contributing one-story Victorian c. 1895 home has been previously approved by the ARB for demolition.

The setback provided by the applicant to have the façade elevation be in alignment with the surrounding homes would be following the *Guidelines* (6.34). The given 5' side setback on western portion of the parcel would respect 6.35 of the *Guidelines*, however the dimensions of the proposed driveway on the east portion of the parcel were not provided. The *Guidelines* state that the massing and scale of new construction should appear similar to that of the historic buildings in the district (6.36, 6.37). The proposed new construction is consistent in both massing and scale to the surrounding homes that are predominantly one-story front gable cottages with front and rear porches. The *Guidelines* also call for the design of exterior building walls to reflect traditional development patterns of nearby historic buildings and reflect the established rhythm of windows and doors along all exterior building walls (6.38). The south and north elevations of the subject structure reflect similar door and window spacing as the surrounding historic buildings, however the east and west elevations having only one window are not consistent with surrounding historic elevations, creating a solid-to-void ratio that is dissimilar to the ratios seen on nearby historic buildings (6.45).

The *Guidelines* call for the design of a porch to be compatible with the neighborhood (6.42). The front porch proposed for the new structure is a feature that aligns with the surrounding designs. However, the off-center placement on the façade is a slight departure from the mostly full-width front porches seen along the street.

The chamfered box columns would vary from the turned posts of the existing historic structure on the subject parcel and the homes directly to the north and south. However, there are dwellings along the south side of Elmira and along the blocks to the east that present squared posts and boxed columns along the façade. The brick veneer applied to the base of the columns below the porch and the lattice foundation infill contributes to the appearance of a raised pier foundation, which is called for in the *Guidelines* if a true raised pier foundation is not used (6.43).

The *Guidelines* state that the design of roofs for new construction should be compatible with those on the nearby historic buildings (6.40). The design of the roof on the subject project features a front gabled roof that displays a gable vent on both the south/façade elevation and north/rear elevation. Front gable roofs are the most frequent roof design seen on historic buildings around the subject project.

The exterior materials and finishes proposed for the subject property are approved under the *Guidelines* (6.39). This includes fiber cement lap siding, board and batten siding, aluminum-clad doors, and brick veneer applique on the cement slab. The proposed material for the windows is vinyl-clad wood, which is also an approved material for use in local historic districts by the *Guidelines* (6.45). The proposed new structure features three full-lite aluminum-clad exterior doors. This more modern style door and its surround do not appropriately complement those of the nearby historic buildings as called for in the *Guidelines* (6.41). Additionally, the *Guidelines* state to, “use a shutter that fits the reveal of a window opening precisely” (6.46). The proposed shutters on the south elevation seem to be proportional to the windows they are corresponding to. However, the single shutter proposed for the west side of the south elevation would not read as being operable/functional as called for in the *Guidelines* (6.47). It is not sufficiently clear from the plans how the shutters will be affixed to the façade. From the plans it appears that they are not affixed to the window casing to emulate an operable shutter, as called for in the *Guidelines* (6.47).

Site Location – 1008 Elmira Street

ARCHITECTURAL REVIEW BOARD
VICINITY MAP

SITE

APPLICATION NUMBER 2 DATE 9/17/2025
APPLICANT GeeGee Watt on behalf of Jesse Burks
PROJECT Demolish historic dwelling

N
NTS

Site Photos – 1008 Elmira Street



1. View of property, looking NE



2. View of property, looking NW



3. View of east elevation, looking NW



4. View of rear (north) corner of east elevation, looking W



5. View of rear (north) elevation, looking SW



6. View of west elevation, looking NE



7. View of adjacent dwellings along north side of Elmira Street, looking NW



8. View of streetscape across the street from subject property (south side of Elmira Street), looking SW



9. View of lot across the street from subject property, looking S



View of streetscape across the street from subject property (south side of Elmira Street), lo



City of Mobile · Historic Development

Architectural Review Board Application

12/22/2025

Date of Application

Date Received

1008 Elmira Street, Mobile, AL 36604

Address of Property

Does any party hold a façade easement on this property? No Yes

If yes, evidence of the easement holder's approval of the specific work outlined in this application must be provided prior to the consideration of this application by the ARB.

165,000

Fee Paid: \$ _____ Check # _____

Cost of Project (Required)

BPCH Builders

251-401-9519

finance@irbygroup.com

Owner Name

Phone

Email

503 Government Street, Mobile, AL

36602

Address

Zip Code

If Owner is a legal entity such as a corporation, limited liability company, limited liability, partnership or similar, you should attach a copy of the formation documents for the Owner, showing the date of formation and that such have been filed and accepted by the Secretary of State.

GeeGee Watt

251-753-0407

gwatt@irbygroup.com

Owner's Representative Name

Phone

Email

503 Government Street, Mobile, AL

36602

Address

Zip Code

Describe the Proposed Work:

New Construction - 1 Story, Single Family Residential

Build Mobile, PO Box 1827, Mobile, Alabama 36633

For more information: www.BuildMobile.org | historicdevelopment@cityofmobile.org | 251.208.7281

Visit our help window: Mobile Government Plaza, 205 Government Street, Third Floor South Tower

Revised August 2023

Does the work involve demolition of a structure? **No** **Yes** Please fill out demolition portion of application.

Does the proposed work involve signage? **No** **Yes**

Will the proposed work require the removal of any trees from the site? **No** **Yes**

If yes, attach a detailed site plan showing all trees and landscaping that will be removed and contact the Urban Forester at 208-7091 for Tree Permitting Requirements.

REQUIRED PLANS: If plans are required for the project, please attach the following:

- Attach two (2) sets of plans: one large scale set and one 11"x17" reproducible set,
- Also attach one set of photographs to the application.
- If available, electronic plans should also be submitted as a TIFF or PDF.
- A \$15 or \$5.00 application fee is due upon filing. Check should be made out to the City of Mobile.

Refer to the following checklist for requirements for specific work items to be performed. Refer to the Design Review Guidelines for Mobile's Historic Districts (<https://www.buildmobile.org/architectural-review-board/>). Staff is available to assist with application preparation. For large projects, such as new construction or substantial additions or renovations, consultation with staff is strongly encouraged. Applications are reviewed in the order in which they are received, and if review by the Architectural Review Board is required, an application will be placed on the next available agenda. Any incomplete applications may be held until all information is submitted.

Staff Reports: The Historic Development Staff will review your application and generate a report that will be sent to you, along with the meeting agenda, via e-mail approximately one week before the meeting. The meeting agenda may be found at <https://www.buildmobile.org/architectural-review-board/>. Please examine these and be prepared to discuss any issues at the Board meetings. Questions before the meeting should be addressed to the staff of the Historic Development Department.

Alterations to Approved Plans: A new application must be submitted for changes to the approved plan. Minor alterations may be approvable by staff.

Historic Markers: The Architectural Review Board examines applications based on its adopted guidelines for historic preservation. These are based on a minimal standard set by the City of Mobile and the State. Historic markers are awarded by the Mobile Historic Development Commission based on a higher standard of review. Approval by the ARB does not guarantee approval for a historic marker. If the desire is to qualify for a marker, please inform the Board and it will attempt to guide you toward the higher goal.

Conflicts of Interest: ARB members sit as a quasi-judicial body. All its deliberations must be made in an open meeting. It is illegal for a Board member to discuss an application outside of a meeting with anyone but staff. Conflicts of interest, if any, will be disclosed at the meeting.

Public Notice: A sign will be placed in a conspicuous location on the property prior to the Review Board meeting to notify surrounding property owners of a pending application. Attendance at the meeting is strongly advised in order for the applicant to respond to any questions.

NOTE: INCOMPLETE APPLICATIONS WILL NOT BE PLACED ON THE AGENDA

Use the Following Checklist to Ensure a Complete Application
Complete each box that applies:

NEW CONSTRUCTION, ADDITIONS, OR EXTENSIVE RENOVATION/REPAIR TO EXISTING STRUCTURES

- 1. One large set and one 11 x 17 (reproducible) set of scaled drawings which shall include:**
 - a. A complete site plan illustrating the proposed construction, its location, with dimensions, required setbacks, landscaping and other site amenities;
 - b. Floor plans, with dimensions, as they impact the exterior of the building, including existing plan and proposed plan;
 - c. Square footage of the original building with square footage of all additions including the proposed addition;
 - d. A drawing, with dimensions, of all affected exterior elevations;
 - e. Notes describing all exterior materials (i.e. walls, roof, trim, cornice, windows, etc.) Sample materials may be required in some cases (consult with staff);
 - f. Detailed drawings or photographs of all decorative architectural details (i.e. columns, balustrades, modillions, etc.);
 - g. Paint samples and plan keyed to location of each color. (See below)
- 2. Photographs of the subject property to be worked on and surrounding buildings are required.**
 Subject Property photographs
 Surrounding Buildings photographs

The Historic Development Office can provide sample plans for garages, carports, and outbuildings. These are generally acceptable for most domestic sites. Note: These are for design purposes only and are not suitable as construction drawings.

FOR MINOR RENOVATION OR REPAIR TO EXISTING BUILDINGS

For work which includes changes to the exterior of existing buildings, the following is required:

- Elevation drawings with dimensions and material details
- Floor plans
- Photographs of each face of the building to be renovated with details of the areas of work.

EXTERIOR PAINTING

Period color schemes are encouraged. However, other colors may be acceptable. Submit name and color samples for:

Manufacturer
main body color
trim or decorative features
porch deck
accent areas: lattice, shutters, etc.
other areas

FENCES, DRIVES AND GATES

1. A drawing or photograph of the type of fence, wall or gate with the height noted.
2. A site plan, with dimensions, showing the placement of any proposed change to the property as it relates to property boundaries and all other building or site facilities.
3. A description of the materials to be used.
4. Paint samples, if the fence, wall or gate is to be painted.

SIGNAGE

Width of sign _____ feet _____ inches

Height of sign: _____ feet _____ inches

Single Face _____ Double Face _____

Height (from ground level to top of sign) _____ feet _____ inches

Height (from ground level to bottom of sign) _____ feet _____ inches

Total Square Footage of Signage: _____ square feet. (Both sides if double-faced)

General Description

Type of Sign: Monument Free Standing Projecting Wall Banner Sandwich Board

How will sign be mounted:

Sign Materials (sample materials may be requested by the Review

Board): _____

Describe type of lighting to be used: _____

Linear front footage of principle building: _____ feet _____ inches.

Square footage of Existing Signage: _____ feet _____ inches N/A _____

Include in Application:

Scaled colored renderings of the requested sign; or photographs with dimensions

Photographs of the building

A site plan or building elevation showing the location of the proposed signage For specific requirements, refer to *Sign Design Guidelines for Mobile's Historic District and Government Street*.

DEMOLITION APPLICATION

Purchase Date: _____

Purchase Price: _____

Current appraised value of the property? _____ (N/A if Not Available)

Was the property occupied at time of purchase? _____ What was the property's condition? _____

What alternatives to demolition have you considered for this property?

Have you listed the property for sale or lease since your purchase? Yes No

If "Yes", what was your asking price? _____

How many offers did you receive? _____

List any options currently held for the purchase of the property, including the price received for such option, the conditions placed on such option and the date of expiration of such option:

Do you have construction plans ready to complete the replacement project? Yes No

If so, how much have you expended on the plans? _____

What are the dates of these expenditures? _____

In order to determine your ability to complete the replacement project, do you have the following:

Performance Bond Yes No

Letter of Credit Yes No

Trust for completion of improvements Yes No

Other evidence of financial ability Yes No

Letter of commitment from a financial institution Yes No

"In no event shall the Board entertain any application for the demolition or relocation of any Historic Property unless the applicant also presents at the same time the post-demolition or post-relocation plans for the site."
Ordinance #44-084

An Architectural Review Board Application with supporting documentation and fee should accompany this request with the plans for development of the site. A sign will be placed in the front yard of the property prior to the Review Board meeting to notify surrounding property owners of a pending application. Attendance at the meeting is strongly advised in order for the applicant to respond to any questions.

SEE NEXT PAGE

CONFLICTS WITH OTHER CITY DEPARTMENTS

The Architectural Review Board examines applications solely on the basis of impairment to the historic character of a building or neighborhood. Approval by other City Departments may consider other aspects of a project such as safety. When multiple regulations are in conflict, generally the most restrictive applies. Also, though the staff and Review Board try to inform applicants of possible conflicts, they may not be aware of all the implications of a request. Therefore, the property owner should clear all requests with the appropriate departments.

Signature

Date

Build Mobile, PO Box 1827, Mobile, Alabama 36633

For more information: www.BuildMobile.org | historicdevelopment@cityofmobile.org | 251.208.7281

Visit our help window: Mobile Government Plaza, 205 Government Street, Third Floor South Tower

Revised August 2023

Oakleigh

Single Family Residence

General Notes

- Verification of plan dimensions and elevations: The contractor shall verify all dimensions prior to start of construction. They shall notify the Owner or the engineer if any discrepancies or inconsistencies are found.
- Engineer's limitation of responsibility: The structural drawings for the project represent only the finished structure. The engineer shall not be responsible for the performance of the work required to complete the project, including but not limited to methods used by the contractor, phasing of the work, sequence of the construction, timeliness of the performance of the work, safety on or around and errors or omissions due to negligence of the general contractor or subcontractors. The engineer shall not be responsible for the design and engineering of temporary shoring bracing (see Contractor's responsibility) nor shall the engineer be responsible for any structural due to the inadequacy or inappropriateness of such bracing or braced assemblies.
- The engineer shall not be responsible for any aspects of the project that are not specifically related to or caused by the structural design such as, but not limited to, the following:
 - (a) Architectural design, either new or existing
 - (b) Finishes
 - (c) Aesthetics
 - (d) Non-structural Architectural framing
 - (e) Concealment of structural assemblies
- Contractor's responsibility: The contractor at his own expense shall engage properly qualified professionals or other persons to determine the field layout of all building elements. All work pertaining to structural assemblies and erection of the structural elements shall be performed by skilled workers in the appropriate craft specialties. The contractor shall be responsible for the shoring, bracing, and support of all structural assemblies, components, walls and related framing during construction until the structure is completed, and all materials have developed their ultimate design strength. The contractor shall provide all necessary measures to protect the building or during construction. Such measures shall include but not be limited to the following: bracing, shoring to support loads due to construction equipment and other anticipated loads, or provision to resist accidental loads that might reasonably be expected to be imposed on the work in any stage of completion.
- Conformance: All work shall conform to the minimum standards of the applicable provisions of the governing building code(s), rules of federal and state regulatory agencies, and local ordinances. The term, "work" includes construction practices and materials. The contractor shall review all elements of the structural design, construction drawings, and the specifications described herein for compatibility with the work of other disciplines on the project. All discrepancies, conflicts, errors and omissions shall be brought to the attention of the engineer prior to the fabrication of any component. It shall be the general contractor's responsibility to notify the engineer, for disposition by the engineer, of any conflicts between the structural aspects of the project and the requirements of the above-mentioned codes, regulations, and ordinances prior to commencing work.
- Compatibility: The contractor shall review all elements of the structural design, construction and fabrication drawings, and the specifications for compatibility with the work of other disciplines involved with the project. All discrepancies, conflicts, errors and omissions shall be brought to the attention of the engineer prior to the fabrication of any component, procurement of materials and, in general commencement of the work.
- Elements of the project that require special attention shall include but not be limited to the following:
 - (a) Conflicts between existing site and geological conditions and the structural design
 - (b) Conflicts between civil, Architectural and structural dimensions
 - (c) Conflicts between Architectural drawings or details and the civil, mechanical, Architectural or electrical drawings
- Changes: The contractor shall obtain written approval from the engineer of all proposed changes that may affect the structure, and of all proposed alternate methods of construction which may deviate from the structural design prescribed by the construction drawings before commencing the work.
- Visits to the site: Any visits to the site by the engineer or his field representative for observation of the project work shall not be construed as an inspection or as giving approval of the construction by the engineer.
- ASTM specifications: All material specifications indicated by ASTM designations shall be of the latest revision at the time of issuance of the permit for the project.
- Continuous inspection: The phrase "continuous inspection" means inspection performed continuously by a registered deputy inspector currently licensed by the city, county or state in which the project site is located, and who has been approved by the engineer.
- Imposed loads: The contractor shall insure that all loads imposed on the structure during and after construction are within the limits of the design loads. The engineer shall not be responsible for damage or failure of any part of the structure as a result of loads in excess of the limits of design loads imposed during or after construction is completed.
- Use of drawings: In reading and using the drawings, the following should be considered:
 - (a) All notes listed under general notes shall apply unless amended or otherwise superseded elsewhere on the drawings. Notes indicated elsewhere or specifically keyed to tabulated notes that conflict with the general notes shall be brought to the attention of the engineer prior proceeding with the instructions given in said note or notes.
 - (b) The contractor shall check and verify all dimensions. Refer to the Architectural drawings for dimensions not specified on the structural drawings. Field conditions of any existing structural dimensions that differ from the Architectural or structural drawings shall be brought to the attention of the engineer and resolved before proceeding with the construction.
 - (c) Connections and implied construction assemblies that are not specifically described or detailed in the drawings shall be constructed using standard accepted construction practices in compliance with the governing codes and ordinances.
 - (d) When details labeled "typical" or "similar" are shown on the drawings, the contractor shall apply the intent of the detail to the specific condition.
 - (e) Written information and dimensions shall take precedence over graphic information. Do not scale drawings to determine information and dimensions. Information omitted from the drawings that may be required for the work; shall be brought promptly to the attention of the Designer or engineer.

Sheet Index

PROJECT SUMMARY	A-1
SITE PLAN	A-2
ELEVATIONS	A-3
ELEVATIONS	A-4
FLOOR PLANS	A-5
FOUNDATION PLAN	A-6
SCHEDULES	A-7
ELECTRICAL	A-8
ROOF PLAN	A-9
DETAILS	A-10
STRUCTURAL	S0.0
STRUCTURAL	S1.0
STRUCTURAL	S2.0
STRUCTURAL	S3.0

Consultant Directory

CONTRACTOR:
BPCH Builders, LLC
503 Government Street
Mobile, AL 36602

ENGINEERING
Barton and Edgar Engineering
3213 Midtown Park South
Mobile, AL 36606

DRAFTER
Michael Do
DoCo Interiors & Drafting Services
MichaelDoCoInteriors@gmail.com

Property Owner

BPCH Builders, LLC
503 Government Street
Mobile, AL 36602

Legal Description

Legal Desc:
Parcel Number:
Address:
Zoning: R-1
Flood Zone:

New Construction

Single Story Family Residential
Bedrooms: 3
Bathrooms: 2
Garage: 0

Building Data


Building Height: 19.1'
Living Area: 1,393 sq. ft.
Front Porch: 98 sq. ft.
Back Deck: 160 sq. ft.
Total Building Area: 1,393 sq. ft.

VICINITY MAP


AREA MAP

356 Dunham St Mobile AL 36604

1008 Elmira St Mobile, AL 36604


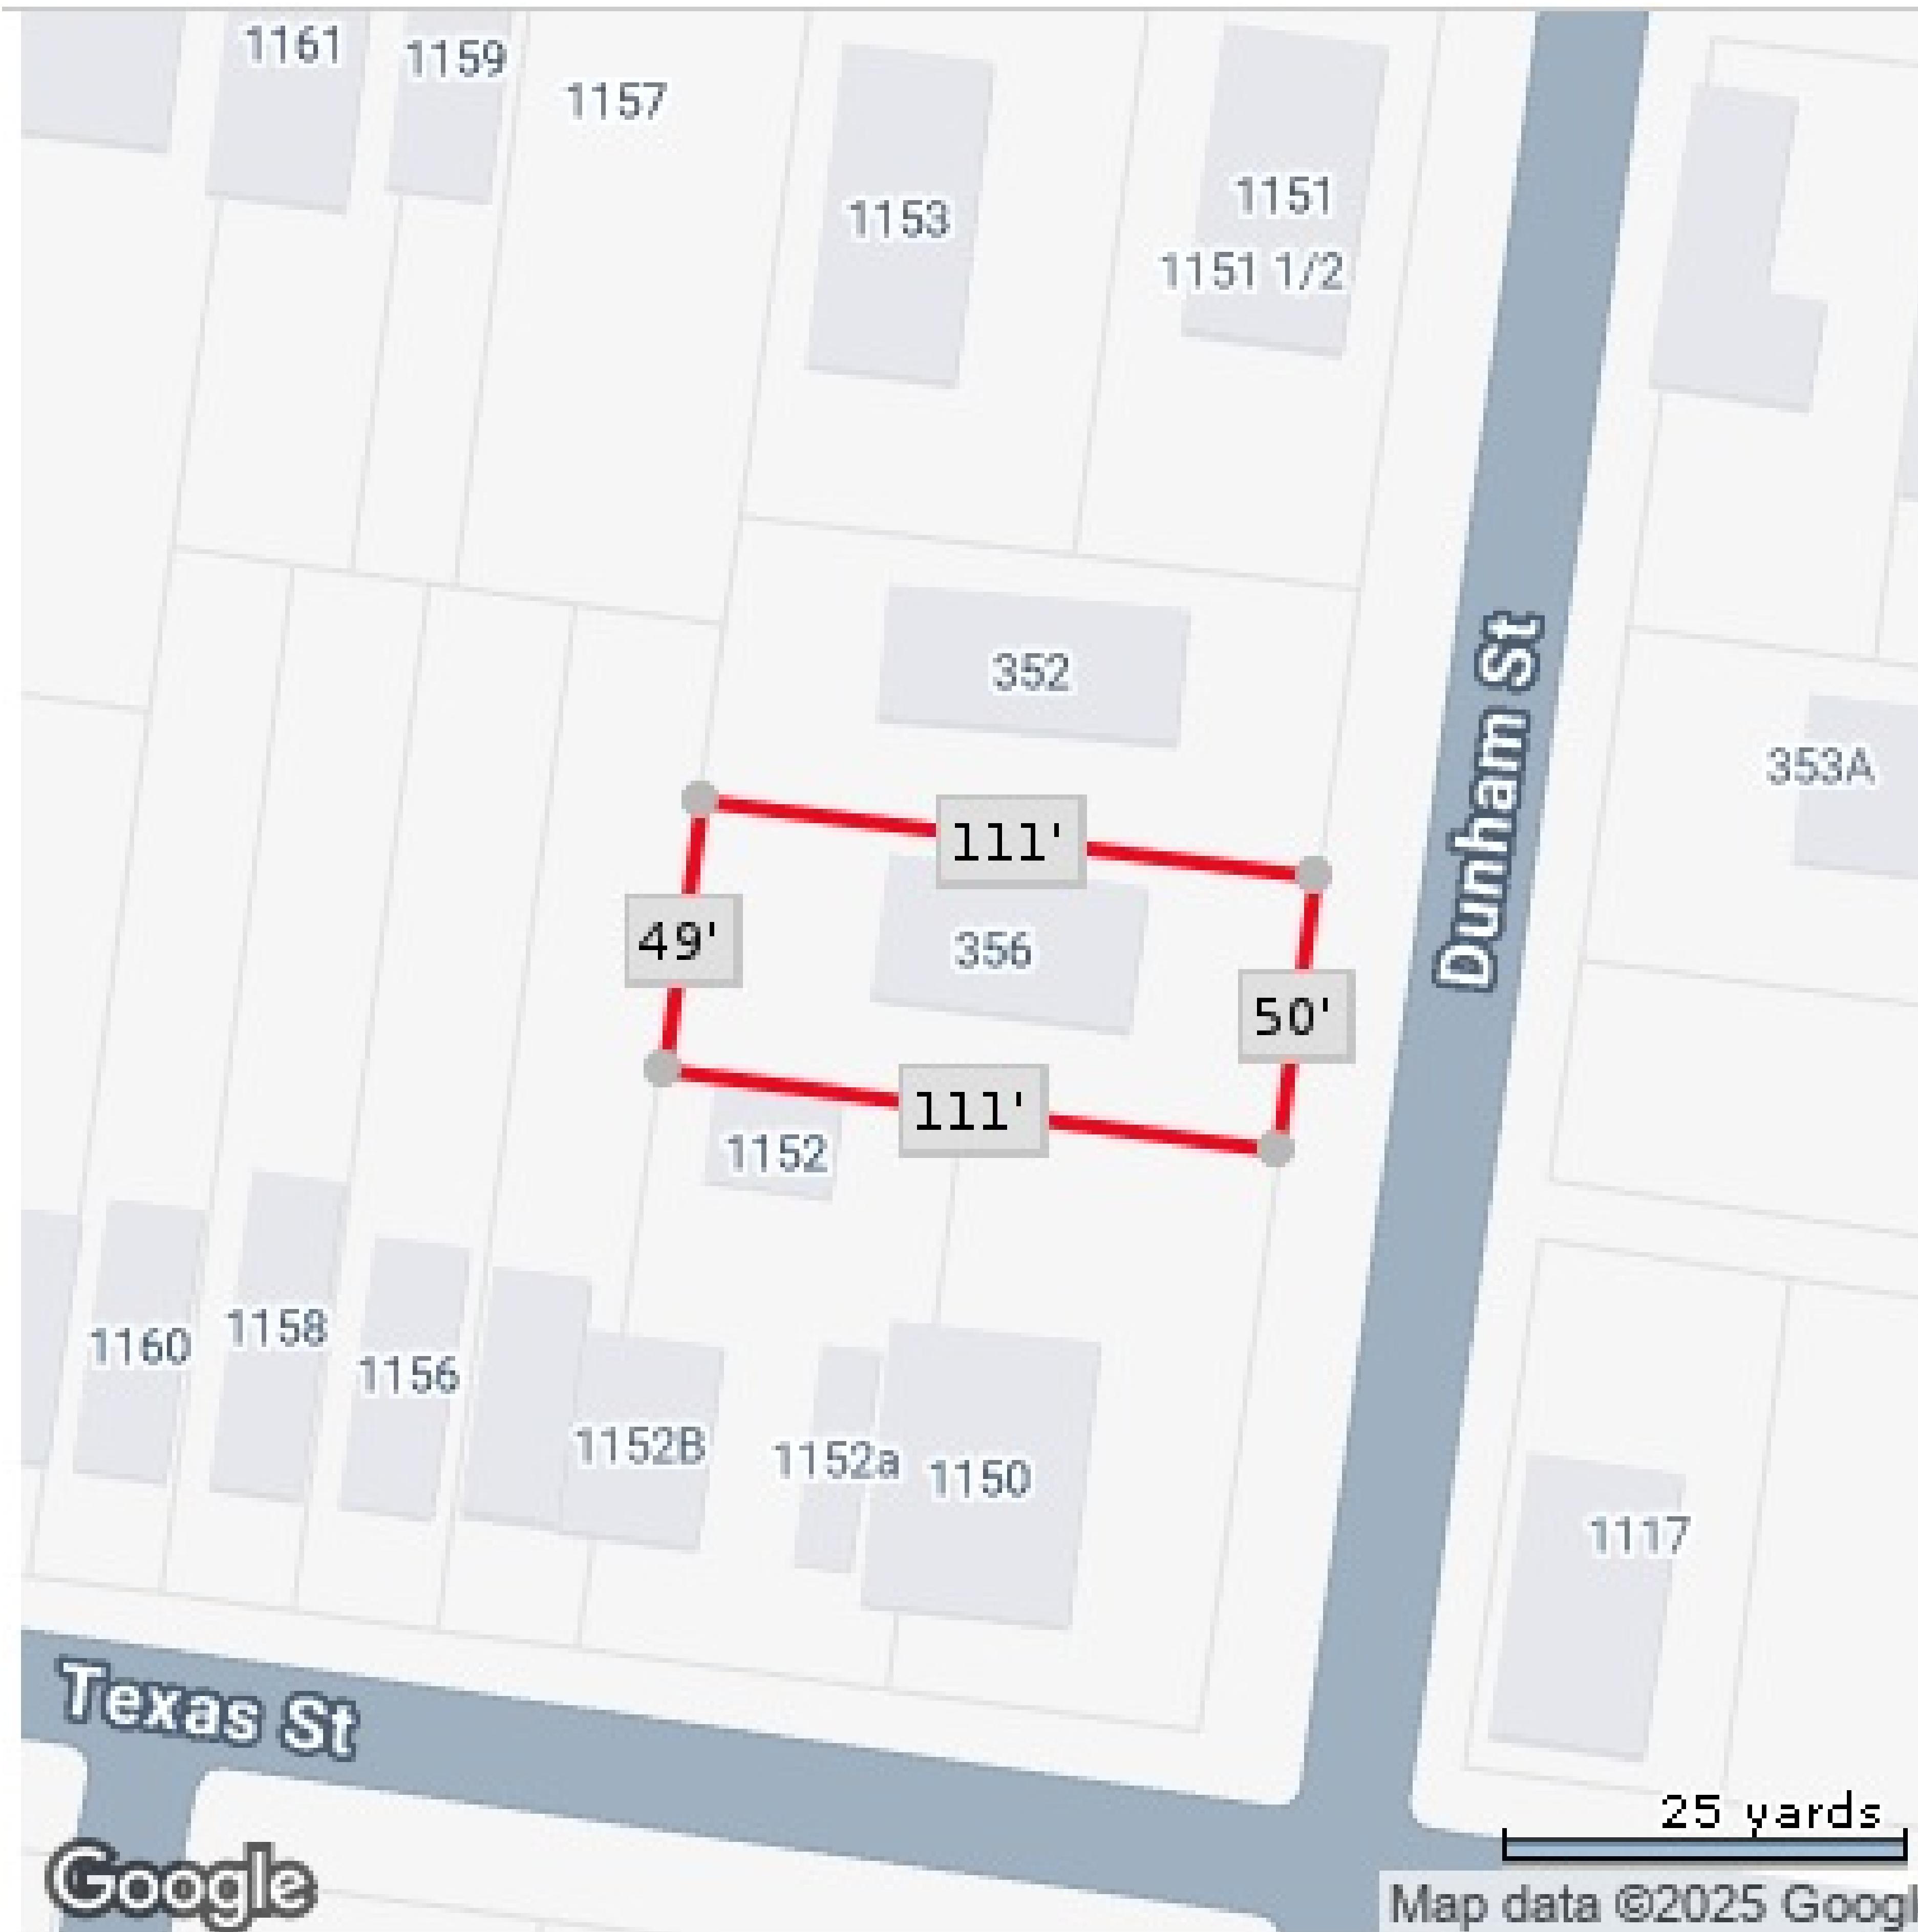


SCREENSHOT 2025-12-08 AT 3:54:42 PM

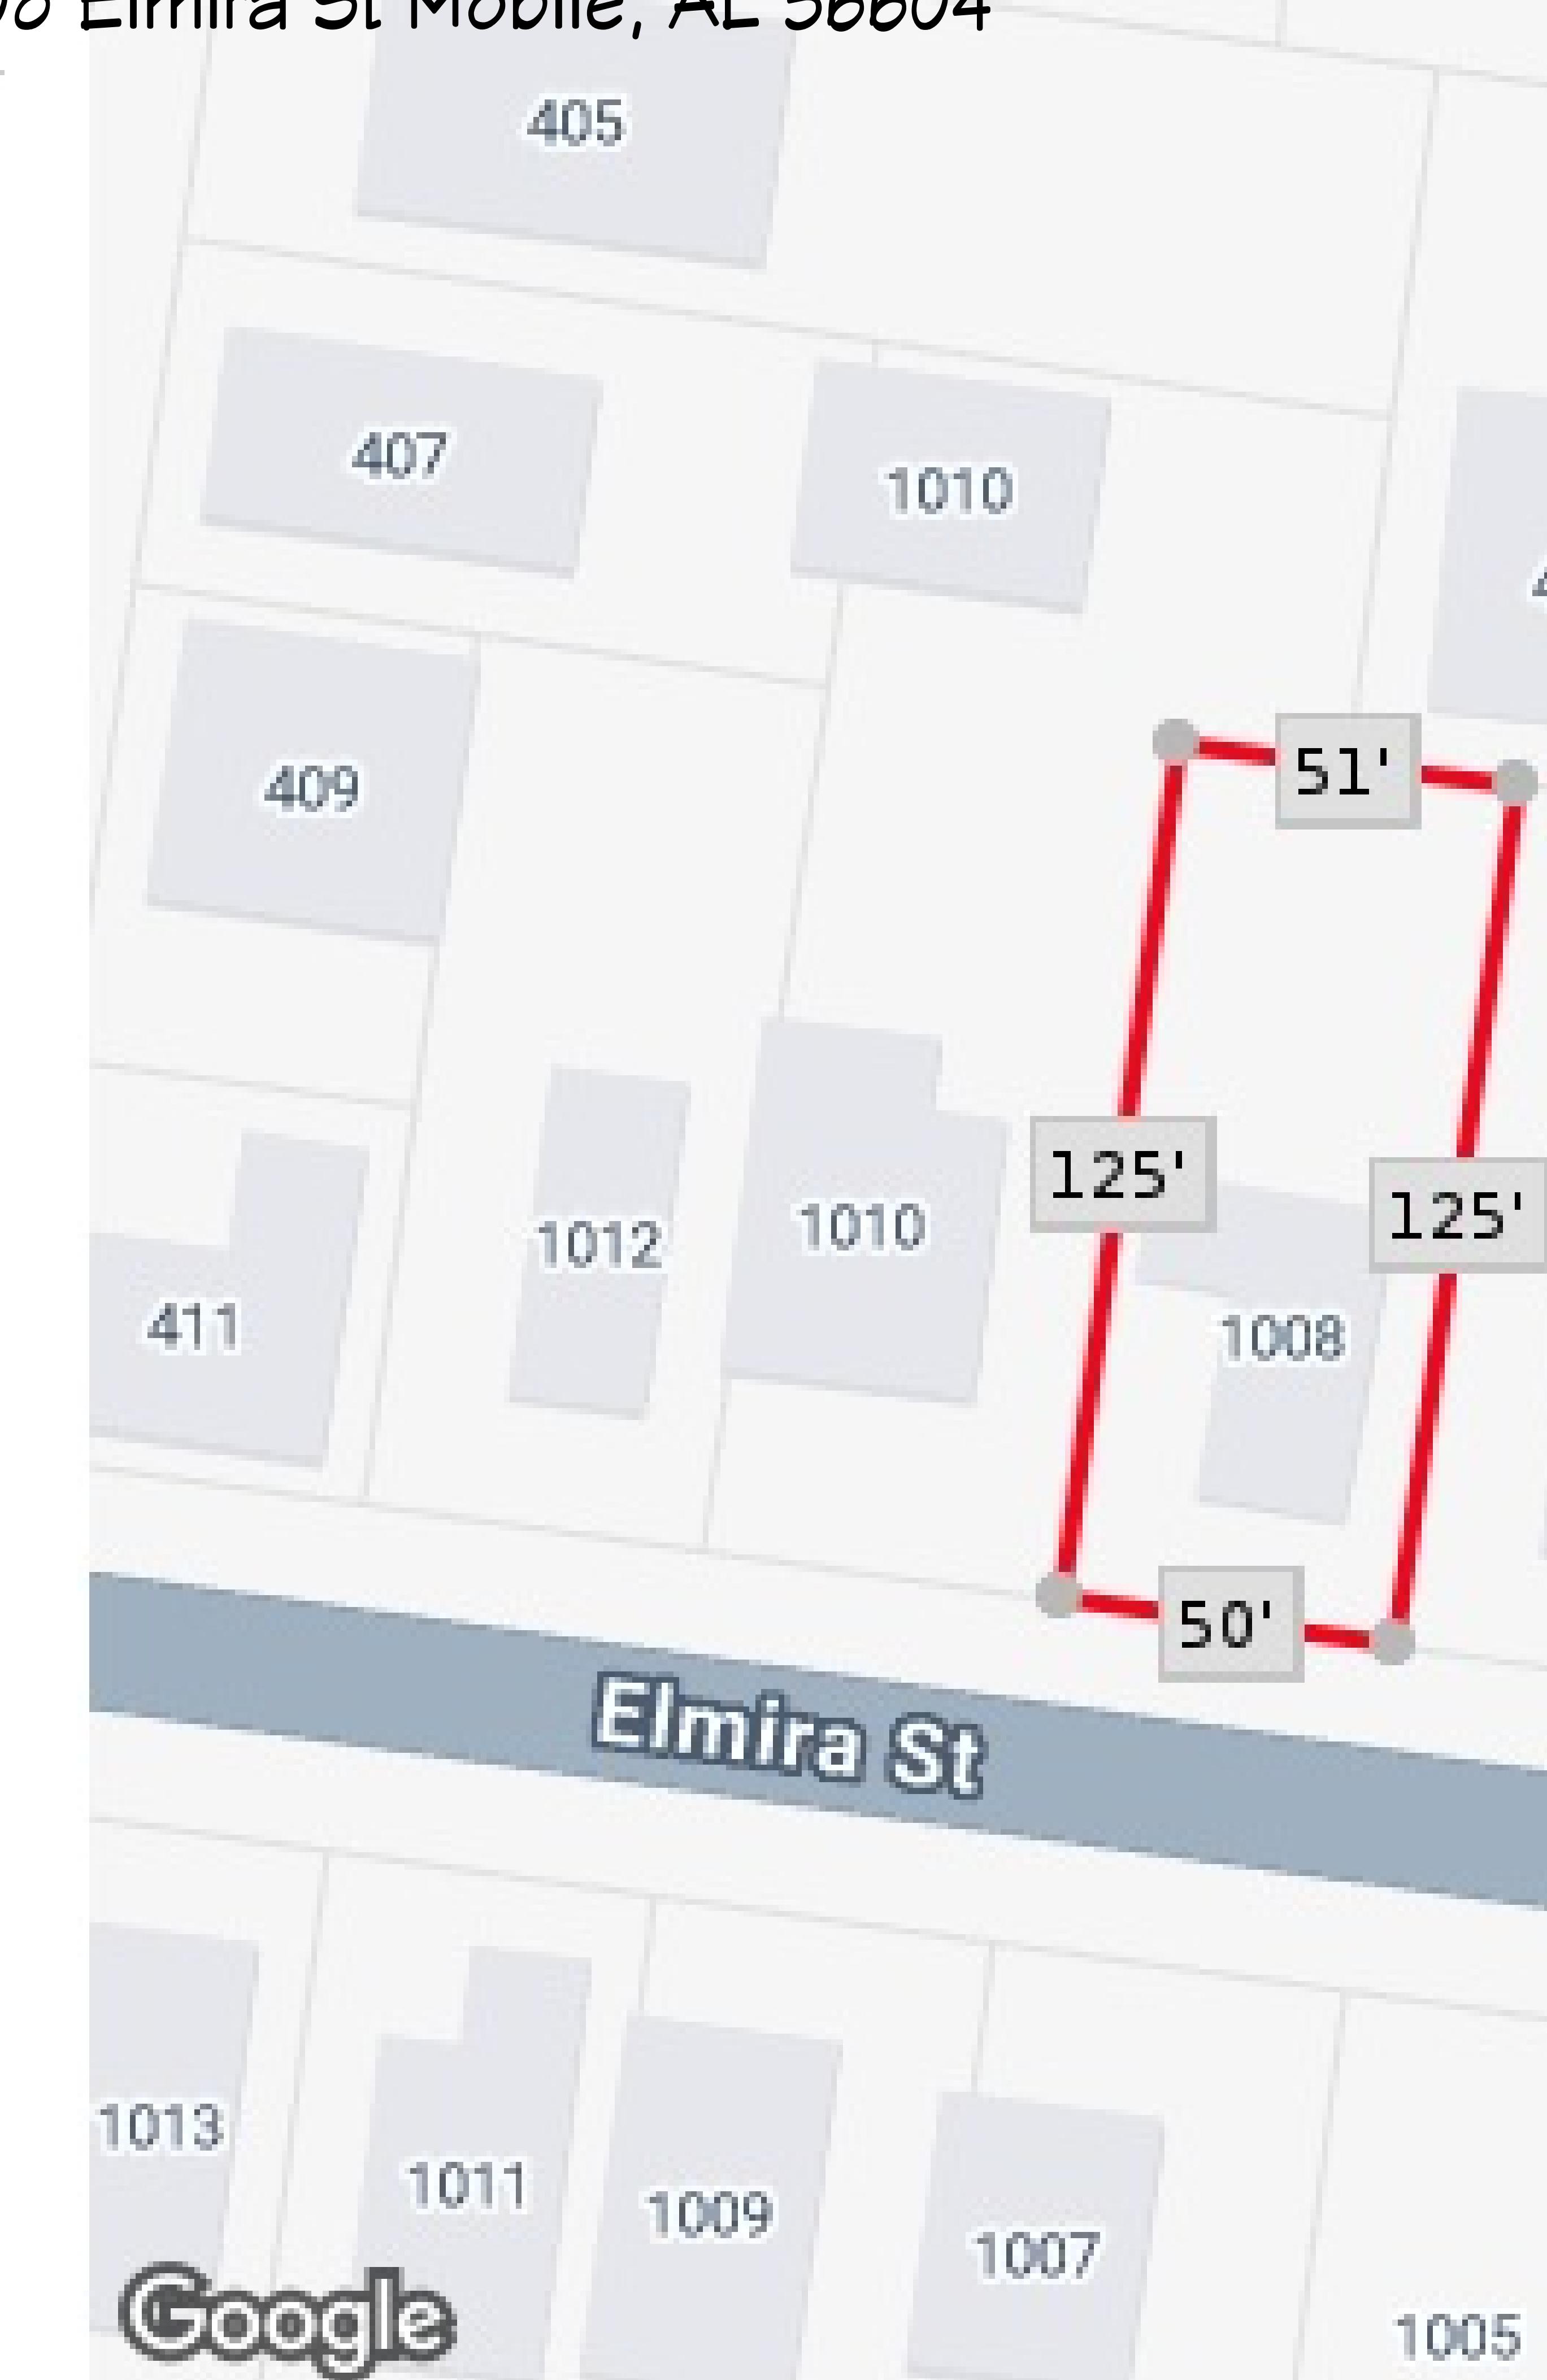

EXTERIOR NOTES:

- 1 CEMENT LAP SIDING
- 2 ARCHITECTURAL SPLIT TAB SHINGLES
- 3 CEMENT BOARD AND BAT SIDING
- 4 BRICK VENEER BASE
- 5 LATTICE
- 6
- 7

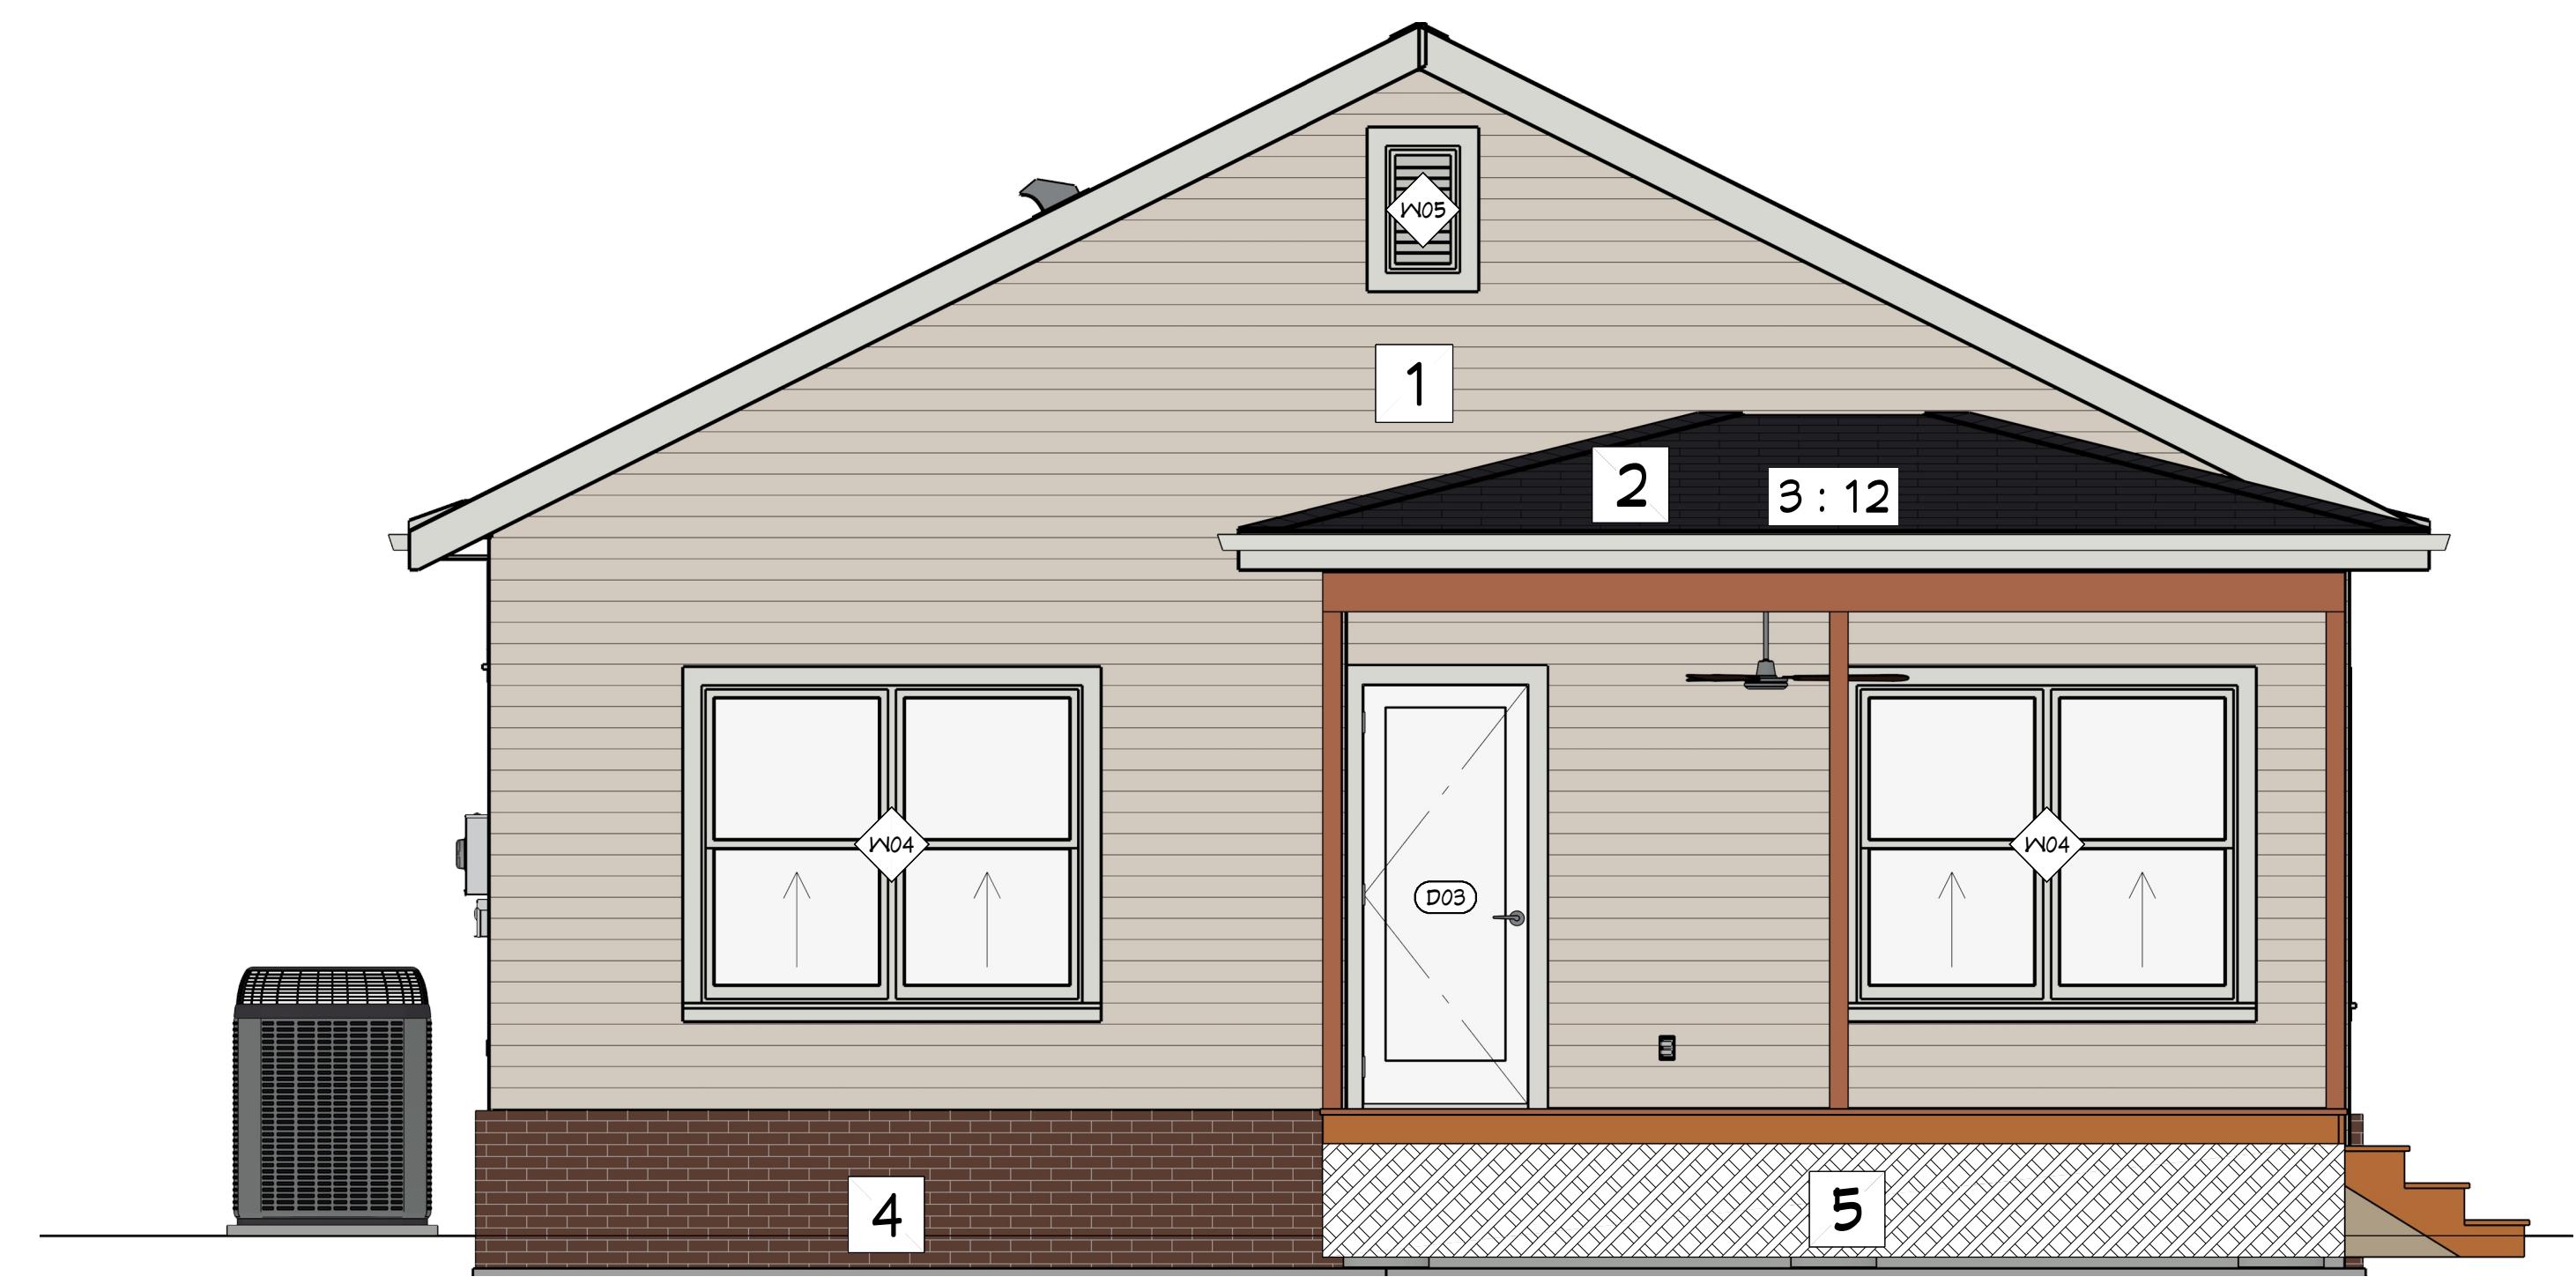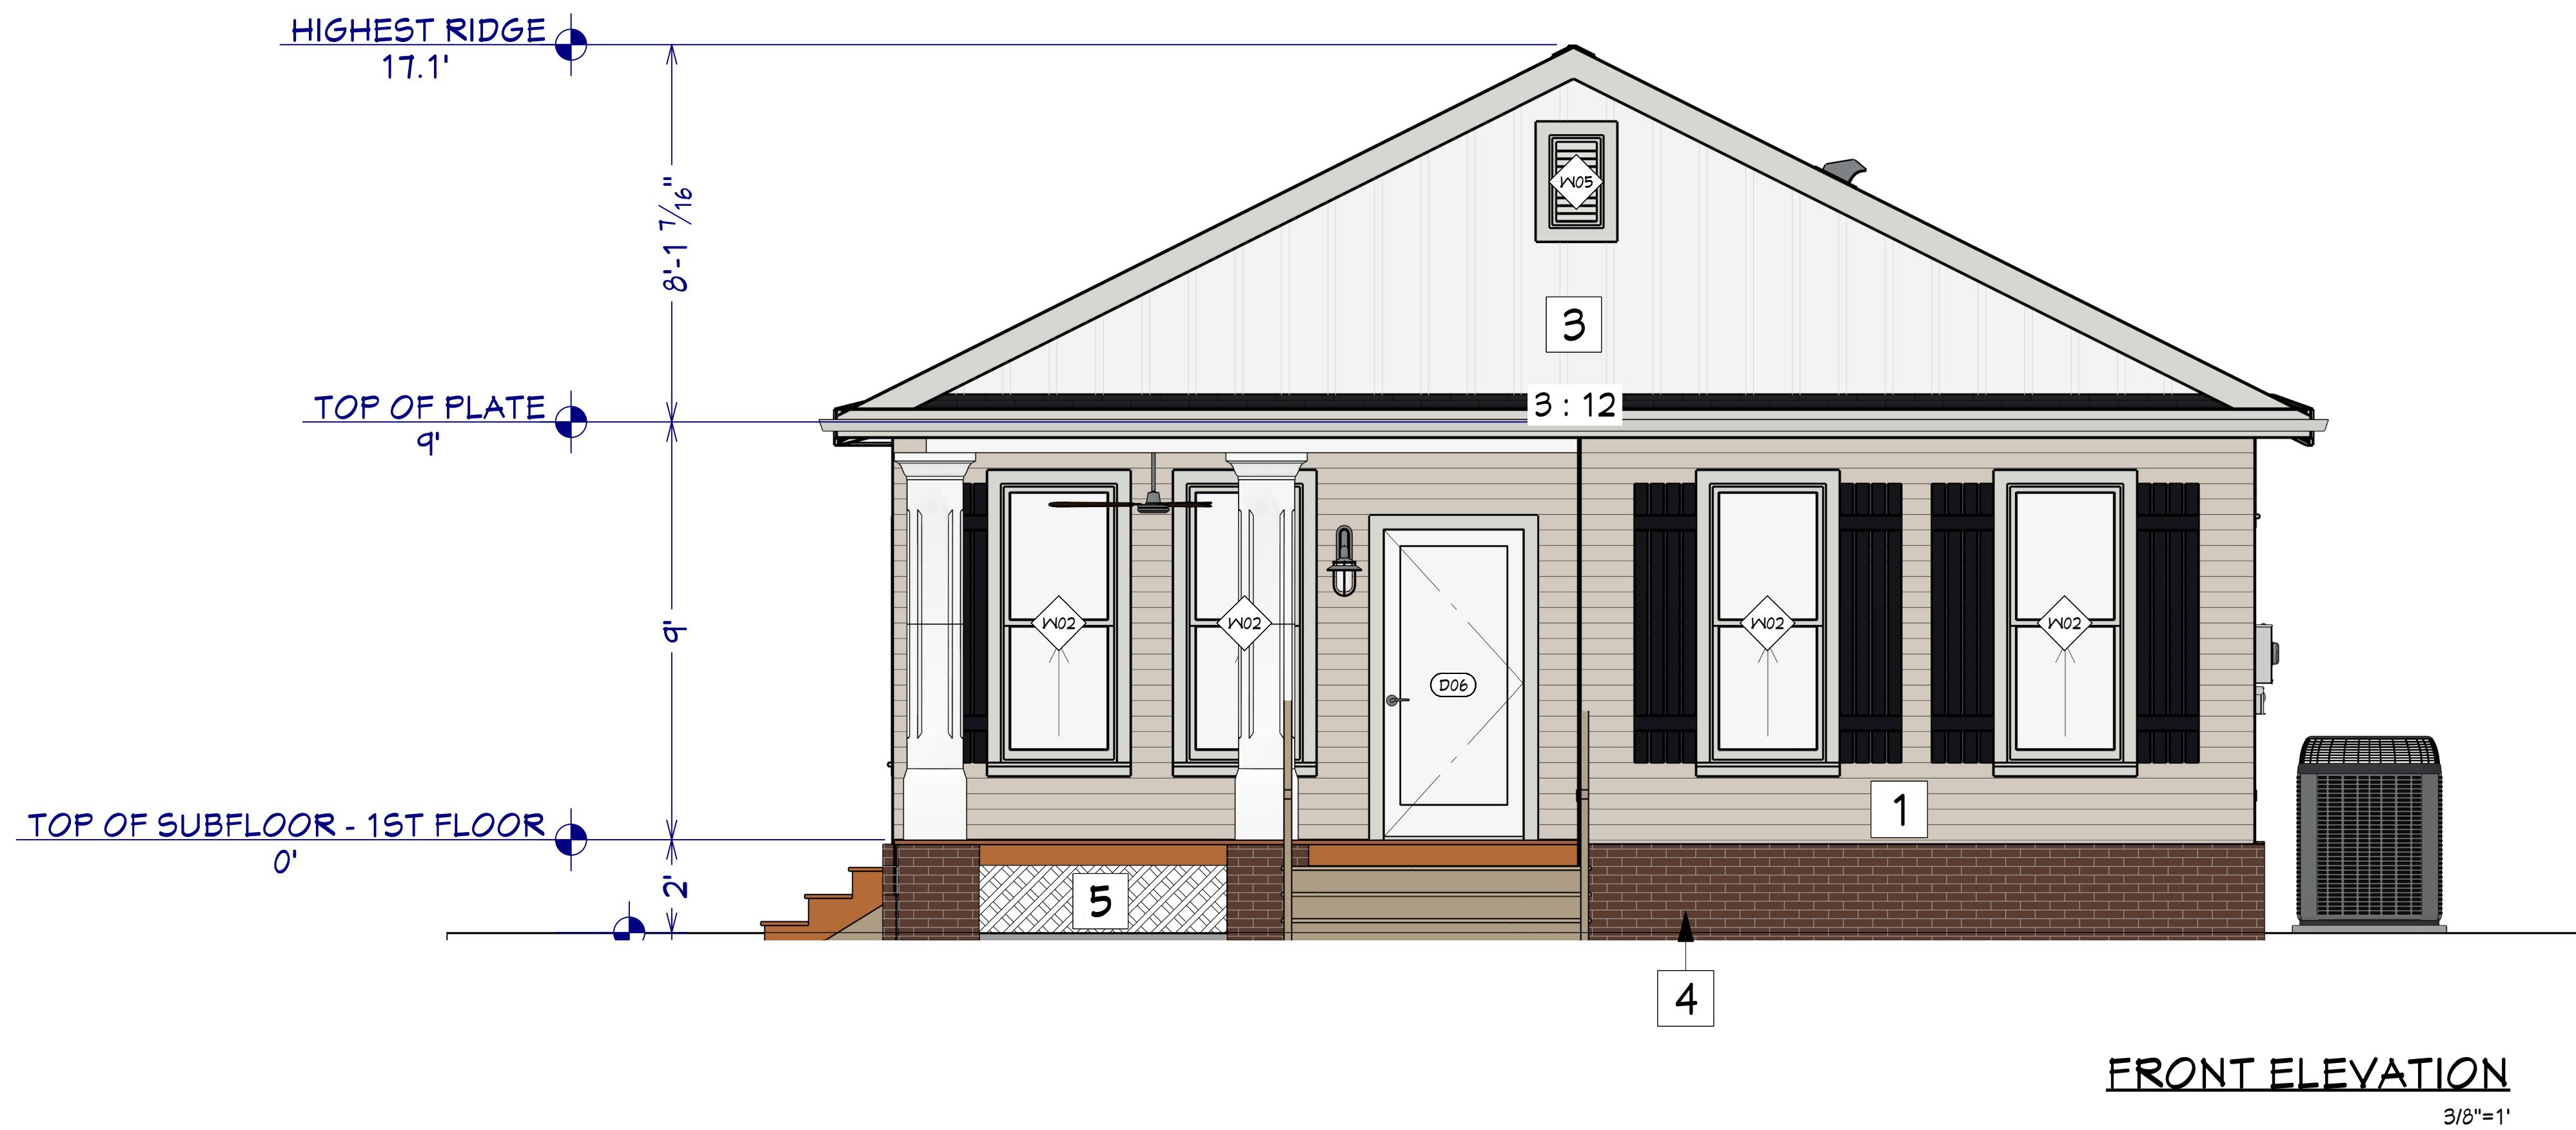

ELEVATIONS

OAKLEIGH

REVISIONS:

△1
△2

SCALE @ 24" X 36"
DATE: 12/17/2025
DRAWN BY: M.D.

SHEET NUMBER
A-3

ELEVATIONS

OAKLEIGH

REVISIONS:
△1
△2SHEET NUMBER
A-4SCALE @ 24" X 36"
DATE: 12/17/2025
DRAWN BY: M.D.

EXTERIOR NOTES:

HIGHEST RIDGE

17.1'

8'-1 7/16"

- 1 CEMENT LAP SIDING
- 2 ARCHITECTURAL SPLIT TAB SHINGLES
- 3 CEMENT BOARD AND BAT SIDING
- 4 BRICK VENEER BASE
- 5 LATTICE
- 6
- 7

TOP OF PLATE

9'

TOP OF SUBFLOOR - 1ST FLOOR

0'

2'

2



RIGHT SIDE ELEVATION

3/8"=1'

HIGHEST RIDGE

17.1'

8'-1 7/16"

TOP OF PLATE

9'

TOP OF SUBFLOOR - 1ST FLOOR

0'



LEFT SIDE ELEVATION

3/8"=1'

A-4

FLOOR PLAN

NOTES:

1. ALL EXTERIOR DIMENSIONS ARE TO THE FRAMING OR MAIN LAYER. DIMENSIONS TO OPENINGS ARE TO THE ROUGH OPENING.

2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND IS RESPONSIBLE FOR ALL DIMENSIONS (INCLUDING ROUGH OPENINGS).


3.



OVERVIEW RENDERING

FOR ILLUSTRATION ONLY NO SCALE

WALL SCHEDULE	
2D SYMBOL	WALL TYPE
	SIDING-4, BOARD AND BAT
	8" CONCRETE STEM WALL
	EXTERIOR 2X4 WALL
	INTERIOR 2X4 WALL
	SIDING-6
	INTERIOR 2X6 WALLS
	GLASS SHOWER

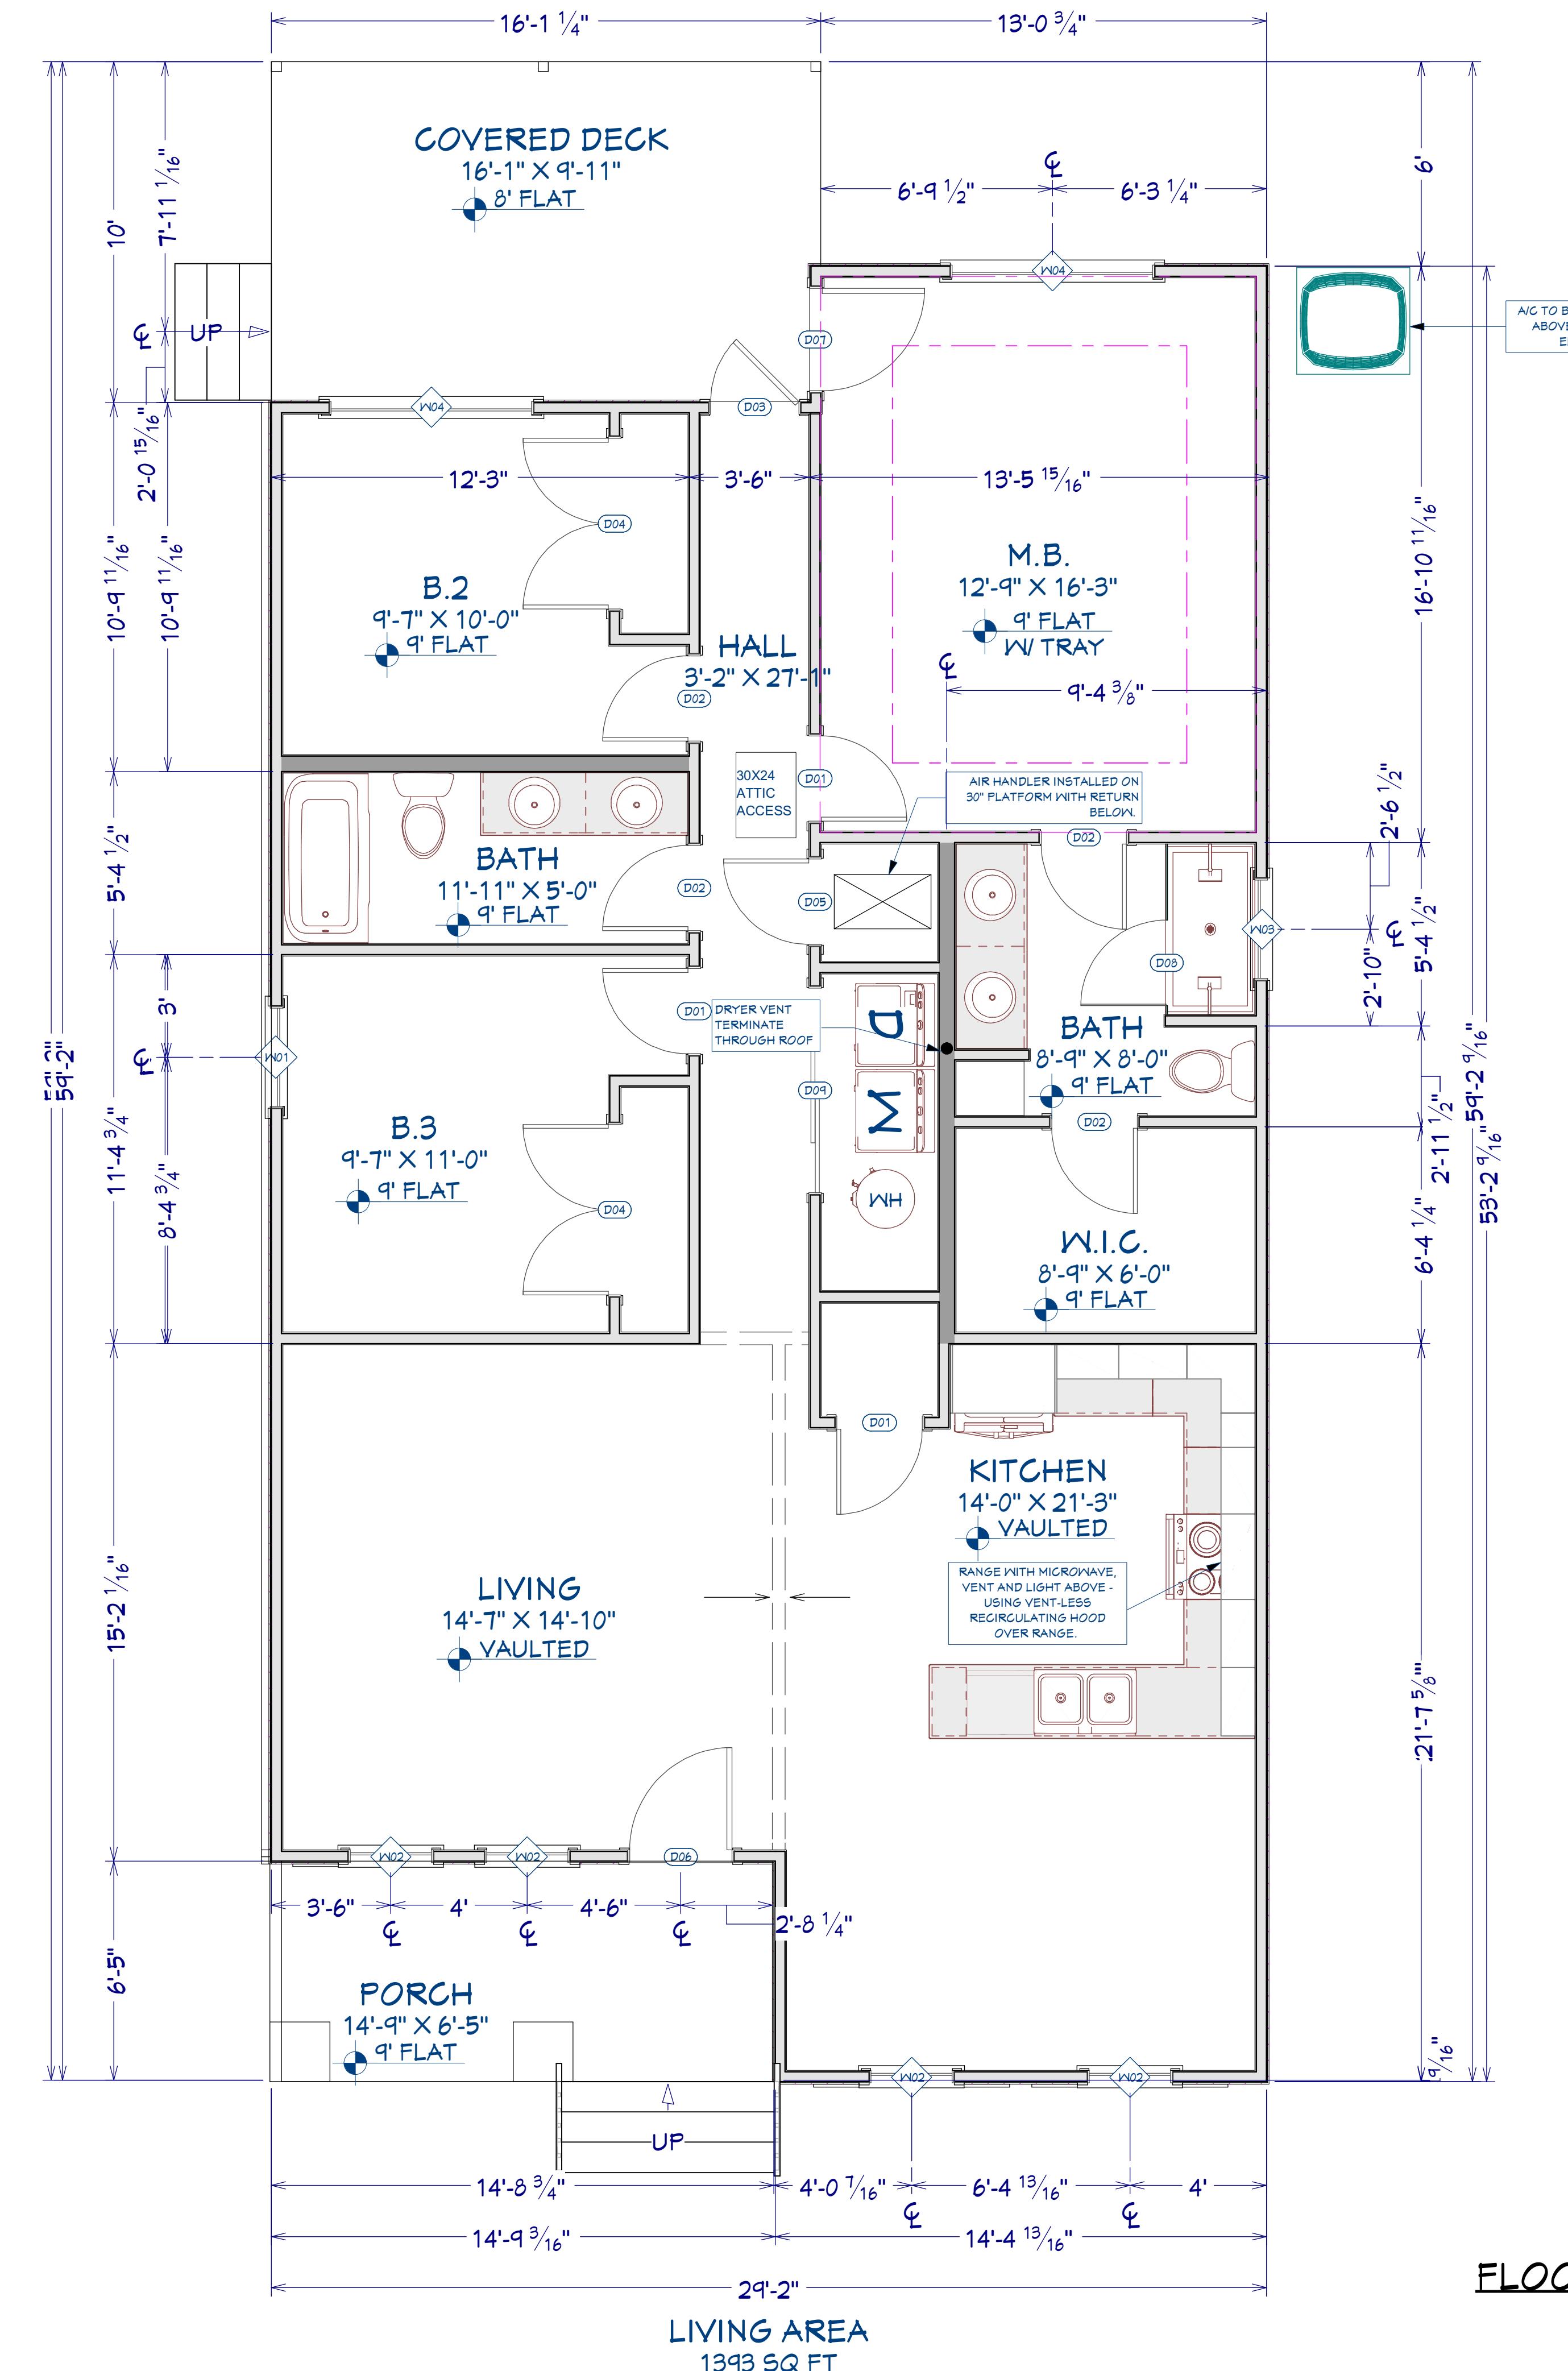

FLOOR PLAN

5/16"=1"

A-5

OAKLEIGH


SCALE @ 24" X 36"

DATE: 12/17/2025

DRAWN BY: M.D.



FLOOR PLANS

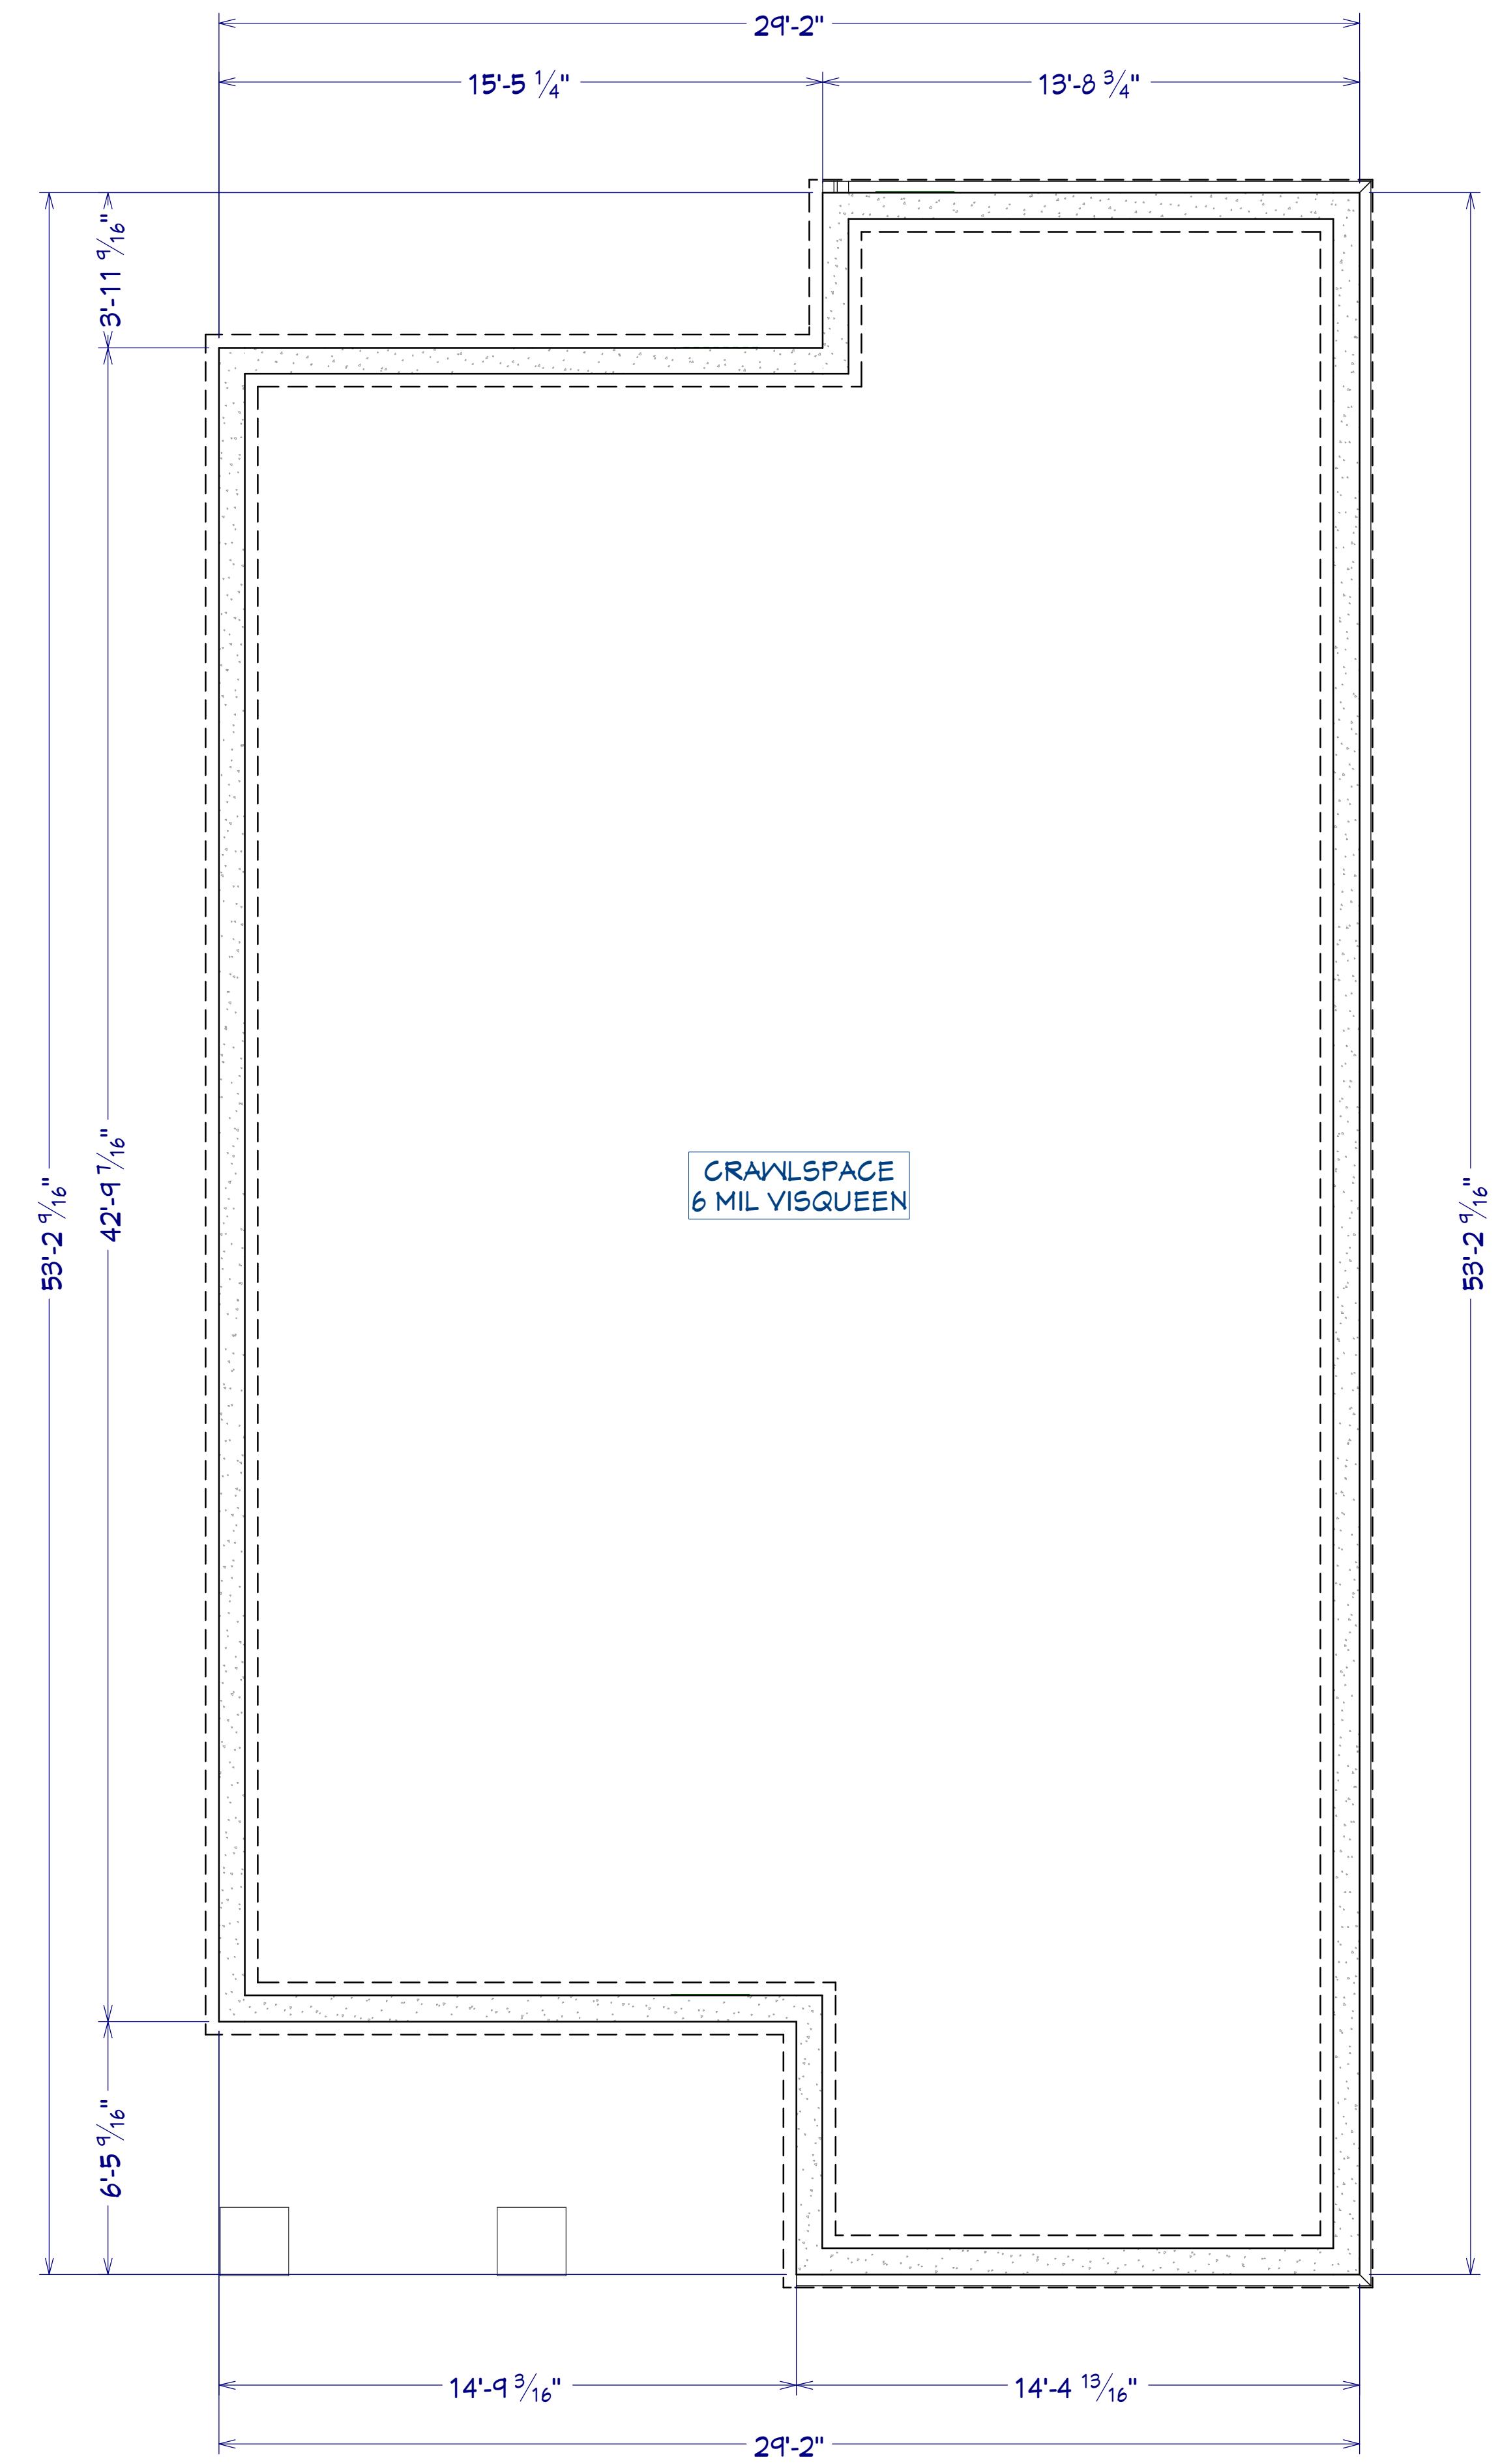

FLOOR PLAN
5/16"=1"

A-6

SCALE @ 24" X 36"

REVISIONS:

1

2

DATE: 12/17/2025

DRAWN BY: M.D.

OAKLEIGH

FOUNDATION PLAN










BLUEPRINT
COMMUNITY HOMES






DOOR NOTES:

1. DOORS SHALL BE 6' 8" UNLESS NOTED.
2. ALL DOORS SHALL BE 1 3/4" THICK
3. INTERIOR DOORS SHALL BE PAINTED: CASING: 4" PAINTED MDF, HEADER 6" PAINTED MDF. BASEBOARD 1x10 MDF, VERIFY WITH OWNER.
4. DOORS BETWEEN GARAGE AND LIVING AREA SHALL BE 1 3/4" TIGHT FITTING SOLID CORE DOORS WITH A RATING OF 60 MINUTES. DOOR SHALL BE SELF CLOSING
5. EXTERIOR DOORS SHALL BE GLASS WITH ALUMINUM CLAD. SEE SCHEDULE
6. EXTERIOR EXIT DOORS SHALL BE 36" MIN. NET CLEAR DOOR WAY SHALL BE 32" MIN. DOOR SHALL BE OPENABLE FROM INSIDE
7. GARAGE DOORS TO BE SECTIONAL INSULATED, OVERHEAD DOORS.
8. ALL GLAZING WITHIN 18 IN. OF THE FLOOR AND/OR WITHIN 24 IN. OF ANY DOOR (REGARDLESS OF WALL PLANE) ARE TO HAVE SAFETY GLAZING
9. ALL TUB AND SHOWER ENCLOSURES ARE TO BE GLAZED WITH SAFETY GLASS
10. BARN DOORS, MEASURE TO FIT OPENING. ALL HARDWARE TO BE STAINLESS, UNO

WINDOW NOTES:

- 1 WHITE VINYL WINDOWS, VERIFY WITH OWNER
- 2 INTERIOR WINDOW MATERIALS: PAINTED, VERIFY WITH OWNER
- 3 WINDOW HARDWARE TO BE OWNER SELECTED AT TIME OF ORDER
- 4 WINDOW ROUGH OPENING: 1/2" FOR TOP/BOTTOM & 1/2" FOR SIDES, UNO BY MFG
- 5 SEE WINDOW SCHEDULE CALLOUT FOR WINDOWS THAT USE A WOOD OR STEEL BEAM FOR THE HEADER
- 6 BEDROOM WINDOWS SILL FINISHED MUST BE WITHIN 44" OF THE FLOOR AND PROVIDE MINIMUM CLEAR OPENINGS OF 5.7 SQ. FEET WITH HEIGHT DIMENSION NOT LESS THAN 24" AND WIDTH DIMENSION NOT LESS THAN 20"

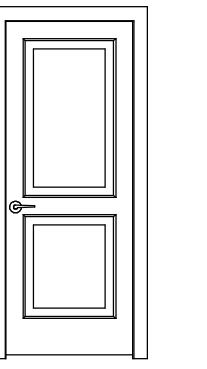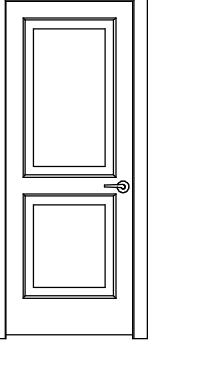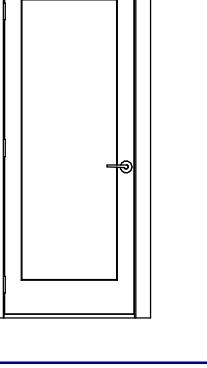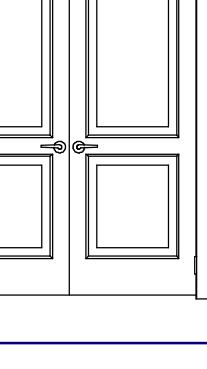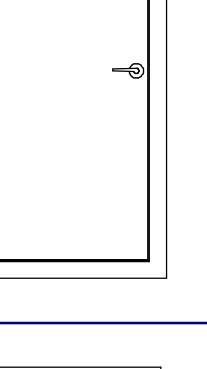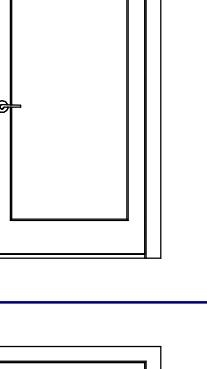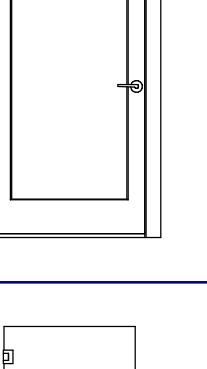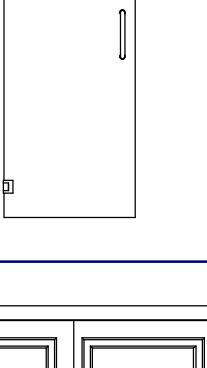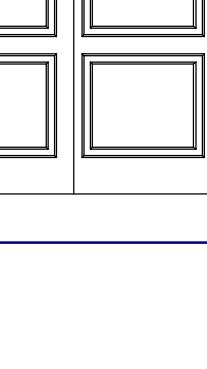DOOR SCHEDULE							
3D EXTERIOR ELEVATION	NUMBER	LABEL	QTY	FLOOR	SIZE	R/O	DESCRIPTION
	D01	2668	3	1	2668 R IN	32"X82 1/2"	HINGED-DOOR P04
	D02	2668	4	1	2668 L IN	32"X82 1/2"	HINGED-DOOR P04
	D03	2768	1	1	2768 R EX	33"X83"	EXT. HINGED-GLASS PANEL
	D04	5068	2	1	5068 L/R IN	62"X82 1/2"	DOUBLE HINGED-DOOR P04
	D05	2650	1	1	2650 R IN	32"X62 1/2"	HINGED-SLAB
	D06	3068	1	1	3068 R EX	38"X83"	EXT. HINGED-GLASS PANEL
	D07	3068	1	1	3068 L EX	38"X83"	EXT. HINGED-GLASS PANEL
	D08	2668	1	1	2668 L	30"X80"	SHOWER-GLASS SLAB
	D09	6068	1	1	6068 R IN	74"X82 1/2"	SLIDER-DOOR P04

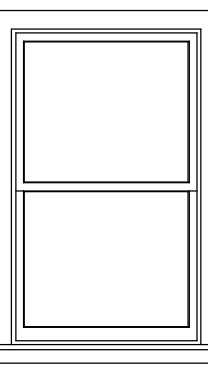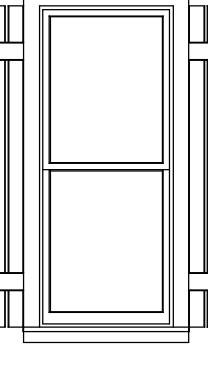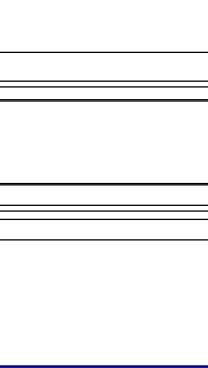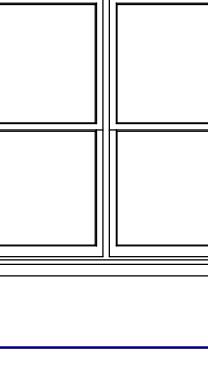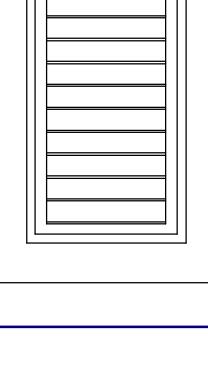WINDOW SCHEDULE								
3D EXTERIOR ELEVATION	NUMBER	LABEL	QTY	FLOOR	SIZE	R/O	EGRESS	
	W01	3050SH	1	1	3050SH	37"X61"	YES	SINGLE HUNG
	W02	2660SH	4	1	2660SH	31"X13"		SINGLE HUNG
	W03	3014FX	1	1	3014FX	37"X17"		FIXED GLASS
	W04	6050MU	2	1	6050	73"X61"		MULLED UNIT
	W05	1220	2	2	1220	15"X25"		LOUVERED

REVISIONS:

1

2


SCALE @ 24" X 36"

DATE: 12/17/2025

DRAWN BY: M.D.

SHEET NUMBER

A-7

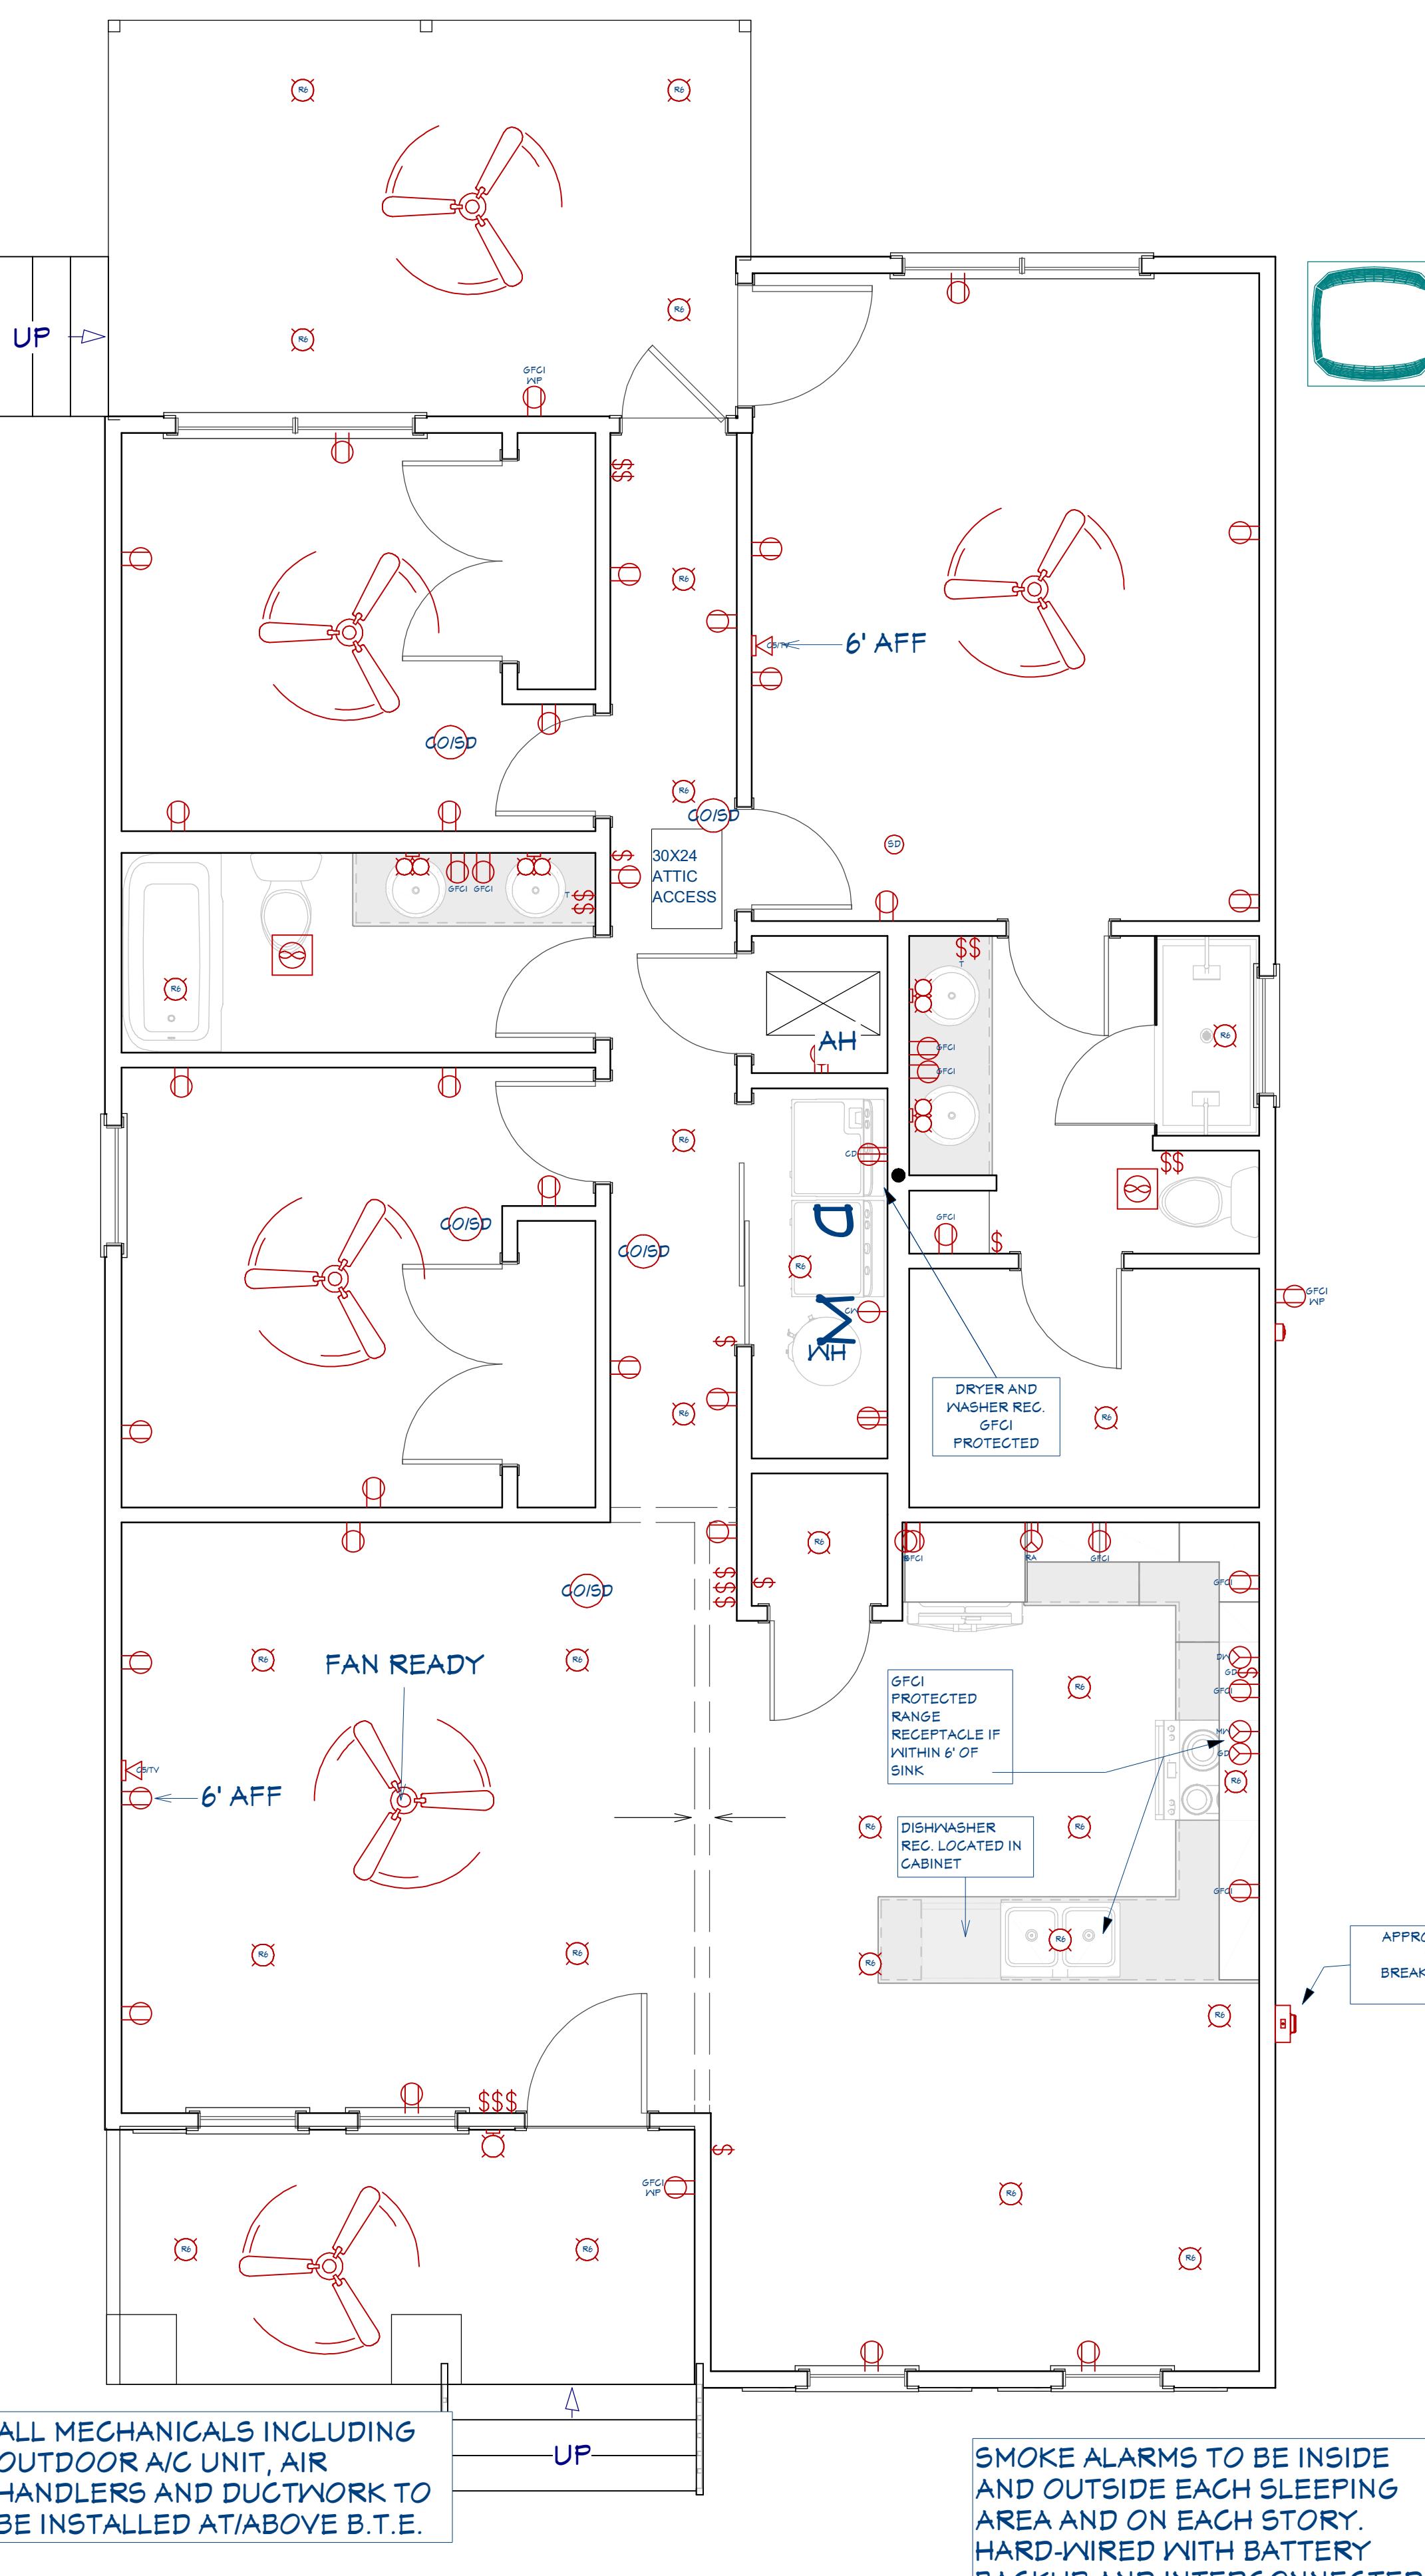
Energy Code Compliance

Effective October 1, 2016

Residential Plan Notes Related to Energy Code


Minimum requirements are 2015 IECC, as modified by the AERC

1. All glazed openings shall have a maximum U factor of 0.35
2. All glazed openings shall have a maximum SHGC of 0.27
3. Attic insulation shall be a minimum of R-30
4. Wall and floor insulation shall be a minimum of R-13
5. Semi-conditioned attics- Where table R402.1.2 requires R-30, an air impermeable insulation installed to the roof deck with R-value of R-20 shall be deemed equivalent to the provisions in R402.2
6. A continuous air barrier shall be installed in the building envelope in accordance with the manufacturer's instructions and the criteria listed in Table R402.4.1.1 (Table N1 102.4.1.1), as applicable to the method of construction.
7. The air barrier in any dropped ceiling/soffit shall have insulation applied and all gaps in the barrier shall be sealed
8. Access doors and Hatches from conditioned spaces to unconditioned spaces (e.g., attics and crawl spaces) shall be weather-stripped and insulated to a level in accordance with the following insulation values:
 - a. Hinged vertical doors shall have a maximum U-Factor of U-0.20 (R-5 minimum)
 - b. Hatches/scuttle hole covers shall have a maximum U-Factor of U-0.05 (R-19 minimum)
 - c. Pull down stairs shall have a maximum U-Factor of U-0.20 with a minimum of 75 percent of the panel area having (R-5 minimum) insulation.
9. Access shall be provided to attic-located mechanical equipment without damage to, or compression of, ceiling insulation. A wood framed or equivalent baffle or retainer is required to be provided when loose-fill insulation is installed.
10. The junction of the top plate and top of walls shall be sealed
11. Rim joist shall be insulated and include the air barrier
12. Eave Baffle- For air-permeable insulations in vented attics, a baffle shall be installed adjacent to soffit and eave vents.
13. Exterior walls adjacent to showers and tubs shall be insulated and the air barrier installed
14. Duct shafts, utility penetrations, and flue shaft openings to the exterior or unconditioned space shall be sealed
15. HVAC register boots that penetrate the building thermal envelope shall be sealed to the subfloor or drywall
16. Building cavities shall not be used as ducts or plenums
17. All supply and return ducts in an unconditioned space shall be insulated to a minimum R-8
18. All supply and return ducts in an semi conditioned space shall be insulated to a minimum R-6
19. Ducts shall be pressure tested to determine air leakage to meet sections R403.3.3 and R403.3.4 Exception: a duct air leakage test shall not be required where ducts and air handlers are located entirely within the building envelope.
20. Mechanical system piping (refrigerant line) capable of carrying fluids above 105 Fahrenheit or below 55 degrees Fahrenheit shall be insulated to a minimum of R-3 suction lines only. Piping insulation shall be protected from damage including environmental damage.
21. Mechanical Ventilation-The building shall be provided with ventilation that meets the requirements 2012 IRC, as applicable, or with other approved means of ventilation. Outdoor intakes and exhaust shall have automatic or gravity dampers that close when the ventilation system is not operating.
22. The building or dwelling unit shall be tested and verified as having an air leakage rate not exceeding 5 air changes per hour. Testing shall be conducted with a blower door at a pressure of 0.2 inches w.g. (30 Pascals). Testing shall be performed at any time after creation of all penetrations of the building thermal envelope.
23. Test Results for Duct, Ventilation and Blower door shall be emailed to [REDACTED] and (1) copy posted in heater closet or pull down stairway.
24. A minimum of 75 percent of lamps in permanently installed lights shall be listed as high efficiency
25. Recessed light fixtures installed in the building thermal envelope shall be air tight, IC rated, and sealed to the drywall
26. An air barrier shall be installed behind electrical or communication or air sealed box shall be installed.
27. New Wood Burning fireplaces shall have tight-fitting flue dampers or doors and combustion air.
28. Insulation Certificate shall be posted in heater closet or pull down stairway.
29. Compliance Certificate- A permanent certificate shall be completed by the builder or registered design professional and posted in heater closet or pulldown stairway and list the requirements of section R401.3


ELECTRICAL SYMBOL DESCRIPTION	
6	220V
	3 BLADE CEILING FAN
	CAT5/6 TV
	GCO/SMOKE DETECTOR
	CAGED LANTERN SCONCE
	CLOTHES DRYER RECEPTACLE
	CLOTHES WASHER RECEPTACLE
	DISHWASHER HARDWIRED
	DUPLEX
	EXHAUST FAN
	FUSER/AC DISCONNECT
	GFCI
	GFCI GND
	GARBAGE DISPOSAL HARDWIRED
	GARBAGE DISPOSAL SWITCH
	MICROWAVE HARDWIRED
	RANGE HARDWIRED
	RECESSED DOWN LIGHT
	REFRIGERATOR RECEPTACLE
	SINGLE POLE SWITCH
	SMOKE DETECTOR 1
	TIMER
	VANITY LIGHT

ALL MECHANICALS INCLUDING OUTDOOR A/C UNIT, AIR HANDLERS AND DUCTWORK TO BE INSTALLED AT/ABOVE B.T.E.

SMOKE ALARMS TO BE INSIDE AND OUTSIDE EACH SLEEPING AREA AND ON EACH STORY. HARD WIRED WITH BATTERY BACKUP AND INTERCONNECTED.

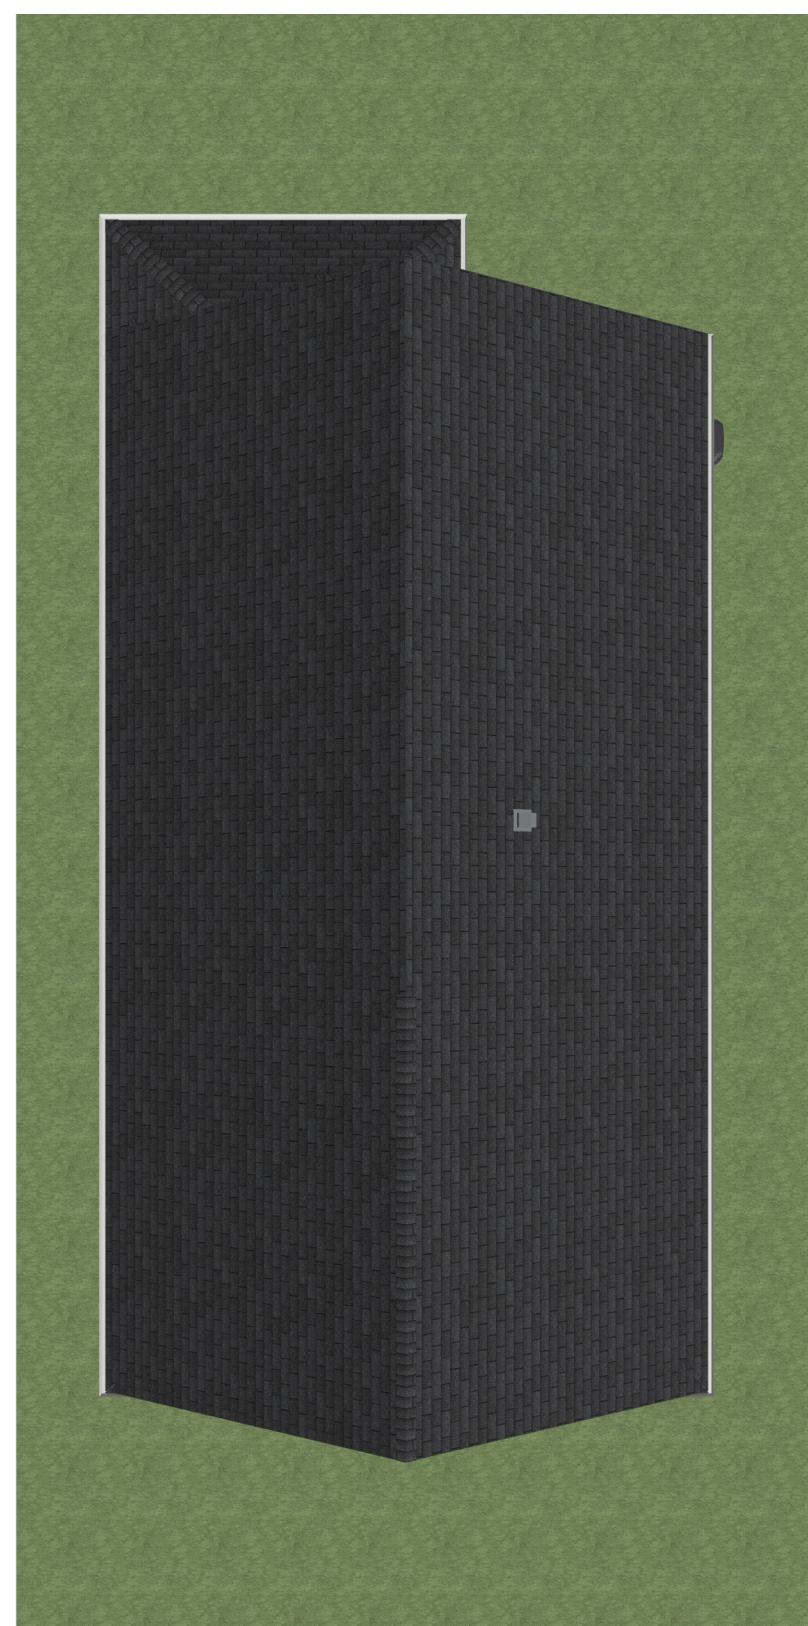

OVERVIEW RENDERING
FOR ILLUSTRATION ONLY NO SCALE

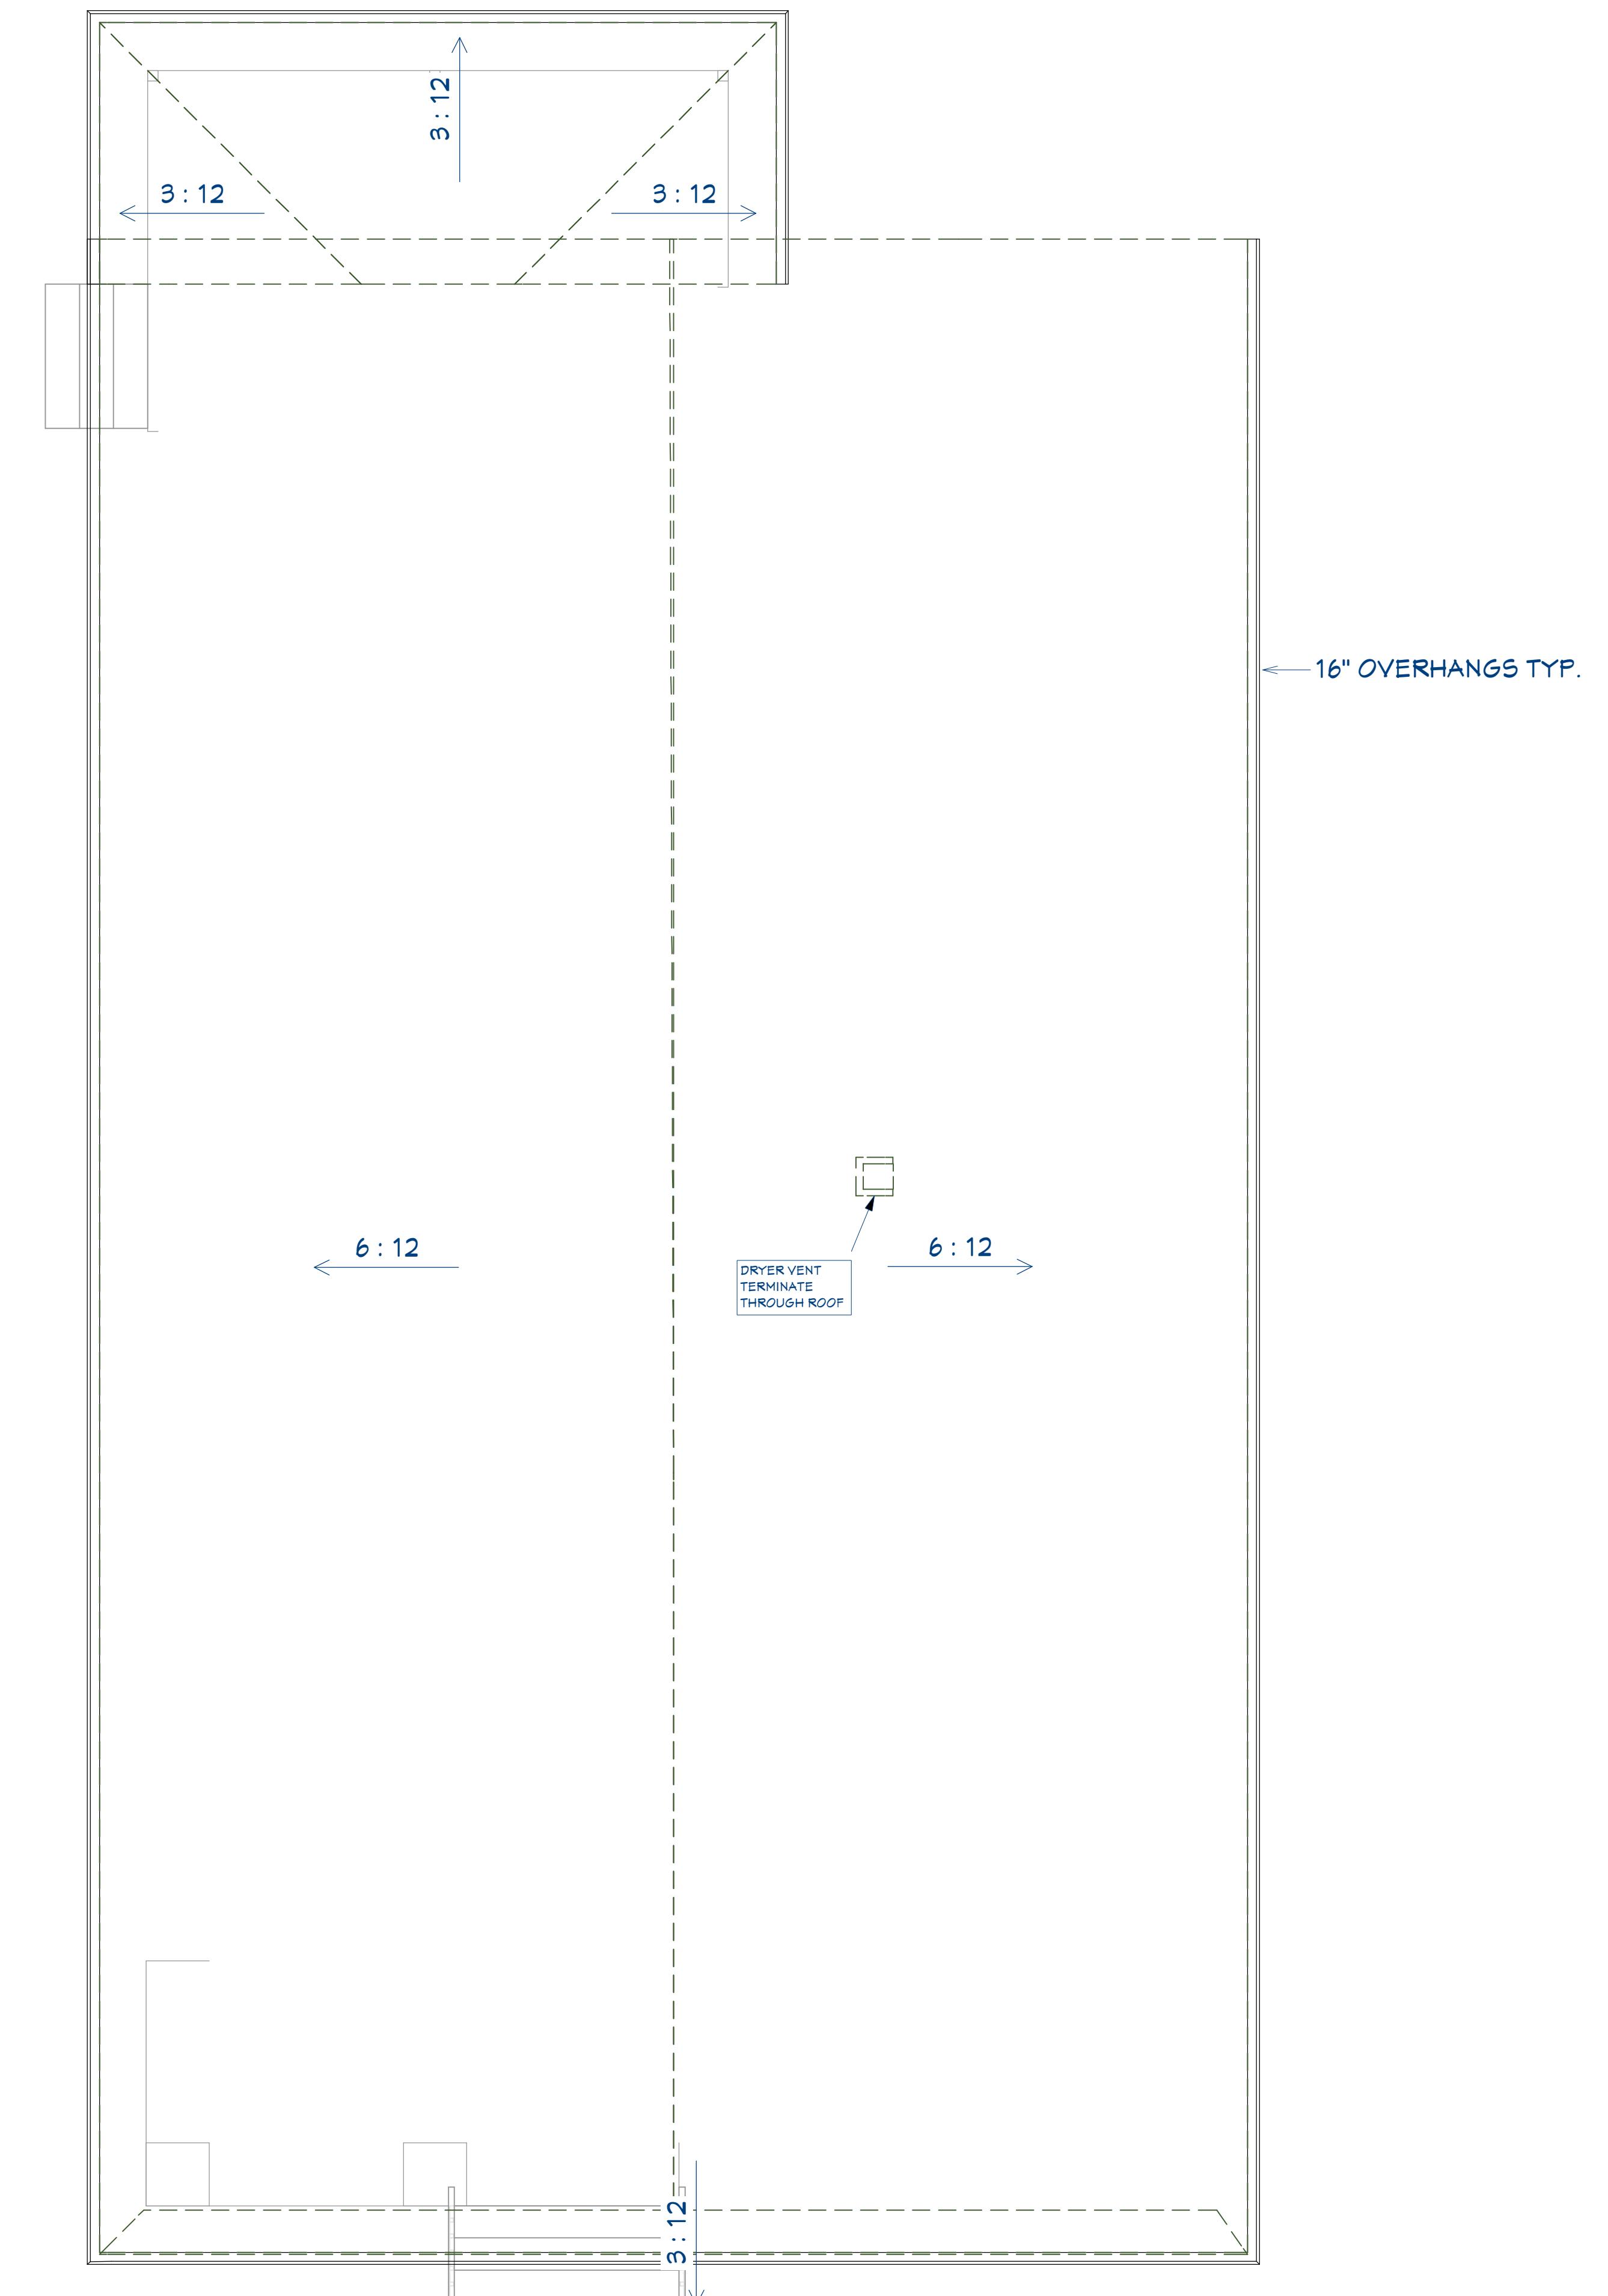

ROOF PLAN
5/16"=1'

A-9

OAKLEIGH

SCALE @ 24" X 36"


DATE: 12/17/2025

DRAWN BY: M.D.

REVISIONS:

△ 1

△ 2

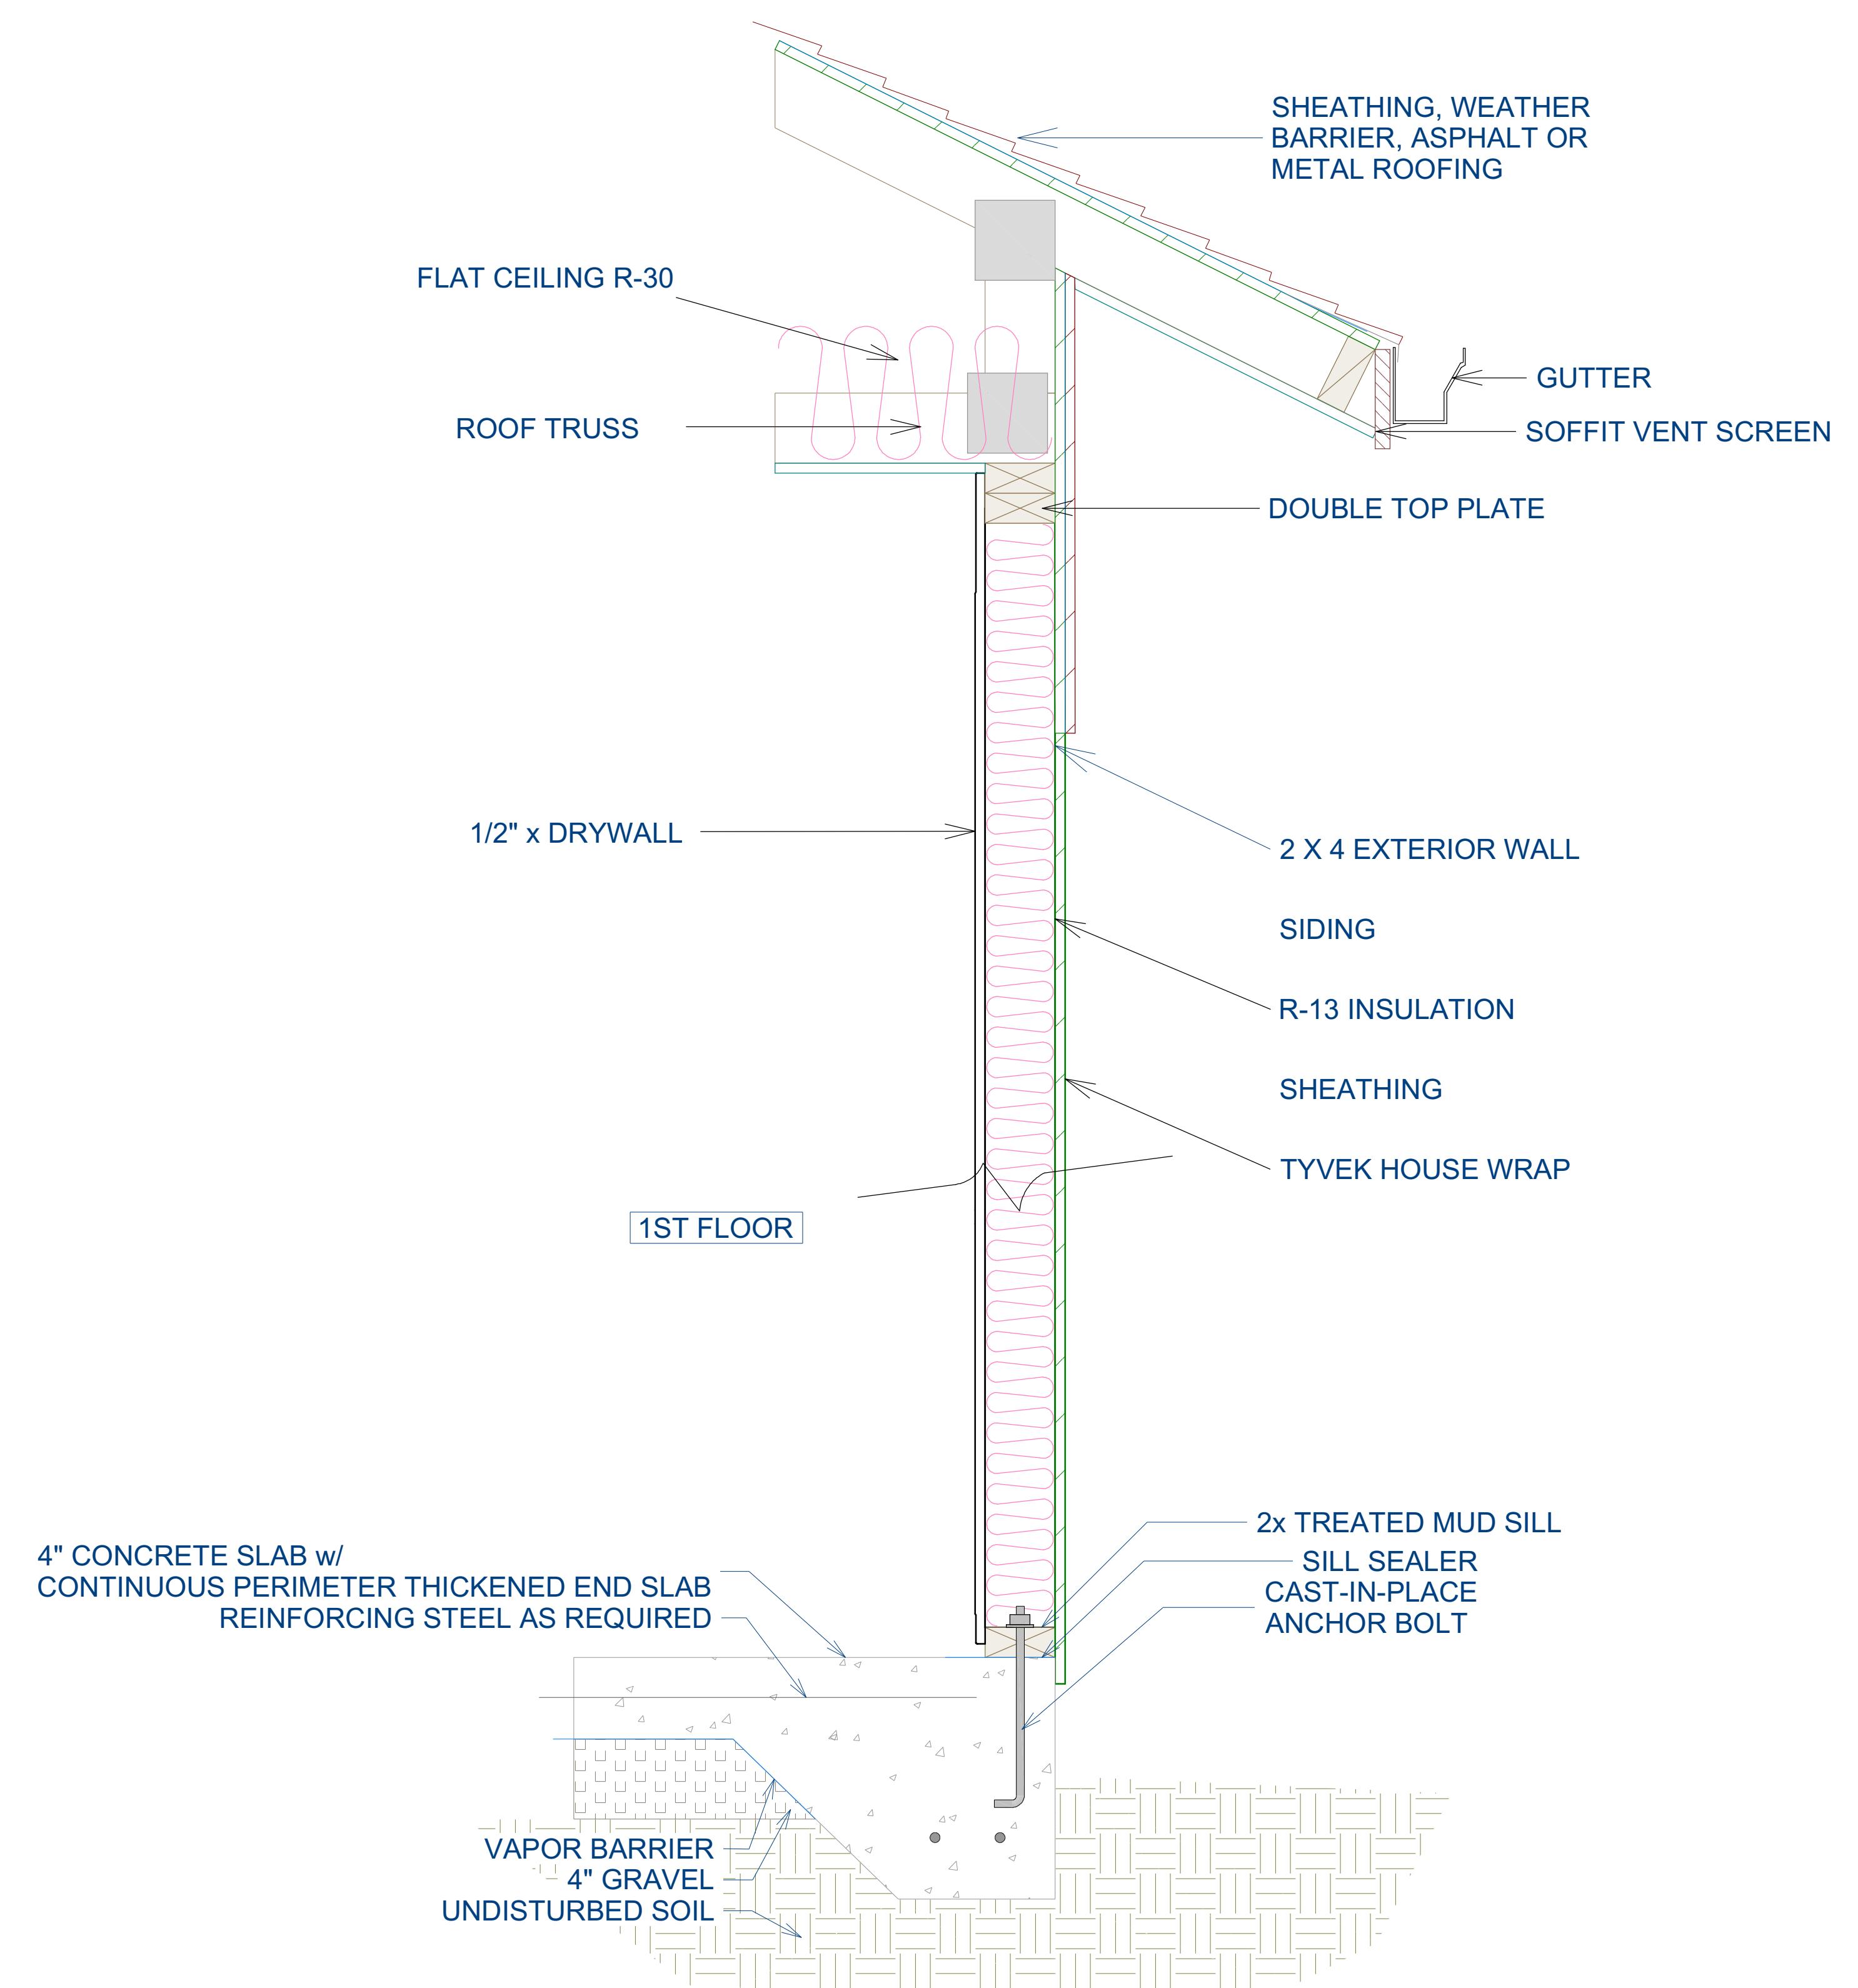DETAILS
OAKLEIGH


SCALE @ 24" X 36"

DATE: 12/17/2025

DRAWN BY: M.D.

SHEET NUMBER

A-10

GENERAL NOTES:

DISCLAIMER:

- THE FOLLOWING SPECIFICATIONS ARE AN OUTLINE OF MINIMUM MATERIAL REQUIREMENTS AND THEIR APPLICATION, MANUFACTURER SPECIFICATIONS AND LOCAL CODE REQUIREMENTS, WHEN IN EXCESS OF MINIMUM SPECIFICATION, SHALL CONTROL. IT IS THE CONTRACTOR RESPONSIBILITY TO REVIEW AND SUBMIT ALL SHOP DRAWINGS AND REPORT ALL DOCUMENT DISCREPANCIES TO THE STRUCTURAL ENGINEER PRIOR TO FABRICATION OR ERECTION.
- AT CONSTRUCTION ISSUE, THESE DRAWINGS REPRESENT STRUCTURAL COMPONENTS IN THEIR FINAL AND FINISHED STATE. CONSTRUCTION PROCEDURES, BRACING METHODS, SAFETY PRECAUTIONS OR MECHANICAL REQUIREMENTS USED TO ERECT THEM ARE THE SOLE RESPONSIBILITY OF THE GENERAL CONTRACTOR OR SUBCONTRACTOR PERFORMING THE WORK.

BUILDING DESIGN CRITERIA:

A. CODES

2018 INTERNATIONAL RESIDENTIAL CODE
BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE (ACI 318)
BUILDING CODE REQUIREMENTS FOR CONCRETE MASONRY STRUCTURES (ACI 531)
ASCE 7-16

B. DESIGN LOADS

FLOOR DEAD LOAD	18 PSF
FLOOR LIVE LOAD	40 PSF
ROOF DEAD LOAD	18 PSF
ROOF LIVE LOAD	20 PSF - REDUCIBLE

C. WIND LOADS PER ASCE 7-16 & 2018 IBC


RISK CATEGORY II
ULTIMATE DESIGN WIND SPEED, V_{ult} = 145 MPH ♦
NOMINAL DESIGN WIND SPEED, V_{asd} = 112 MPH *
EXPOSURE CATEGORY = B
MEAN ROOF HEIGHT, h = ±13.50 FEET
ADJUSTMENT FACTOR FOR HEIGHT AND EXPOSURE, Λ = 1.00
TOPOGRAPHIC FACTOR, K_{zt} = 1.00
 a = ±3.0 FEET
ROOF SLOPE, θ = $\frac{\pi}{2}$ = 26.6°

COMPONENTS AND CLADDING DESIGN PRESSURES **
REFERENCE: FIGURE 30.5-1 & SECTION 30.5.2 OF ASCE 7-16

ZONE	TRIB.	COMPONENT	PRESSURE
	AREA	POSITIVE (+)	NEGATIVE (-)
ROOF	1	10	+13.8
	2e	20	+12.5
		50	+10.7
		100	+10.0***
	2n	10	+13.8
2r		20	+12.5
5e		50	+10.7
		100	+10.0***
3r		10	+13.8
	20	+12.5	
	50	+10.7	
		100	+10.0***
	4	10	+22.8
20		+21.8	
50		+20.4	
		100	+19.4
WALL		5	+22.8
		20	+21.8
		50	+20.4
		100	+19.4
			-23.7

REFERENCE FIGURES BELOW:

DESIGN ALL WINDOWS AND DOORS AS
IMPACT RESISTANCE FOR PRESSURE ABOVE

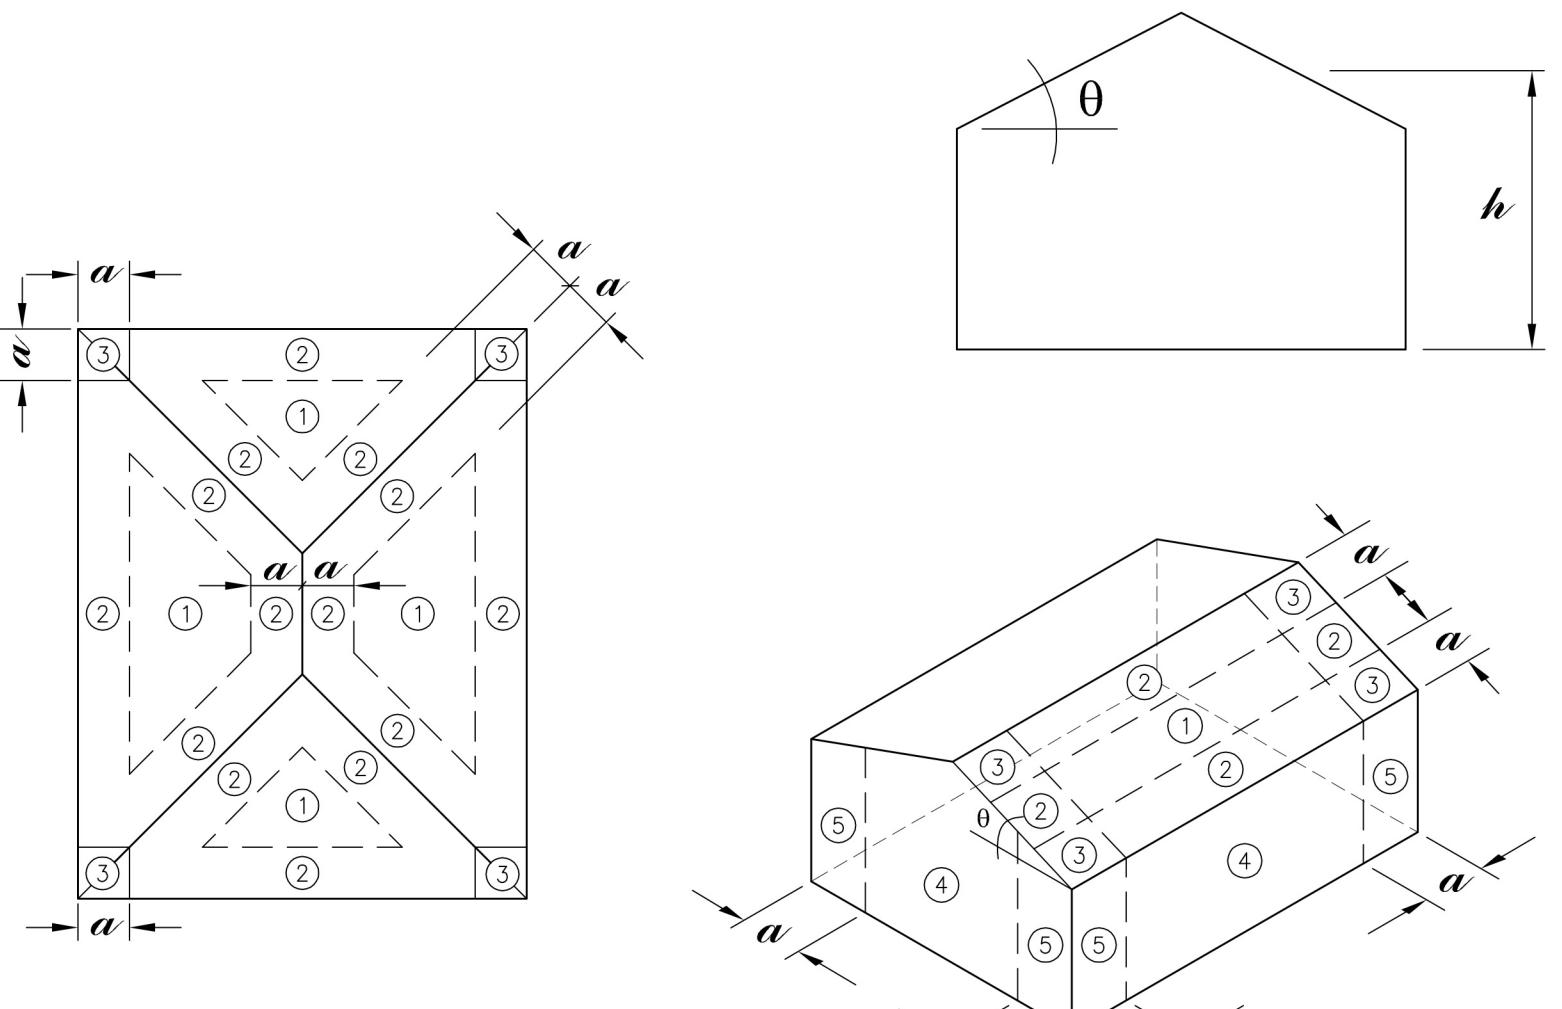

LUMBER:

- UNLESS NOTED OTHERWISE, ALL LUMBER SHALL BE #2 KD SOUTHERN YELLOW PINE OR #2 SPRUCE-PINE-FIR WITH A MAXIMUM MOISTURE CONTENT OF 19 PERCENT.
- ALL LUMBER IN CONTACT WITH CONCRETE OR MASONRY SHALL BE PRESSURE TREATED.
- ALL LUMBER EXPOSED TO EXTERIOR ENVIRONMENT SHALL BE PRESSURE TREATED.
- EXTERIOR LOAD-BEARING STUD FRAMING SHALL BE NO. 2 SYP OR SPF; $F_b=1000$ PSI, $E=1400$ KSI.
- INTERIOR LOAD-BEARING STUD FRAMING SHALL BE NO. 2 SYP OR SPF, SIZE SHOWN ON PLANS: $F_b=1000$ PSI, $E=1400$ KSI.
- ROOF DECK SHALL BE MINIMUM 5/8" EXTERIOR GRADE PLYWOOD ATTACHED WITH 8d RING SHANK NAILS AS SHOWN ON ATTACHMENT DETAILS.
- INSTALL SIMPSON PSC CLIPS OR USP MODEL PC SHEATHING CLIPS AT ALL UNSUPPORTED EDGES OF ROOF DECK (ONE PER SPAN).
- UNLESS NOTED OTHERWISE, ALL EXTERIOR WALL SHEATHING TO BE 1/2" PLYWOOD ATTACHED DIRECTLY TO WALL FRAMING MEMBERS. BLOCK ALL PANEL EDGES AND NAIL WITH 8d COMMON NAILS @ 4" o.c. AT ALL PANEL EDGES, BLOCKING, AND TOP & BOTTOM PLATES WITH FIELD NAILING @ 6" o.c.
- ALL PLYWOOD PANELS SHALL BE INSTALLED IN ACCORDANCE WITH APA RECOMMENDATIONS AND RELATED SPECIFICATIONS. ORIENTED STRAND BOARD "OSB" MAY BE SUBSTITUTED FOR PLYWOOD WHERE APPROVED BY THE ARCHITECT/ENGINEER AND PROVIDED THE PANEL CONFORM TO THE APPROPRIATE APA RAINS FOR THE INTENDED APPLICATION.
- PROVIDE A MINIMUM OF 2 STUDS NAILED TOGETHER BENEATH ALL HEADERS UNLESS NOTED OTHERWISE. USE AT LEAST 2-2x10 HEADER FOR ALL OPENINGS UP TO 4'-0" WIDE IN BEARING WALLS. USE AT LEAST 3-2x10 HEADER FOR ALL OPENINGS UP TO 8'-0" WIDE IN BEARING WALLS.
- ALL MULTIPLE PIECE WOOD BEAMS SHALL BE CONNECTED TOGETHER WITH MINIMUM TWO ROWS OF 16d NAILS @ 12" o.c. (U.N.O.).
- AS A MINIMUM, ANCHOR AND NAIL FRAMING SHALL COMPLY WITH "TABLE R602.3.1(1) - FASTENING SCHEDULE" OF THE 2018 INTERNATIONAL RESIDENTIAL CODE.
- ALL BOLTS, NAILS, JOIST HANGERS, CLIPS, STRAPS, ETC THAT ARE IN CONTACT WITH PRESSURE TREATED MATERIAL SHALL BE HOT-DIPPED GALVANIZED OR STAINLESS STEEL.
- ALL CONNECTORS AND HARDWARE SHALL BE INSTALLED IN STRICT COMPLIANCE WITH THE MANUFACTURER RECOMMENDATIONS, SIZE, QUANTITY, AND LOCATION OF NAILS AND FASTENERS SHALL CONFORM TO THE MANUFACTURERS PUBLISHED LITERATURE.
- LVL BEAM SHALL BE 2950 $F_b=2.0$ AS MANUFACTURED.
- TREATED GLULAMS TO BE MINIMUM 2400 PSI F_b & 1.8E MINIMUM
- TREATED PSL BEAMS TO BE MINIMUM 1885 PSI F_b , 1.49E, & SERVICE LEVEL 2 TREATMENT MINIMUM.
- ALL EXTERIOR LVL'S TO BE WRAPPED & PROTECTED FROM THE WEATHER OR USE TREATED GLULAMS OR PSL'S.
- ROOF SHINGLES TO BE HIGH WIND CLASS "H" WITH A MINIMUM OF 6 FASTENERS EACH.

FOUNDATION:

- NO SOILS REPORT HAS BEEN PREPARED FOR THIS PROJECT, UNLESS NOTED OTHERWISE. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING ADEQUATE SOIL SUPPORT FOR THE FOUNDATION DESIGN, AND SHALL REPORT UNEXPECTED CONDITIONS TO THE DESIGNER.
- ALL FOOTINGS, OR PORTIONS THEREOF, BELOW GRADE MAY BE EARTH FORMED BY NEAT EXCAVATIONS.
- FOOTINGS TO BE CENTERED ON WALLS OR COLUMN UNLESS NOTED OTHERWISE.
- ALLOWABLE SOIL BEARING = 1500 PSF
- COMPACT ALL SOILS BELOW SLAB AND FOOTINGS 95% STANDARD PROCTOR DENSITY.
- ALL SOIL FILL TO BE PLACED IN 8" LIFTS AND COMPAKTED TO 95% STANDARD PROCTOR DENSITY.

WOOD ROOF TRUSSES & SPECIALTY WOOD PRODUCTS:

- WOOD TRUSSES AS INDICATED ON THE PLANS SHALL BE DESIGNED TO MEET THE SPANS AND DESIGN INDICATED ON THESE DRAWINGS. STORAGE, ERECTION AND BRACING SHALL BE IN ACCORDANCE WITH THE MANUFACTURERS PUBLISHED DRAWINGS AND INSTALLATION RECOMMENDATIONS. MANUFACTURER SHALL PROVIDE ALL SPECIALTY ITEMS AS NECESSARY FOR A COMPLETE INSTALLATION OF THE TRUSSES.
- ROOF TRUSSES TO BE DESIGNED FOR LIVE LOAD DEFLECTION $L/240$.
- SHOP DRAWINGS SHALL BE PREPARED FOR THE TRUSS ROOF SYSTEM. SHOP DRAWINGS SHALL INCLUDE FRAMING LAYOUT, INSTALLATION DETAILS, AND RELATED REQUIREMENTS. DRAWINGS SHALL BE SUBMITTED FOR REVIEW. MATERIAL SHOULD NOT BE FABRICATED UNTIL SUBMITTED ITEMS HAVE BEEN REVIEWED AND APPROVED BY THE ARCHITECT/ENGINEER.
- ALTERNATE PRODUCTS BY OTHER MANUFACTURERS WITH COMPARABLE DESIGN PROPERTIES MAY BE SUBMITTED FOR REVIEW BY THE ENGINEER. ALTERNATE PRODUCTS MUST BE APPROVED IN WRITING BY THE ENGINEER/ ARCHITECT PRIOR TO MAKING ANY SUBSTITUTIONS.

MASONRY:

- HOLLOW CONCRETE MASONRY UNITS SHALL CONFORM TO ASTM C-90 LIGHTWEIGHT, TYPE N-1 WITH A MINIMUM COMPRESSIVE STRENGTH $f'm = 1500$ PSI.
- ALL MORTAR FOR USE IN MASONRY SHALL CONFORM TO ASTM C-270, TYPE M OR S. GROUT USED IN MASONRY SHALL BE MINIMUM 2500 PSI AND CONFORM TO ASTM C-476. MINIMUM 8 SACK MIX.
- REINFORCING BARS TO BE GRADE 60 AND MEET ASTM A-615.
- GROUT FILL ALL CELLS BELOW GRADE.
- LAY ALL MASONRY IN A RUNNING BOND PATTERN.
- PROVIDE #9 TRUSS TYPE JOINT REINFORCEMENT AT 16" o.c. FOR TYPICAL HORIZONTAL REINFORCING.
- PROVIDE #9 TRUSS TYPE JOINT REINFORCEMENT AT 8" o.c. FOR TYPICAL HORIZONTAL REINFORCING AT PARAPET WALLS.
- PROVIDE A MINIMUM OF 1" GROUT BETWEEN MAIN REINFORCING AND MASONRY UNITS.

CONCRETE WORK:

- CONCRETE (NORMAL WEIGHT) COMPRESSIVE STRENGTH AT 28 DAYS SHALL BE REF. SCHEDULE BELOW

LOCATION	COMPRESSION STRENGTH
FOUNDATION	3000 psi
SLAB ON GRADE	3500 psi
ELEVATED SLAB	4000 psi
WALLS	4000 psi

- ALL REINFORCING SHALL MEET ASTM A615, GRADE 60. ALL WELDED WIRE FABRIC (WWF) SHALL MEET ASTM A185.

- CONCRETE COVERAGE OF REINFORCEMENT SHALL BE:
FOOTINGS 3" BOTTOM AND SIDES
WALLS $\frac{1}{2}$ "
SLABS $\frac{3}{4}$ "
PEDESTALS $\frac{1}{2}$ " CLEAR OF TIES


- ALL CONCRETE CONSTRUCTION SHALL CONFORM TO THE CURRENT "ACI MANUAL OF CONCRETE PLACEMENT".
- PORTLAND CEMENT SHALL CONFORM TO ASTM C 150, TYPE I OR II.
- ALL AGGREGATE FOR NORMAL WEIGHT CONCRETE SHALL MEET ASTM C 33.
- ALL REINFORCING SHALL BE DETAILED, FABRICATED AND PLACED PER CRSI AND ACI STANDARDS, INCLUDING CONCRETE COVER AND BAR SUPPORTS. LAP BARS AT ALL SPLICES, INCLUDING CORNER BARS AND DOWELS, IN ACCORDANCE WITH SPLICE SCHEDULE OR IN LIEU THEREOF 40 BAR DIAMETERS. LAP WWF 6" OR ONE FULL MESH, WHICHEVER IS GREATER.

WIND BORNE DEBRIS PROTECTION FOR EXTERIOR WINDOWS IRC 2021:

- WINDOWS TO BE DESIGNED FOR A DESIGN WIND PRESSURE OF ±30 PSF, REFERENCE CHART.
- *THE CONTRACTOR SHALL PROVIDE PLYWOOD PROTECTION FOR THE EXTERIOR WINDOWS IN ACCORDANCE WITH R613.4 WIND BORNE DEBRIS PROTECTION IN THE 2021 INTERNATIONAL RESIDENTIAL CODE.
- THE CONTRACTOR SHALL PROVIDE WIND BORNE DEBRIS FASTENERS FOR THE WOOD STRUCTURAL PANELS IN ACCORDANCE WITH TABLE R3C1.2.1.2 IN THE 2018 INTERNATIONAL RESIDENTIAL CODE.
- THE CONTRACTOR SHALL PROVIDE WOOD STRUCTURAL PANELS WITH A MINIMUM THICKNESS OF $\frac{1}{2}$ " AND A MAXIMUM SPAN OF 8 FEET IN ACCORDANCE WITH R301.2.1 INTERNAL PRESSURES IN THE 2021 INTERNATIONAL RESIDENTIAL CODE.
- *AN OPTION TO THE PLYWOOD PROTECTION, THE CONTRACTOR MAY USE IMPACT RESISTANCE WINDOWS.


STRUCTURAL DRAWING INDEX:

S0.0 - STRUCTURAL NOTES
S1.0 - FOUNDATION PLAN
S2.0 - FIRST FLOOR FRAMING PLAN
S3.0 - CEILING FRAMING PLAN
S4.0 - ROOF FRAMING PLAN
S5.0 - SECTIONS AND DETAILS
S6.0 - SECTIONS AND DETAILS
S7.0 - SECTIONS AND DETAILS

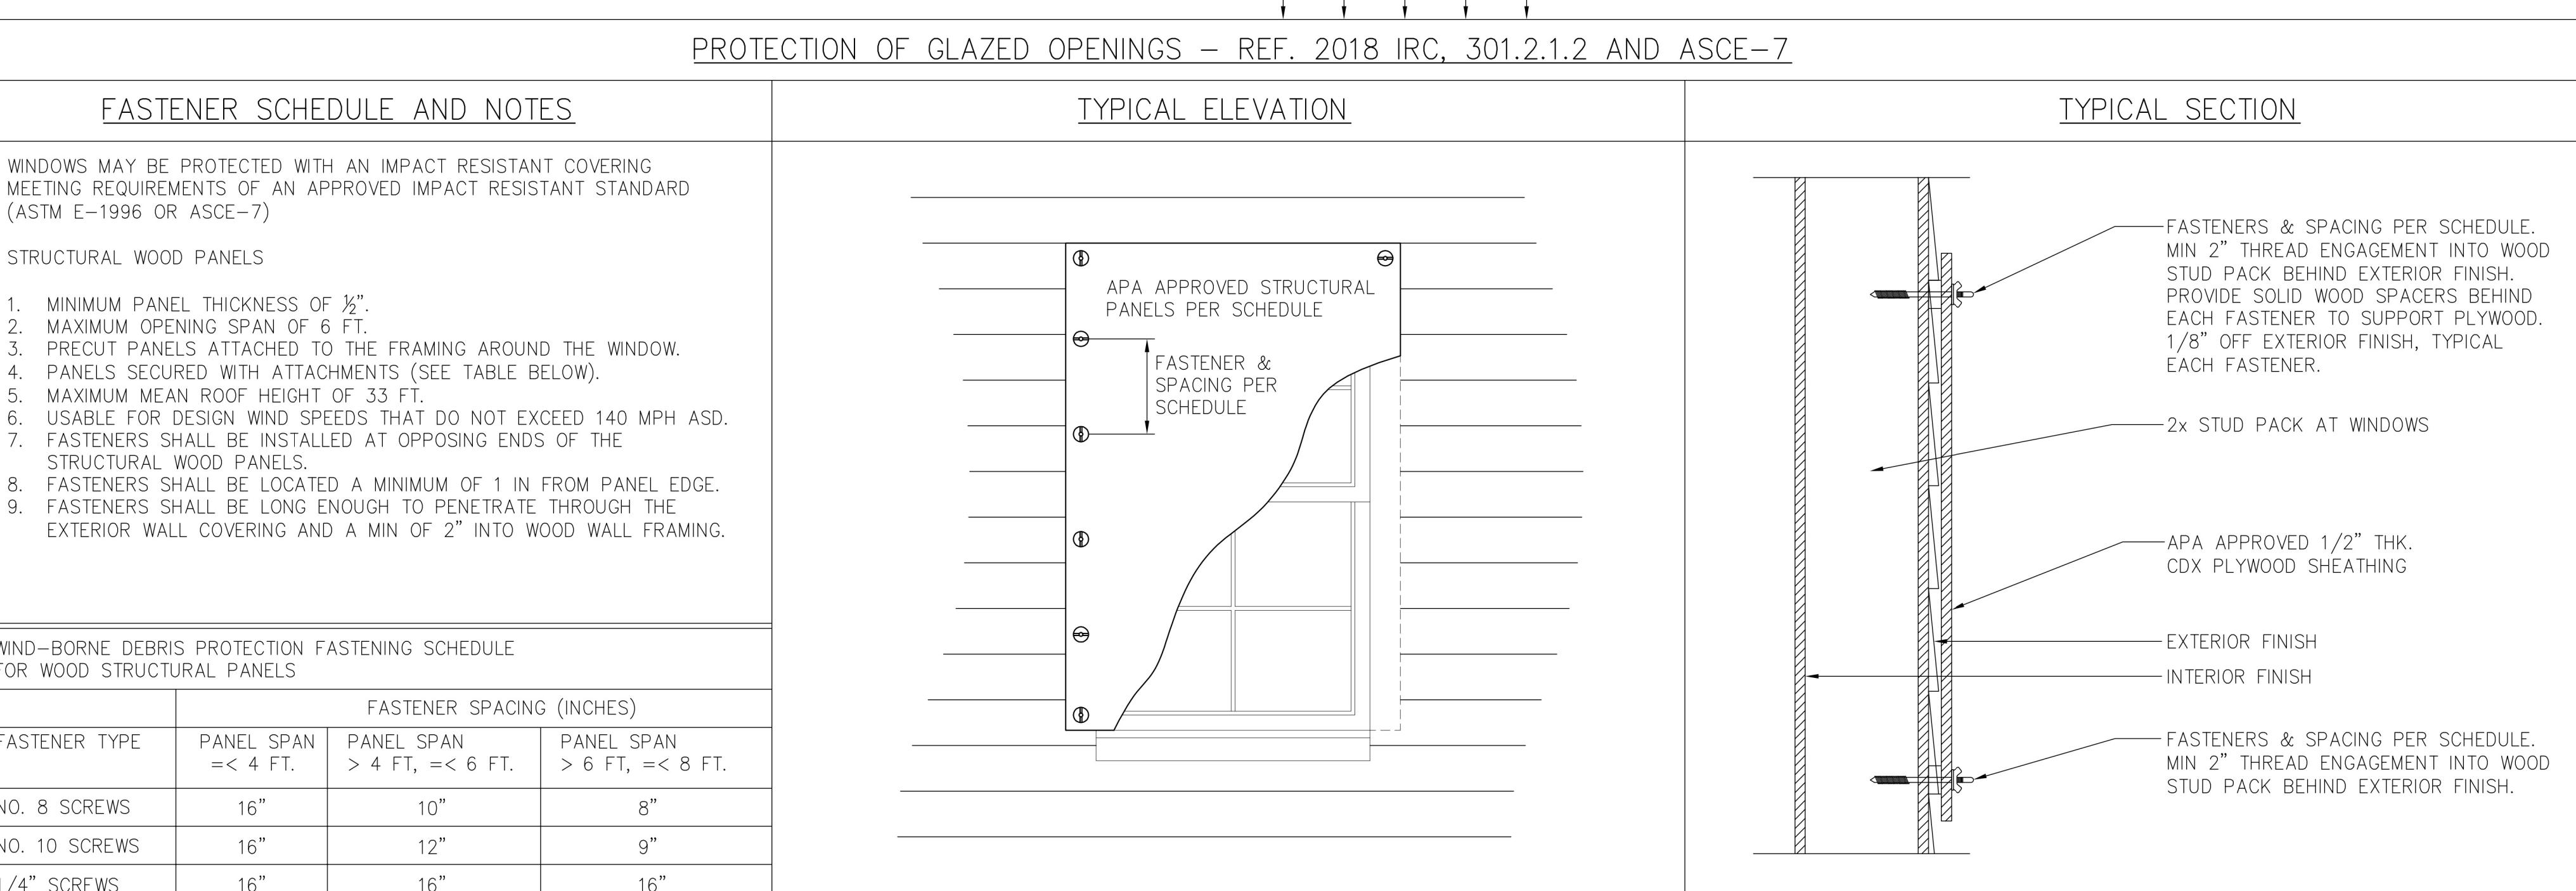

ALABAMA
LICENSE NO. 24034
PROFESSIONAL
ENGINEER
BIRMINGHAM, ALABAMA
FOR PERMIT
REVISIONS:
DRAWN BY: MAD
DESIGNED BY: RSB
DATE: 28 OCT 2025 SHEET
25342 S0.0

FOUNDATION PLAN
DOGWOOD RESIDENCE
(100 DEWITT AVENUE
SATSUMA, AL, 36572)

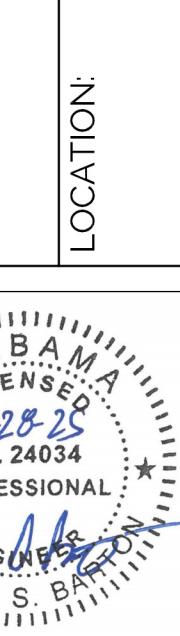

FOR PERMIT

REVISIONS:


DRAWN BY: MAD

DESIGNED BY: RSB

DATE: 28 OCT 2025

SHEET
S1.0

25342

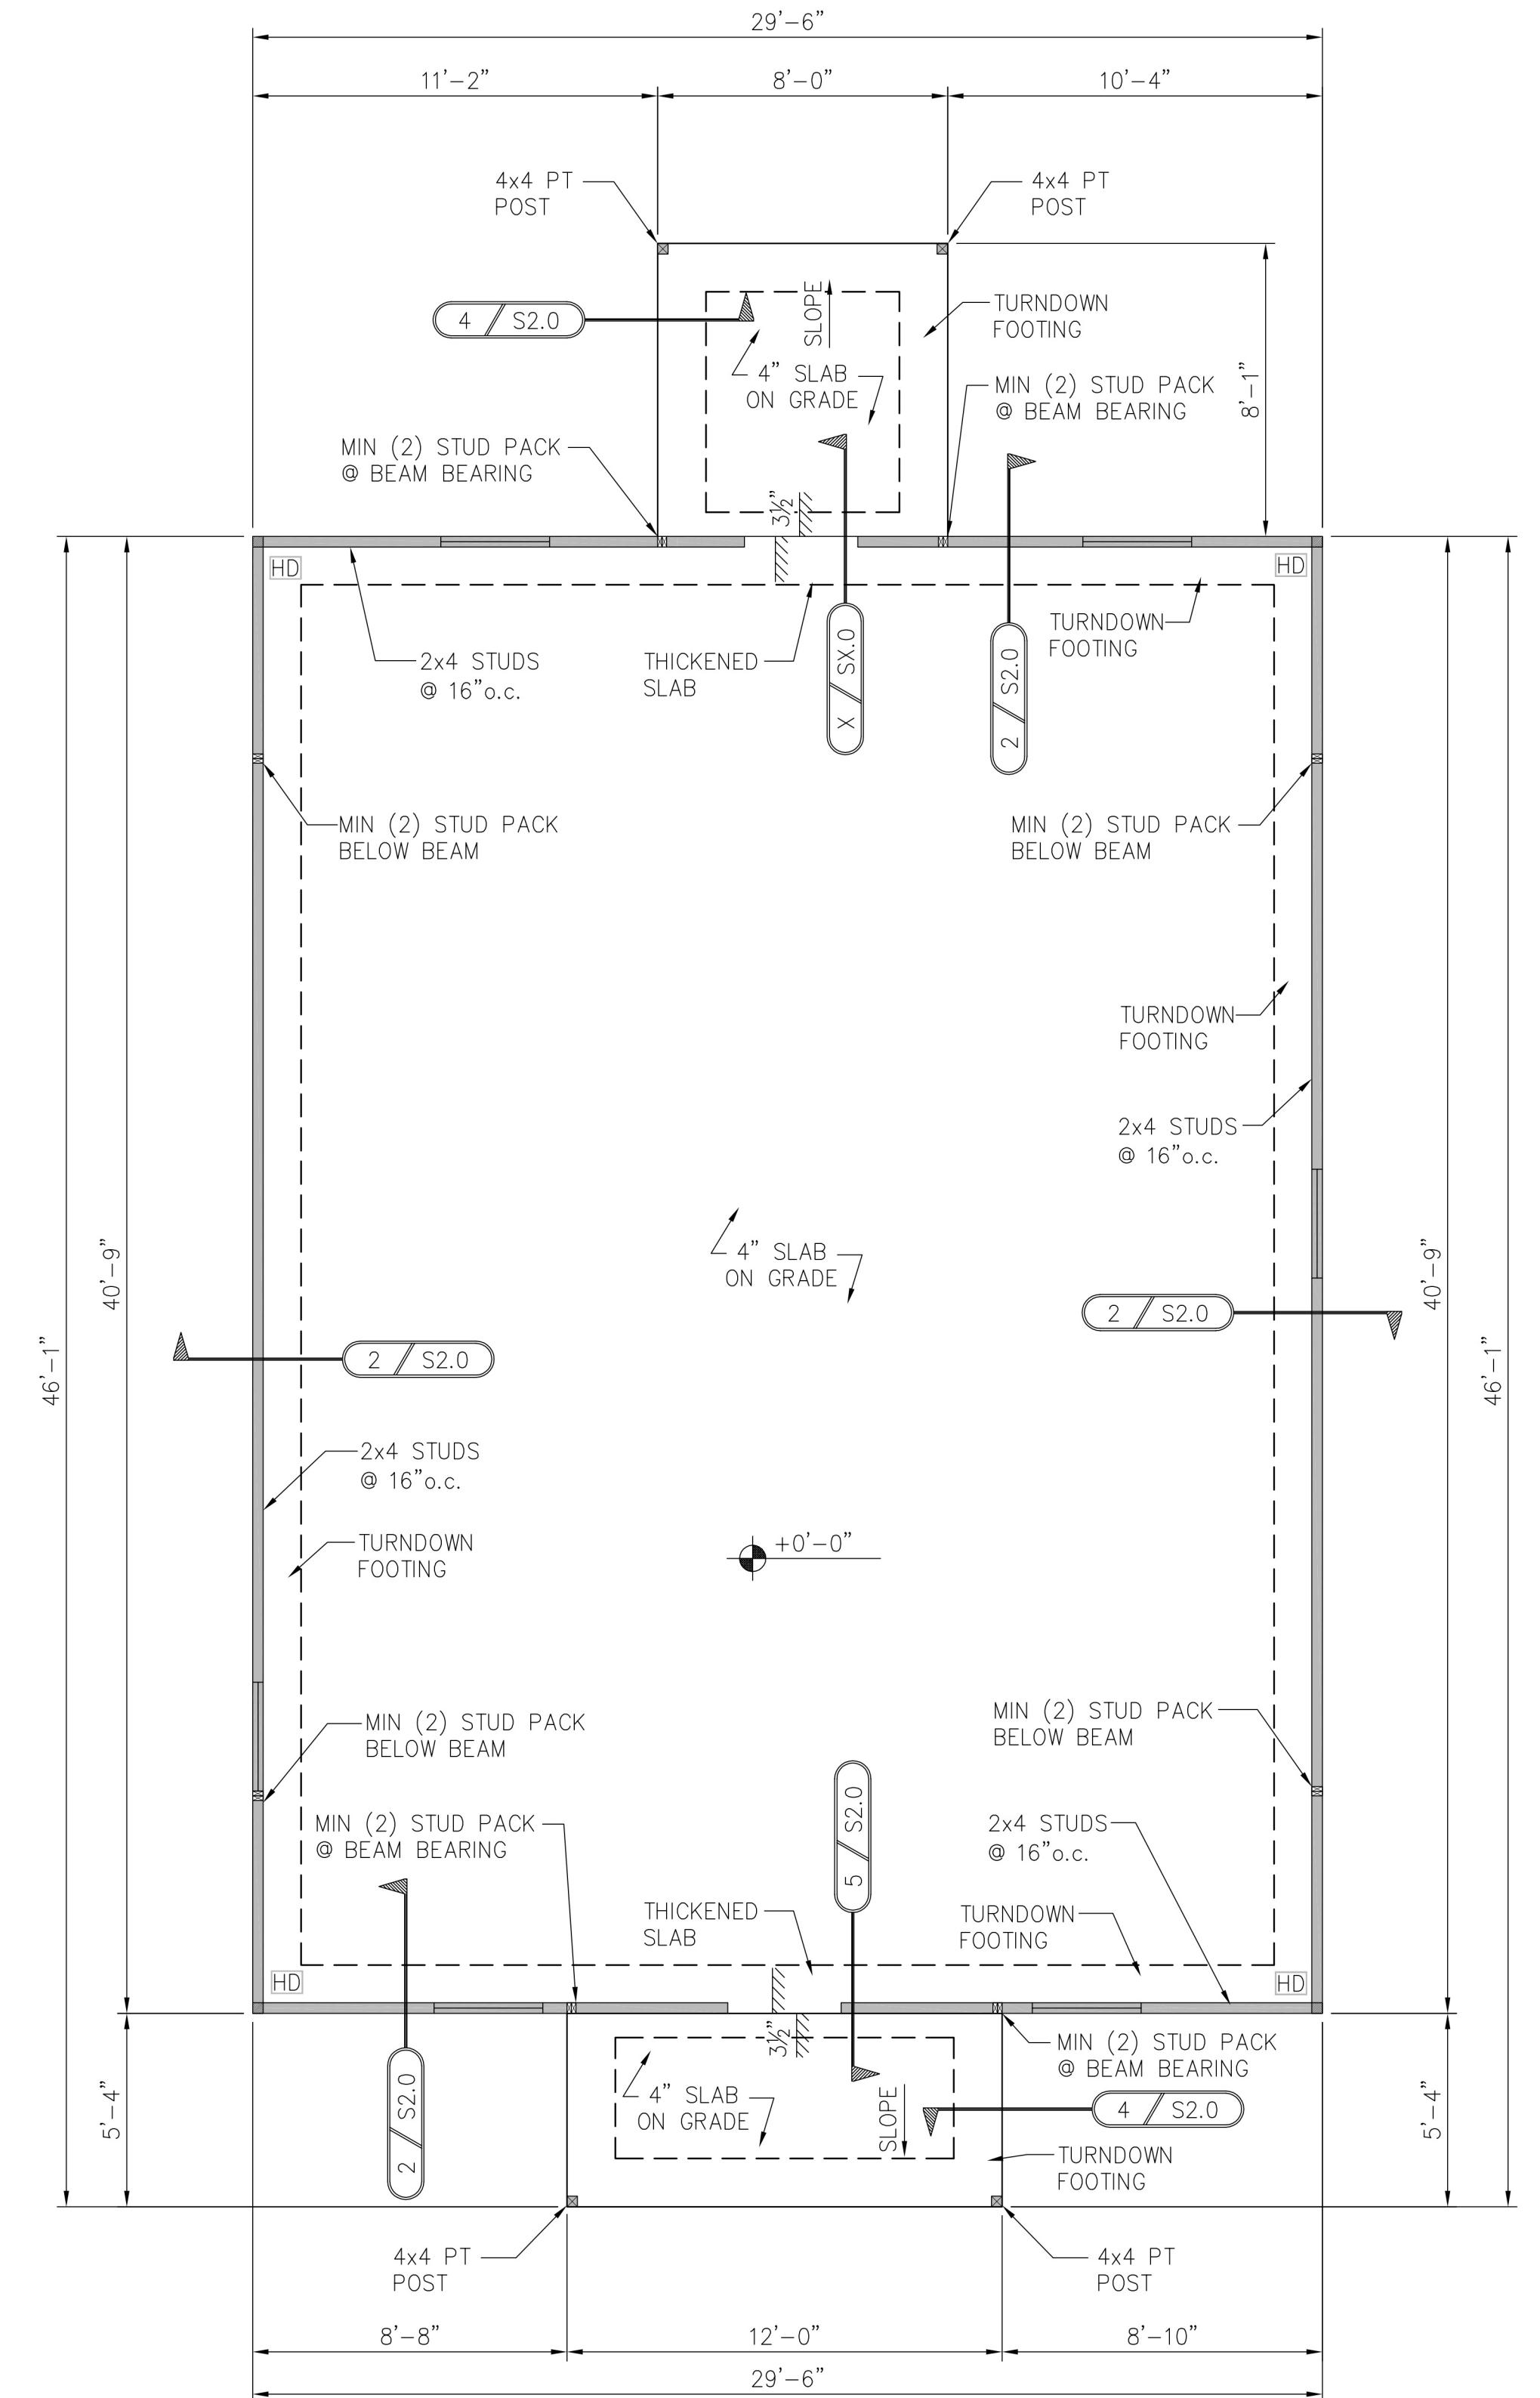

FOUNDATION PLAN

SCALE: 1/4"=1'-0"
FINISH FLOOR = +0'-0" U.N.O.


NOTES:

- VERIFY ALL DIMENSIONS & FLOOR ELEVATIONS WITH ARCHITECTURAL PRIOR TO STARTING CONSTRUCTION.
- ALL DIMENSIONS ARE TO OUTSIDE FACE OF STUDS OR FACE OF SLAB U.N.O.

SLAB-ON-GRADE CONSTRUCTION

4" CONCRETE SLAB REINFORCED WITH 6x6-W1.4xW1.4
WWF FLAT SHEETS PLACED ON BRICKS/CHAIRS. PLACE
OVER VAPOR BARRIER AND COMPACTED STRUCTURAL
FILL MATERIAL. FILL TO BE PLACED IN 8" LIFTS AND
COMPACTED TO 95% STANDARD PROCTOR DENSITY.

NOTE:
ALL EXPOSED TIES AND STRAPS TO
BE STAINLESS STEEL OR TRIPLE ZINC

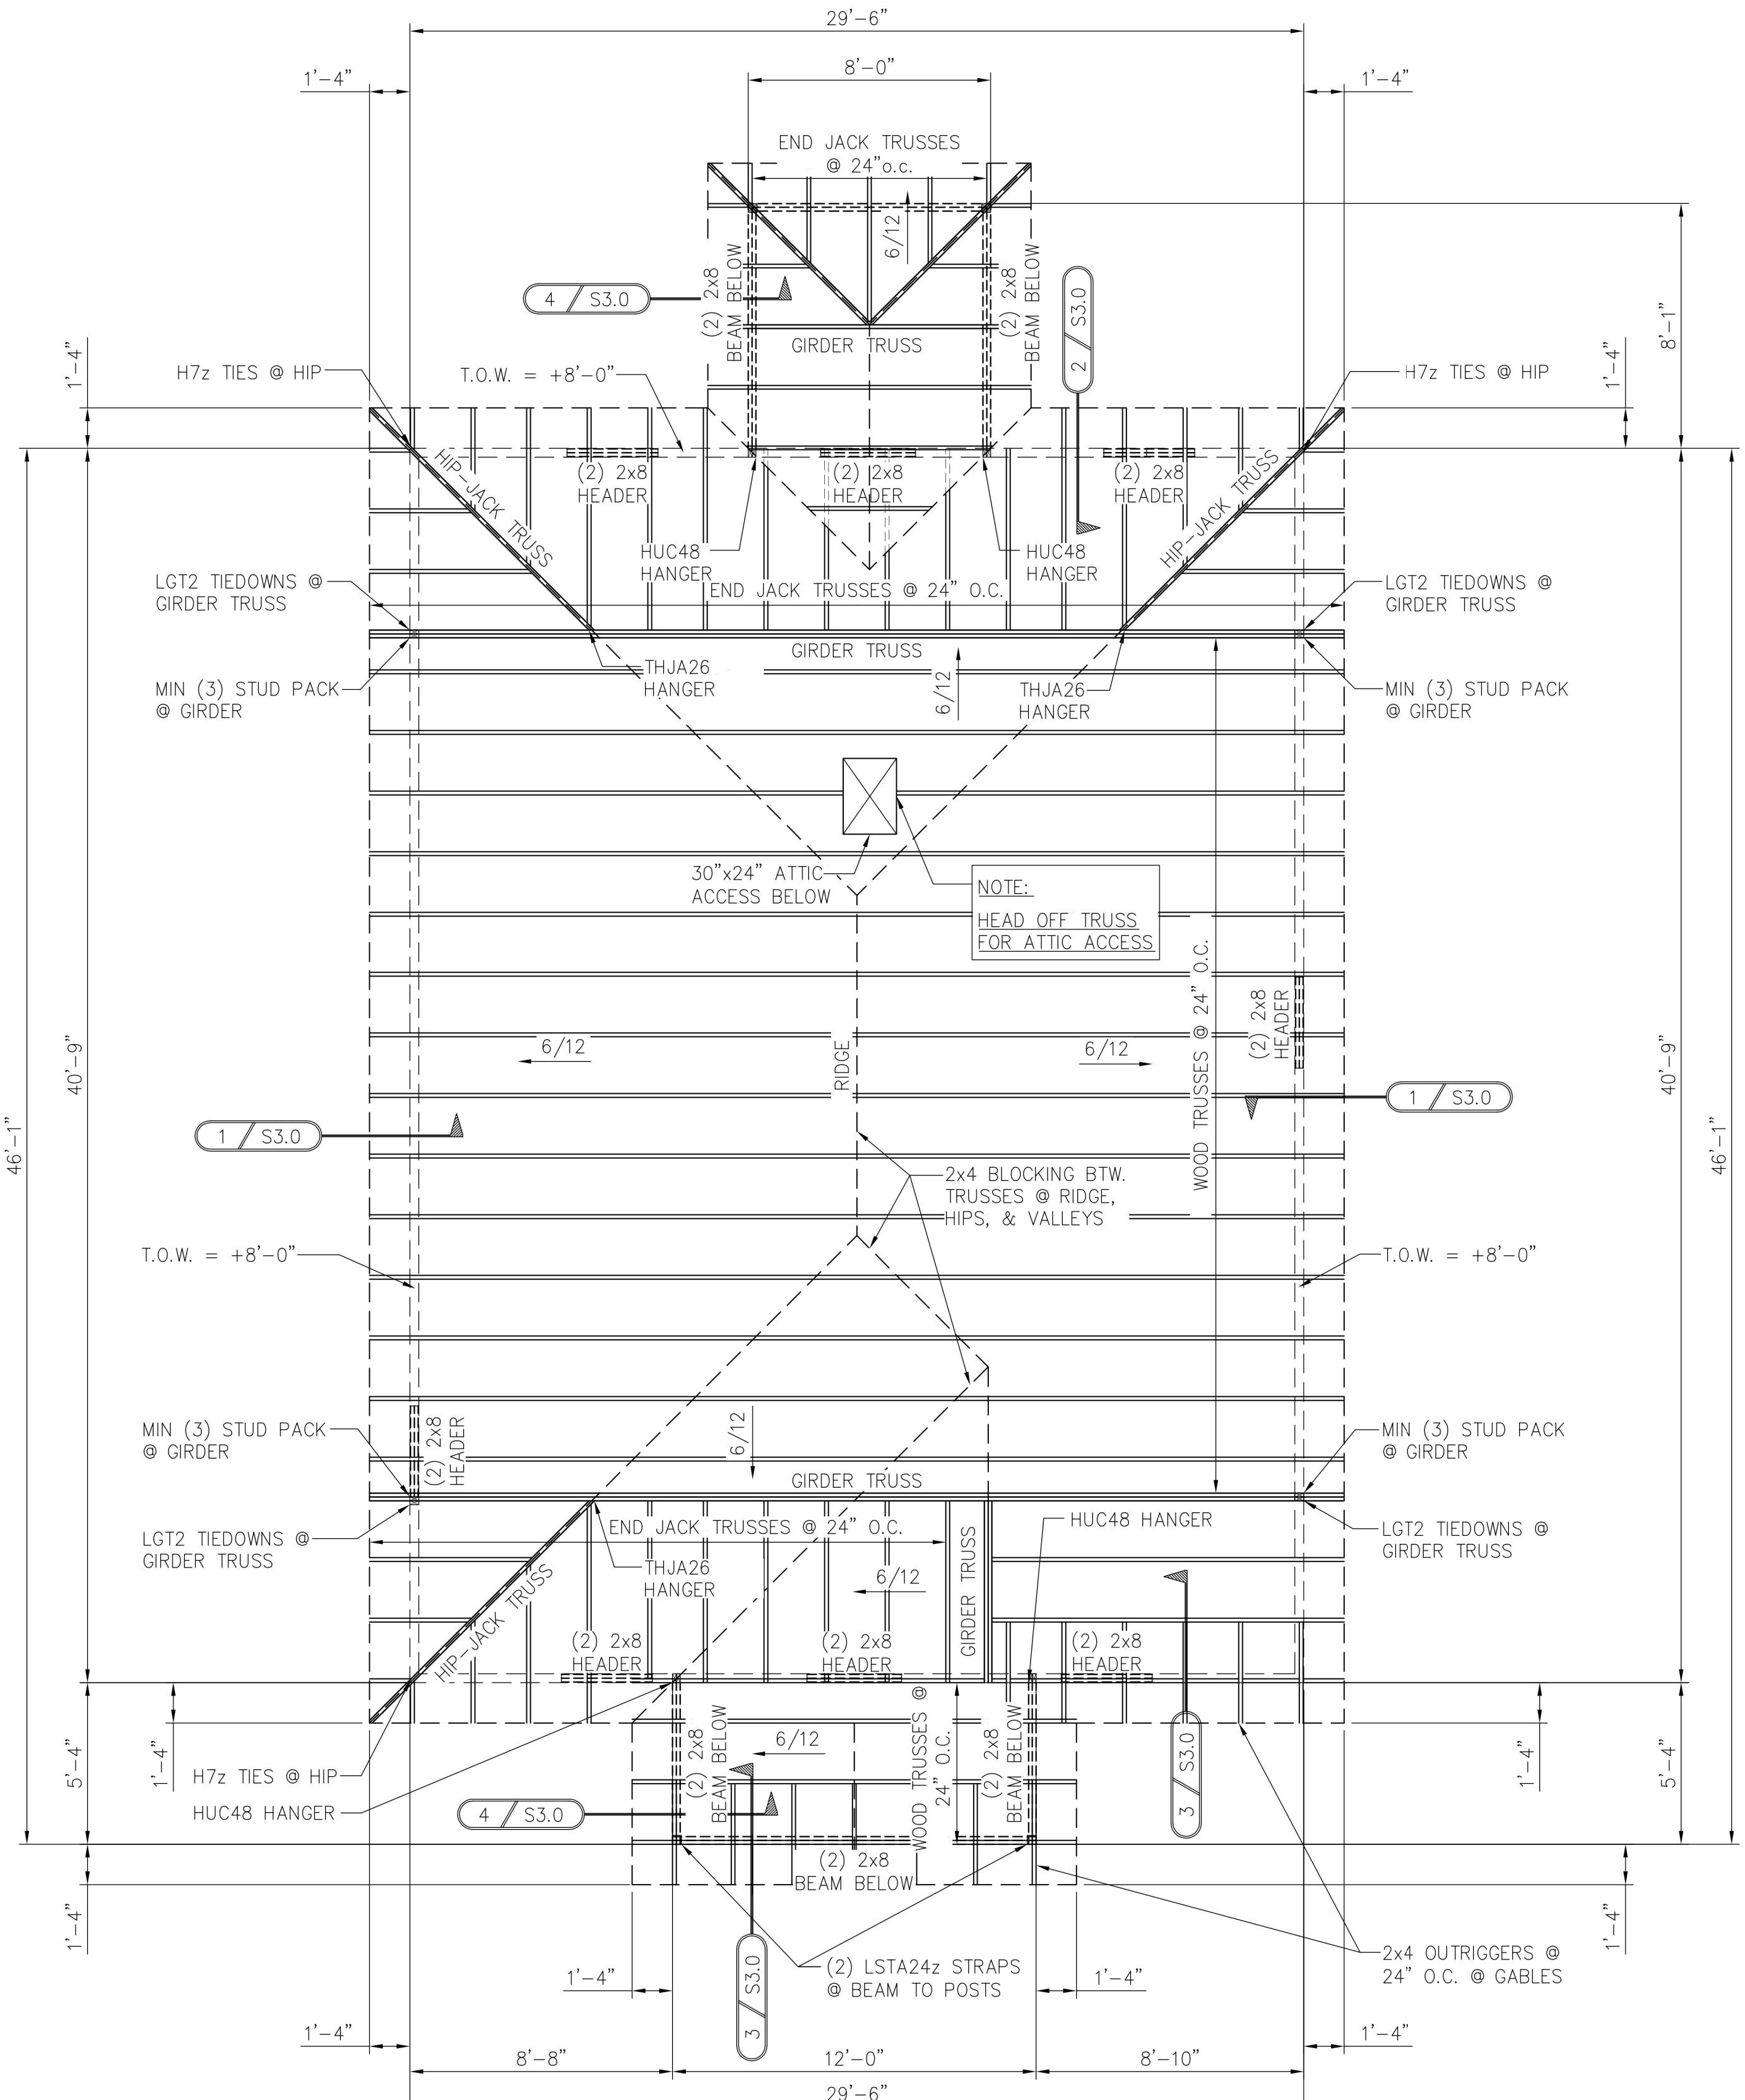

ROOF FRAMING PLAN

SCALE: 1/4"=1'-0"
TOP OF WALL = +8'-0" U.N.O. = TRUSS BEARING

TYPICAL ROOF DECK:


5/8" EXT. GRADE PLYWOOD. ATTACH W/ 8d RING
SHANK NAILS AS SHOWN ON ROOF FRAMING DETAIL.

LEGEND

	FINISHED FLOOR ELEVATION
	HDU4-SDS2.5 HOLDOWN BY SIMPSON
	STEP IN SLAB ELEVATION
	TOP OF WALL
	TOP OF BEAM
	SCALE: 1/4" = 1'-0"
4' 2' 0' 2' 4' 8'	

SECTIONS AND DETAILS
DOGWOOD RESIDENCE
(100 DEWITT AVENUE
SATSUMA, AL, 36572)

LOCATION:

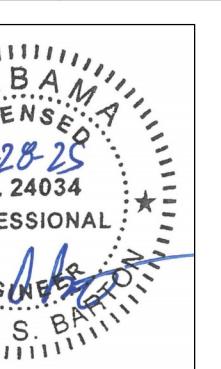

FOR PERMIT

REVISIONS:

DRAWN BY: MAD








DESIGNED BY: RSB

DATE: 28 OCT 2025

SHEET

S2.0


25342

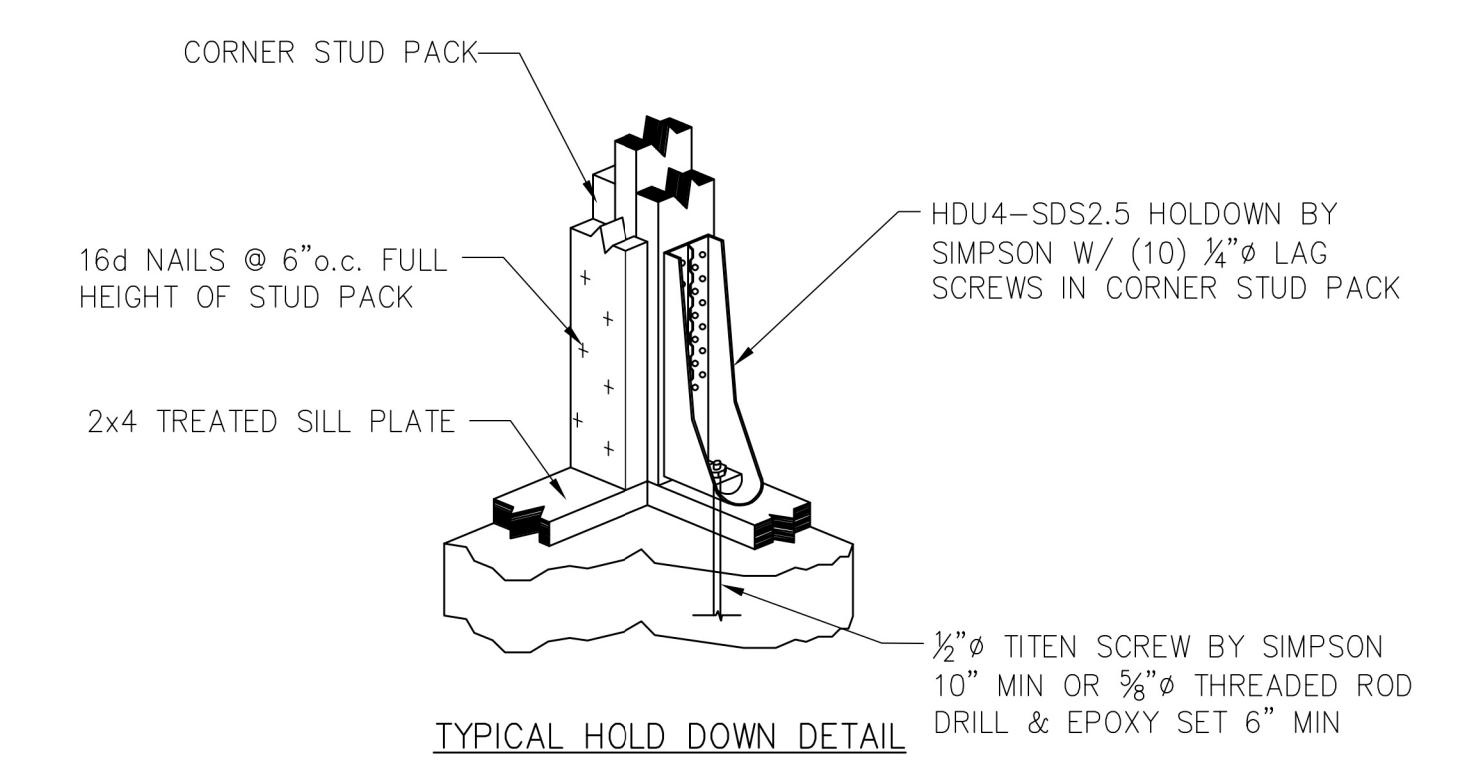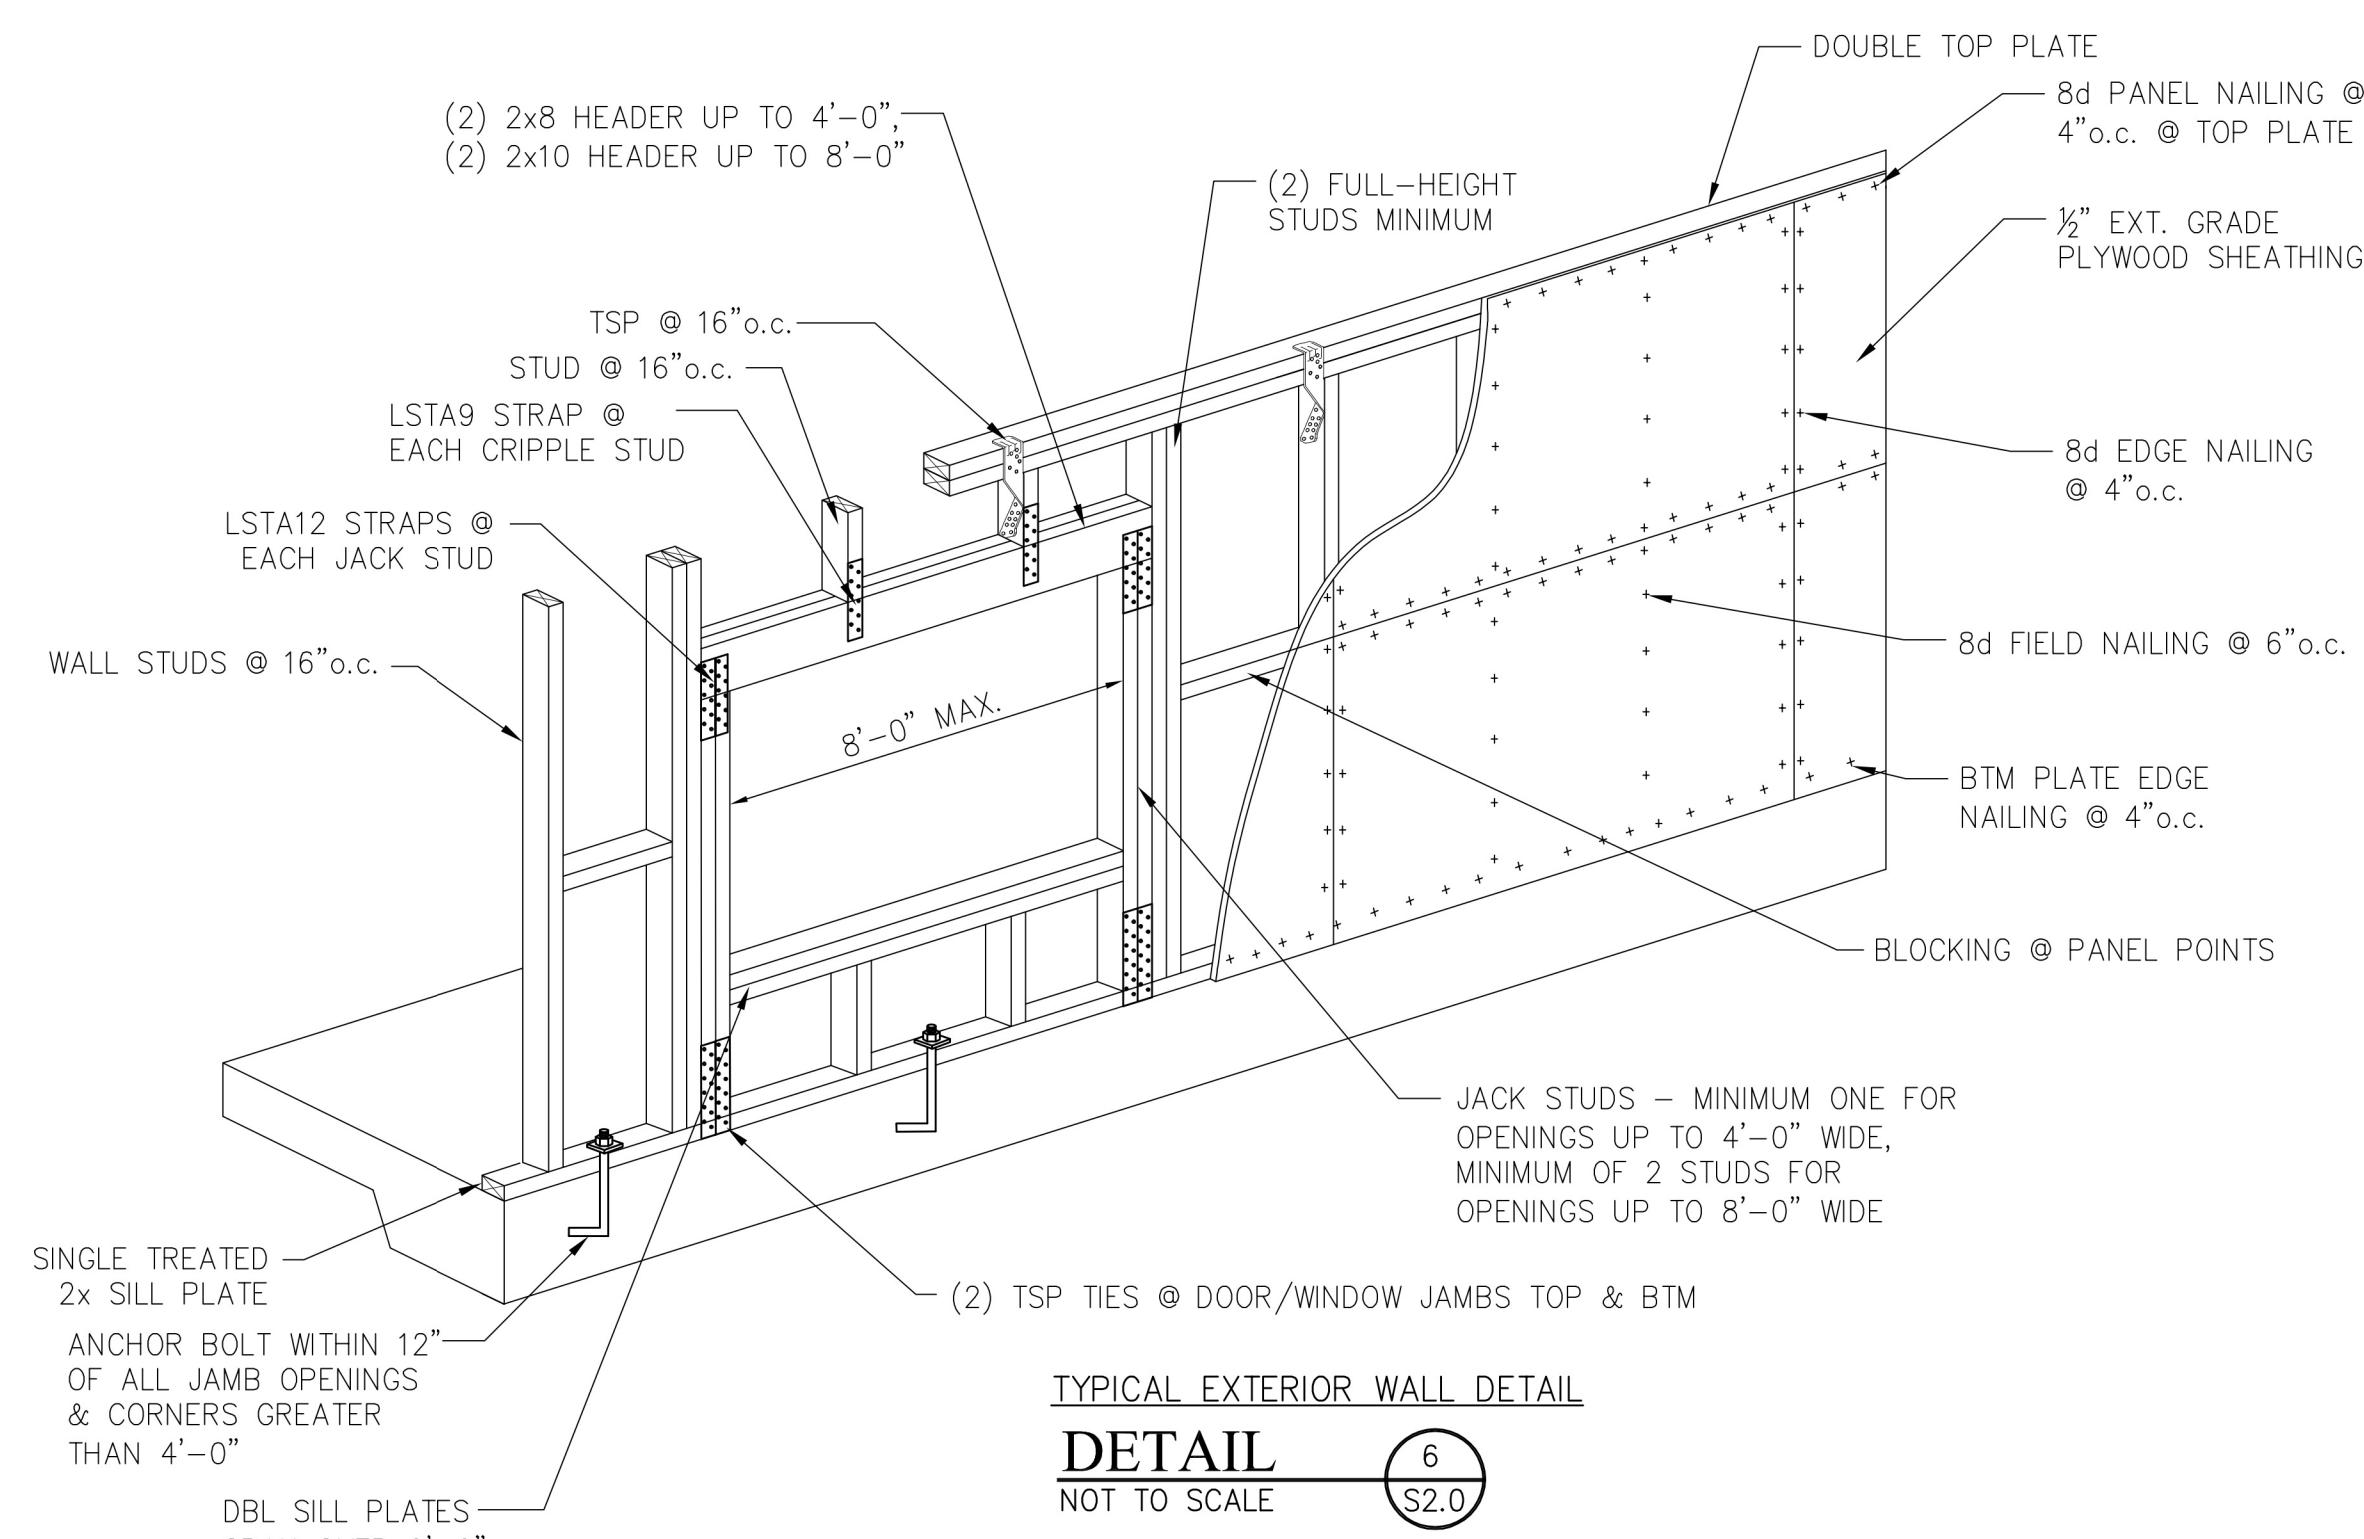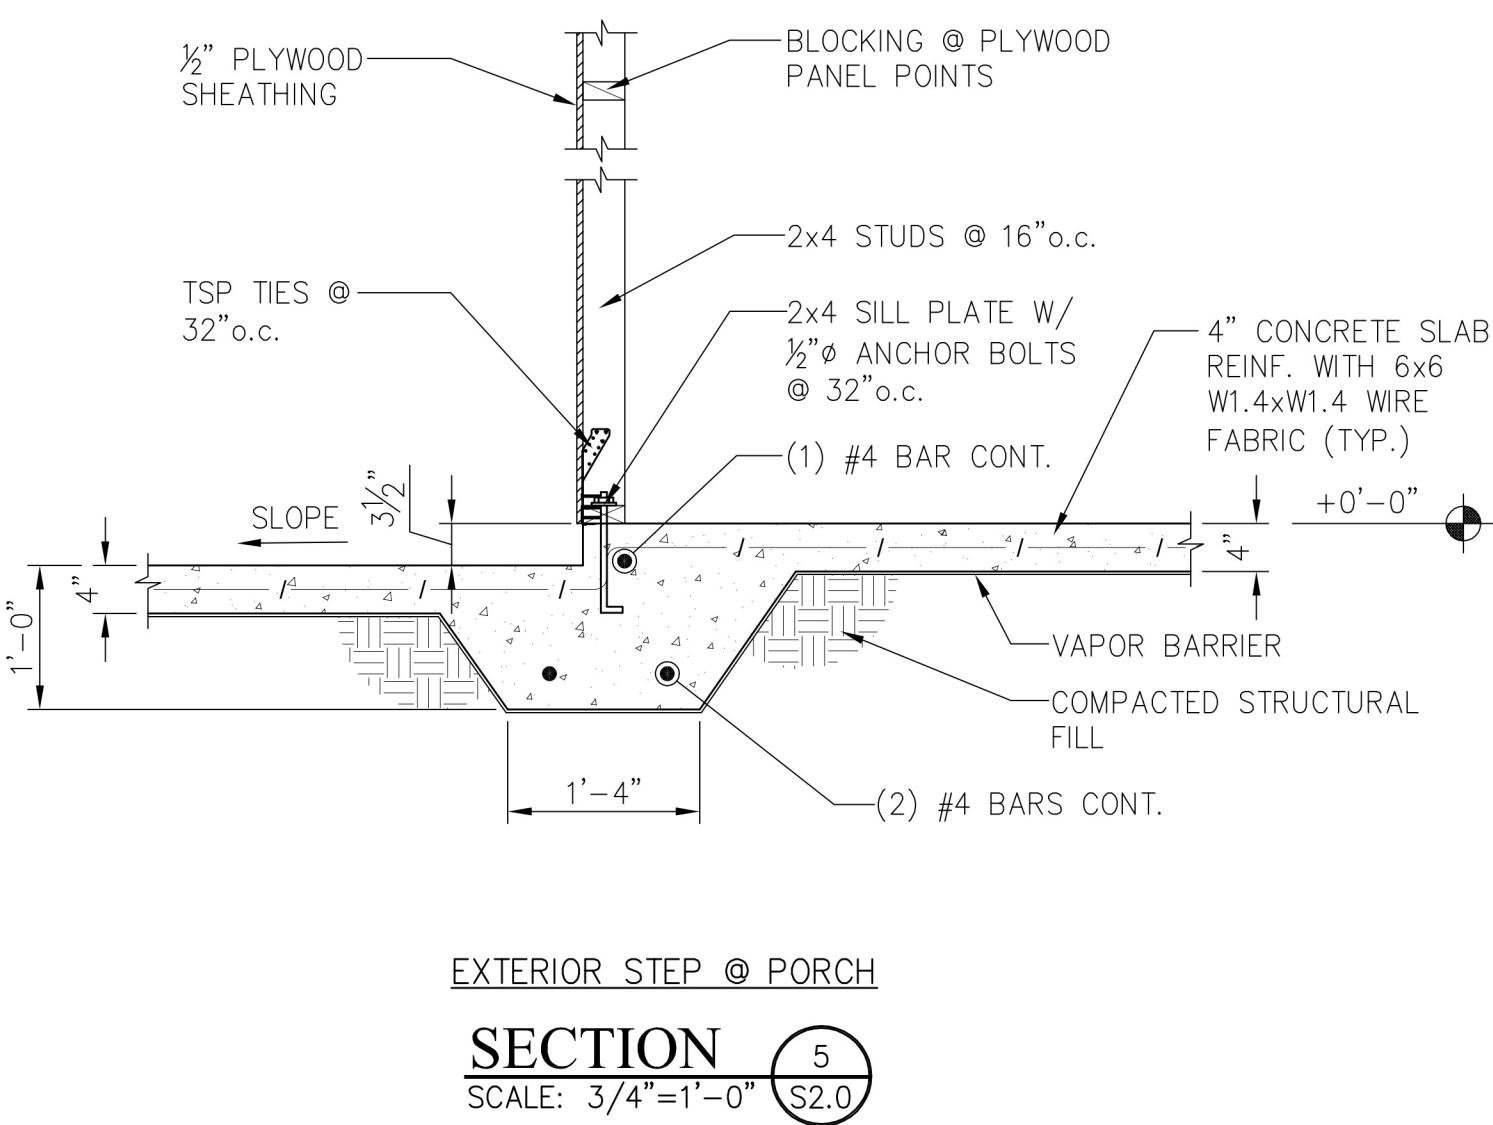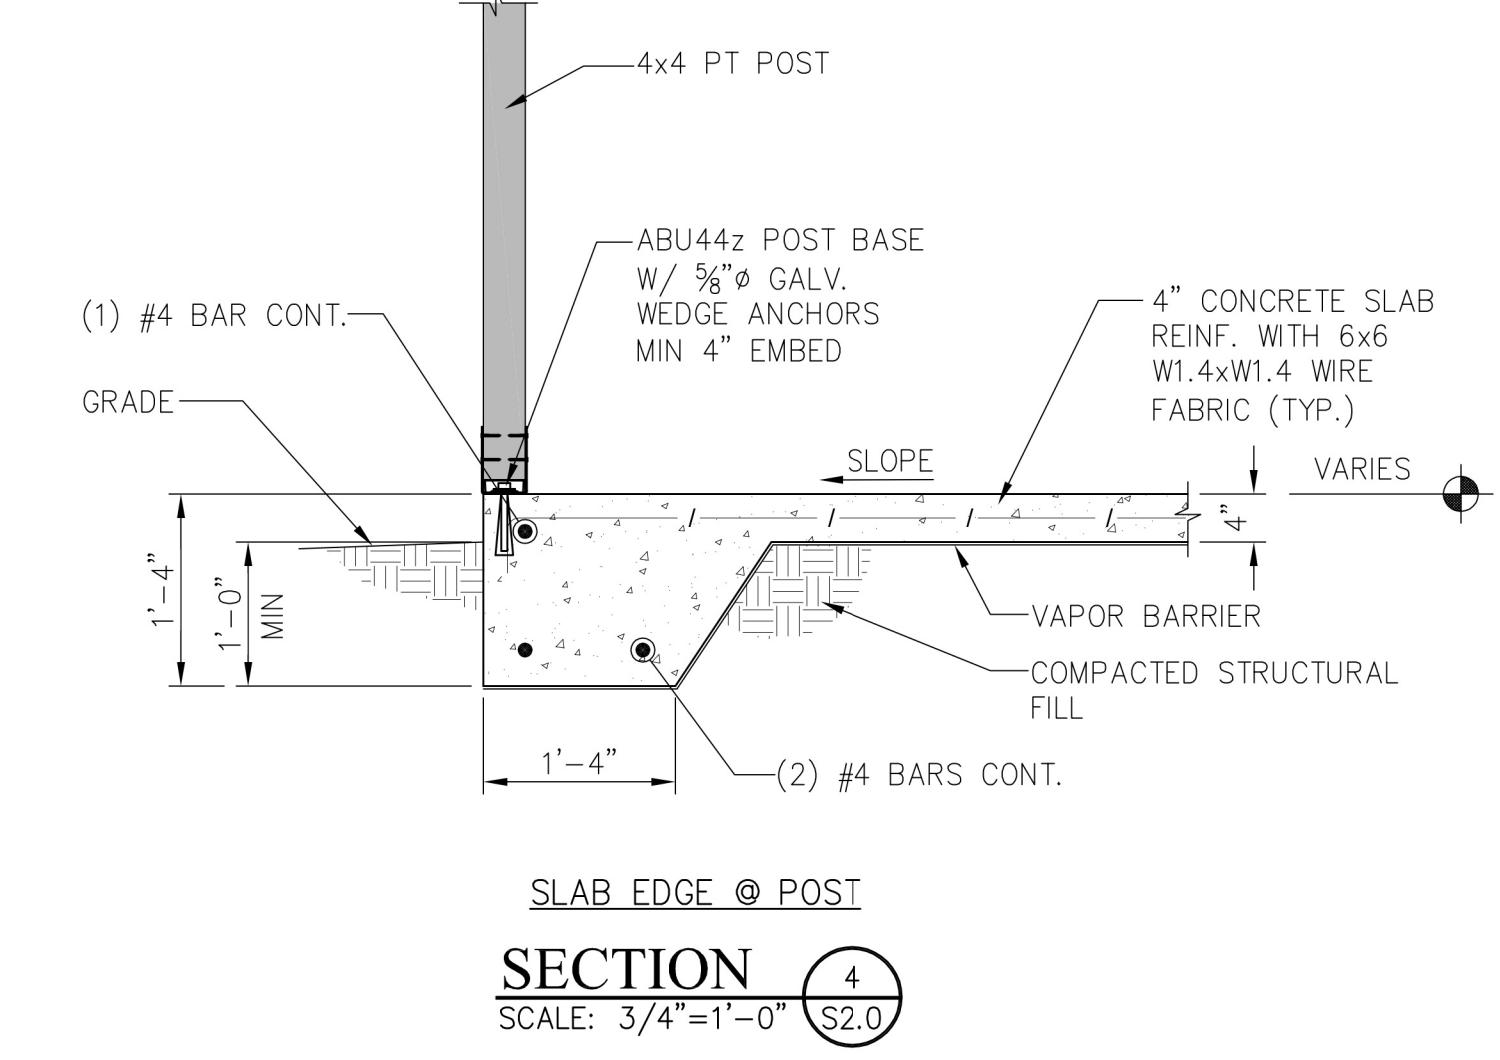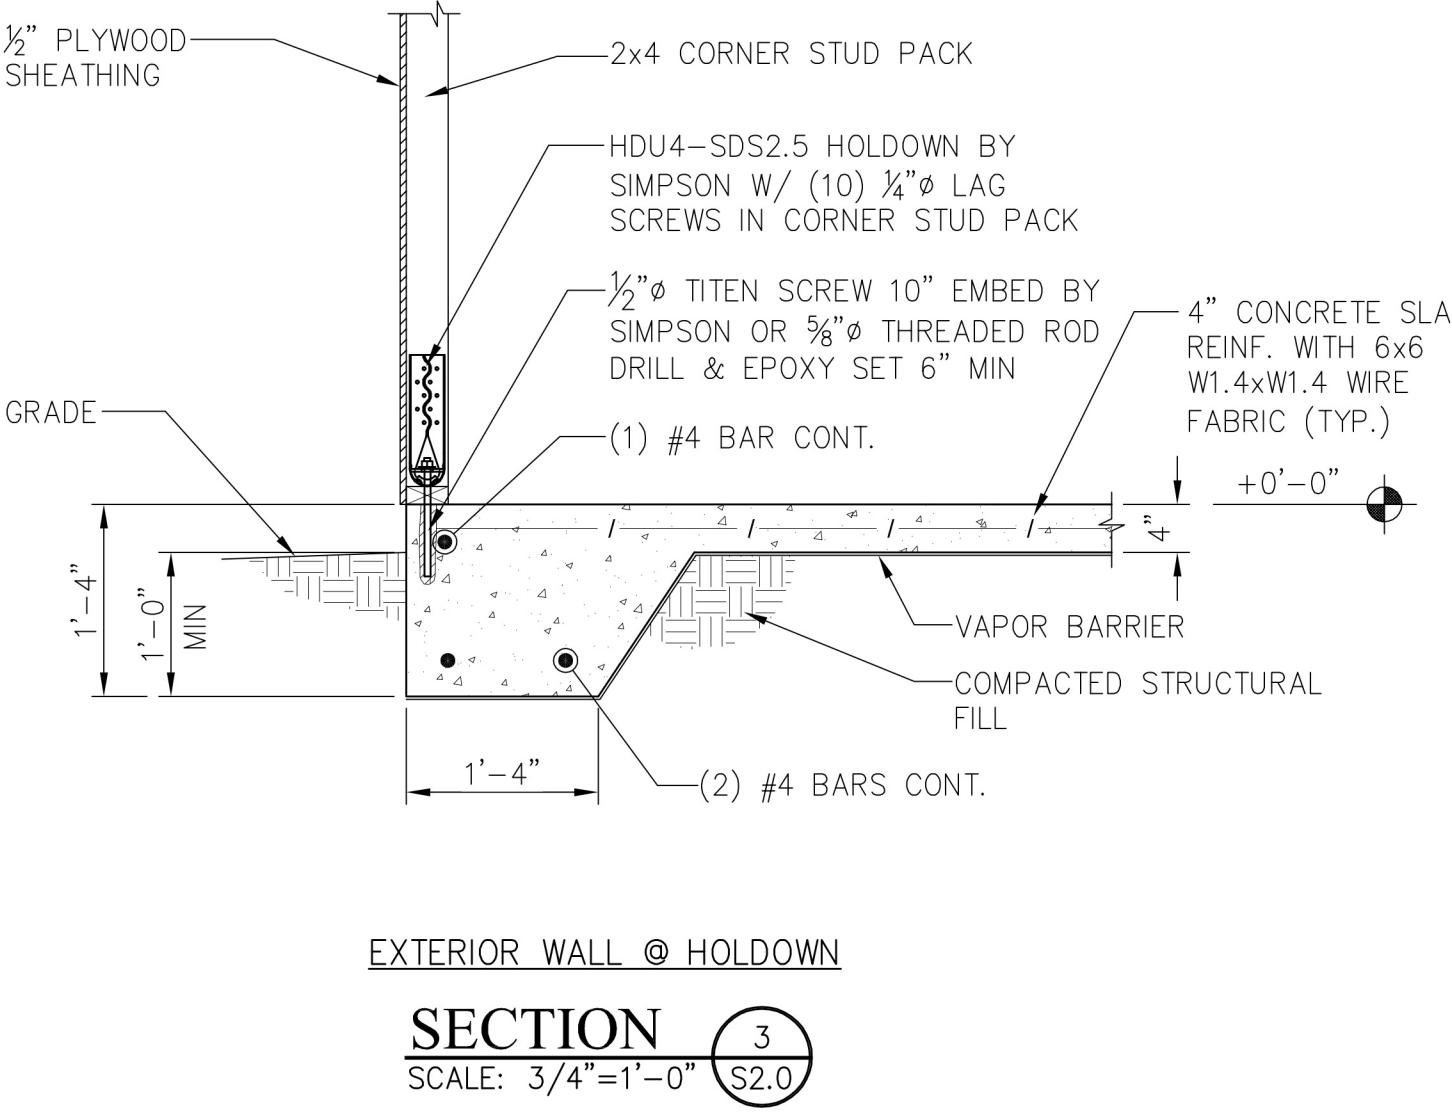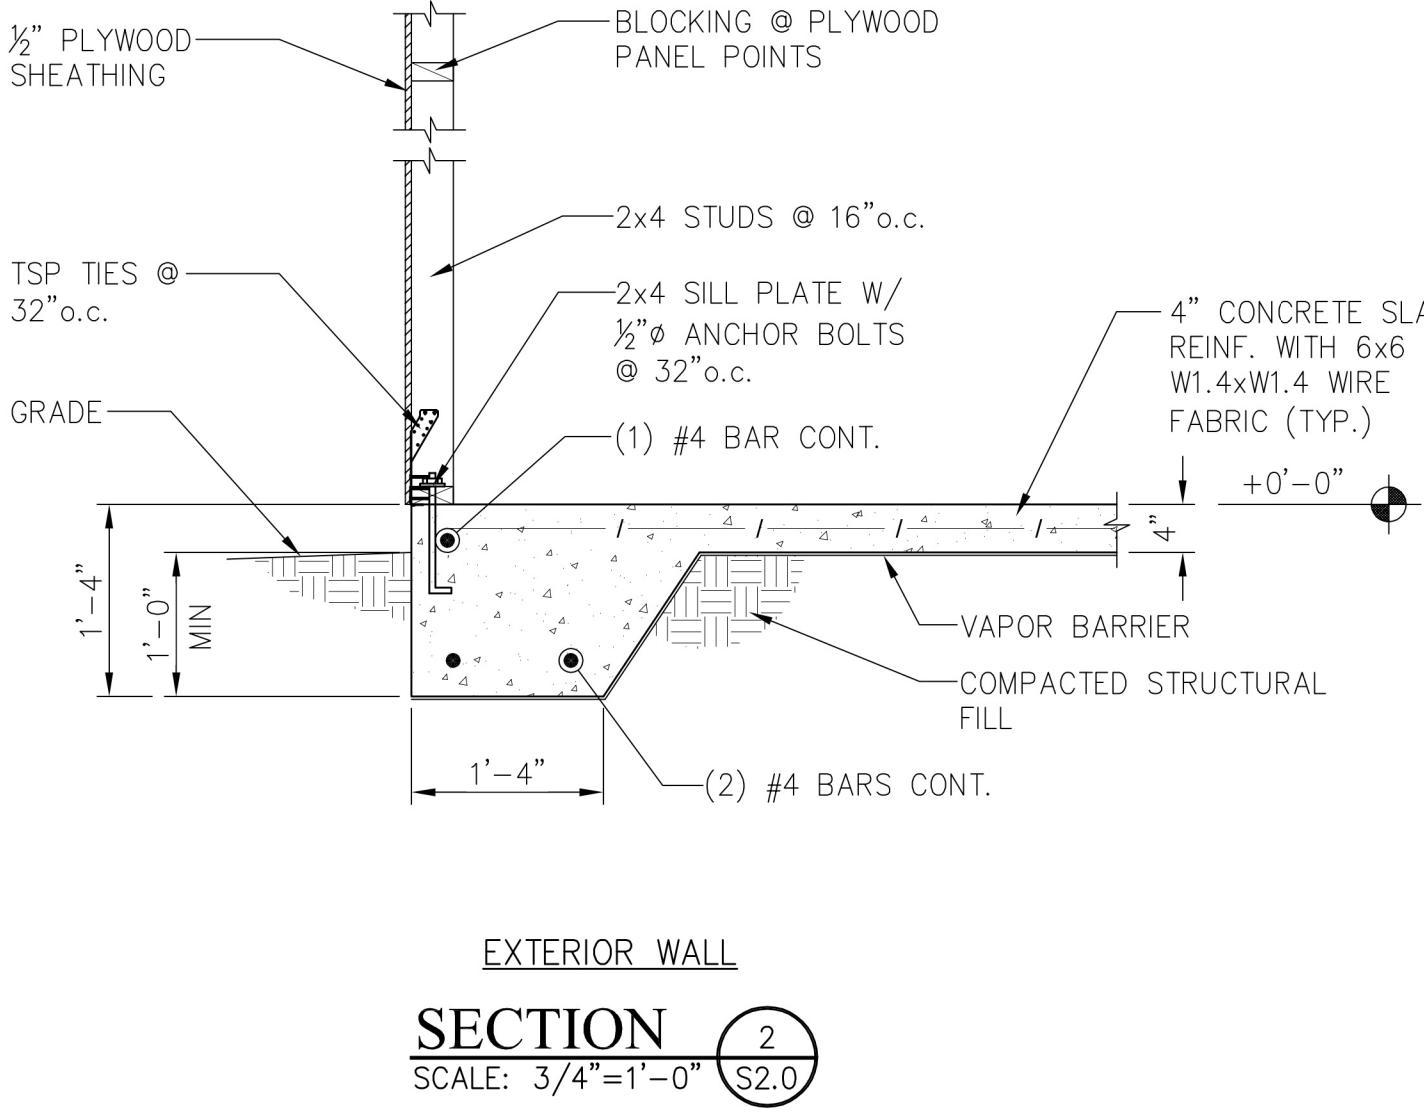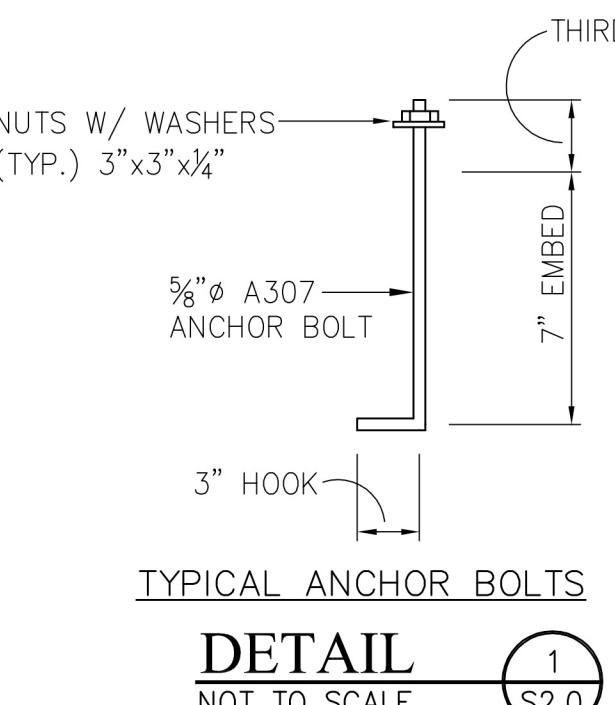



SECTIONS AND DETAILS
DOGWOOD RESIDENCE
(100 DEWITT AVENUE
SATSUMA, AL, 36572)

LOCATION:

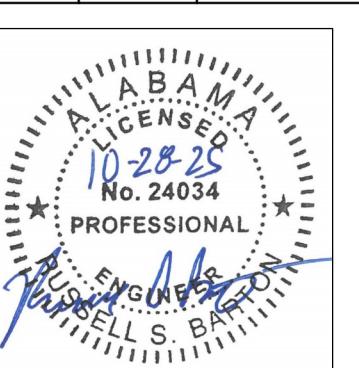

FOR PERMIT

REVISIONS:

DRAWN BY: MAD




DESIGNED BY: RSB

DATE: 28 OCT 2025


SHEET

S3.0

25342

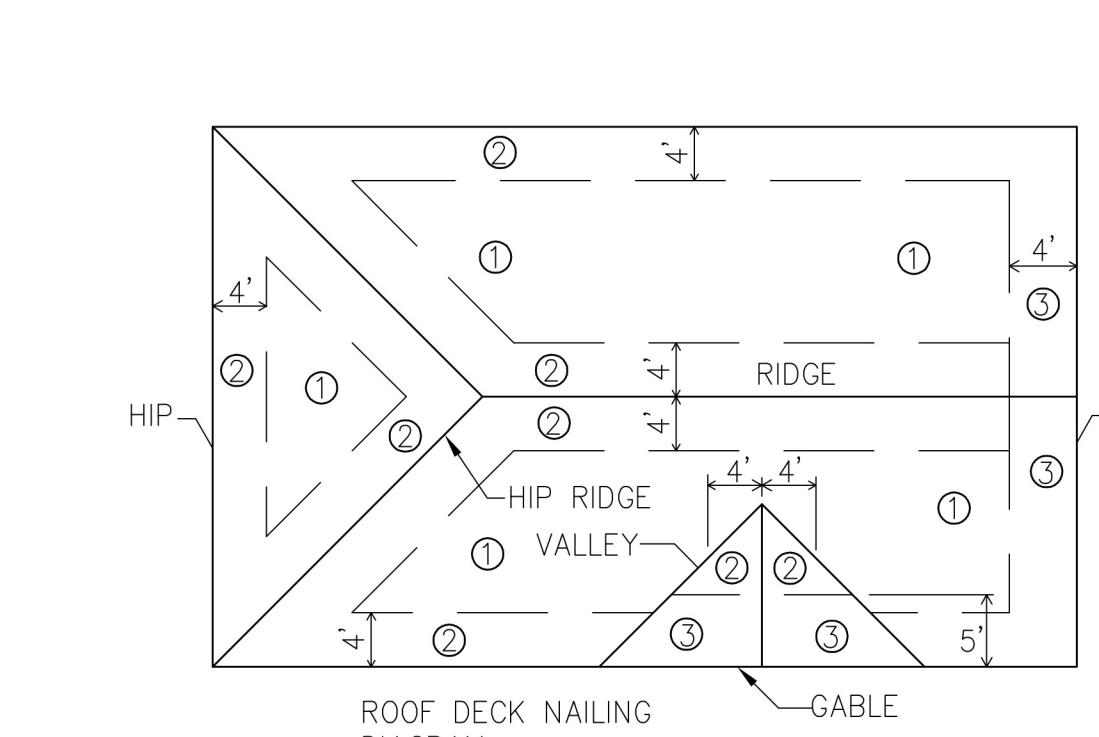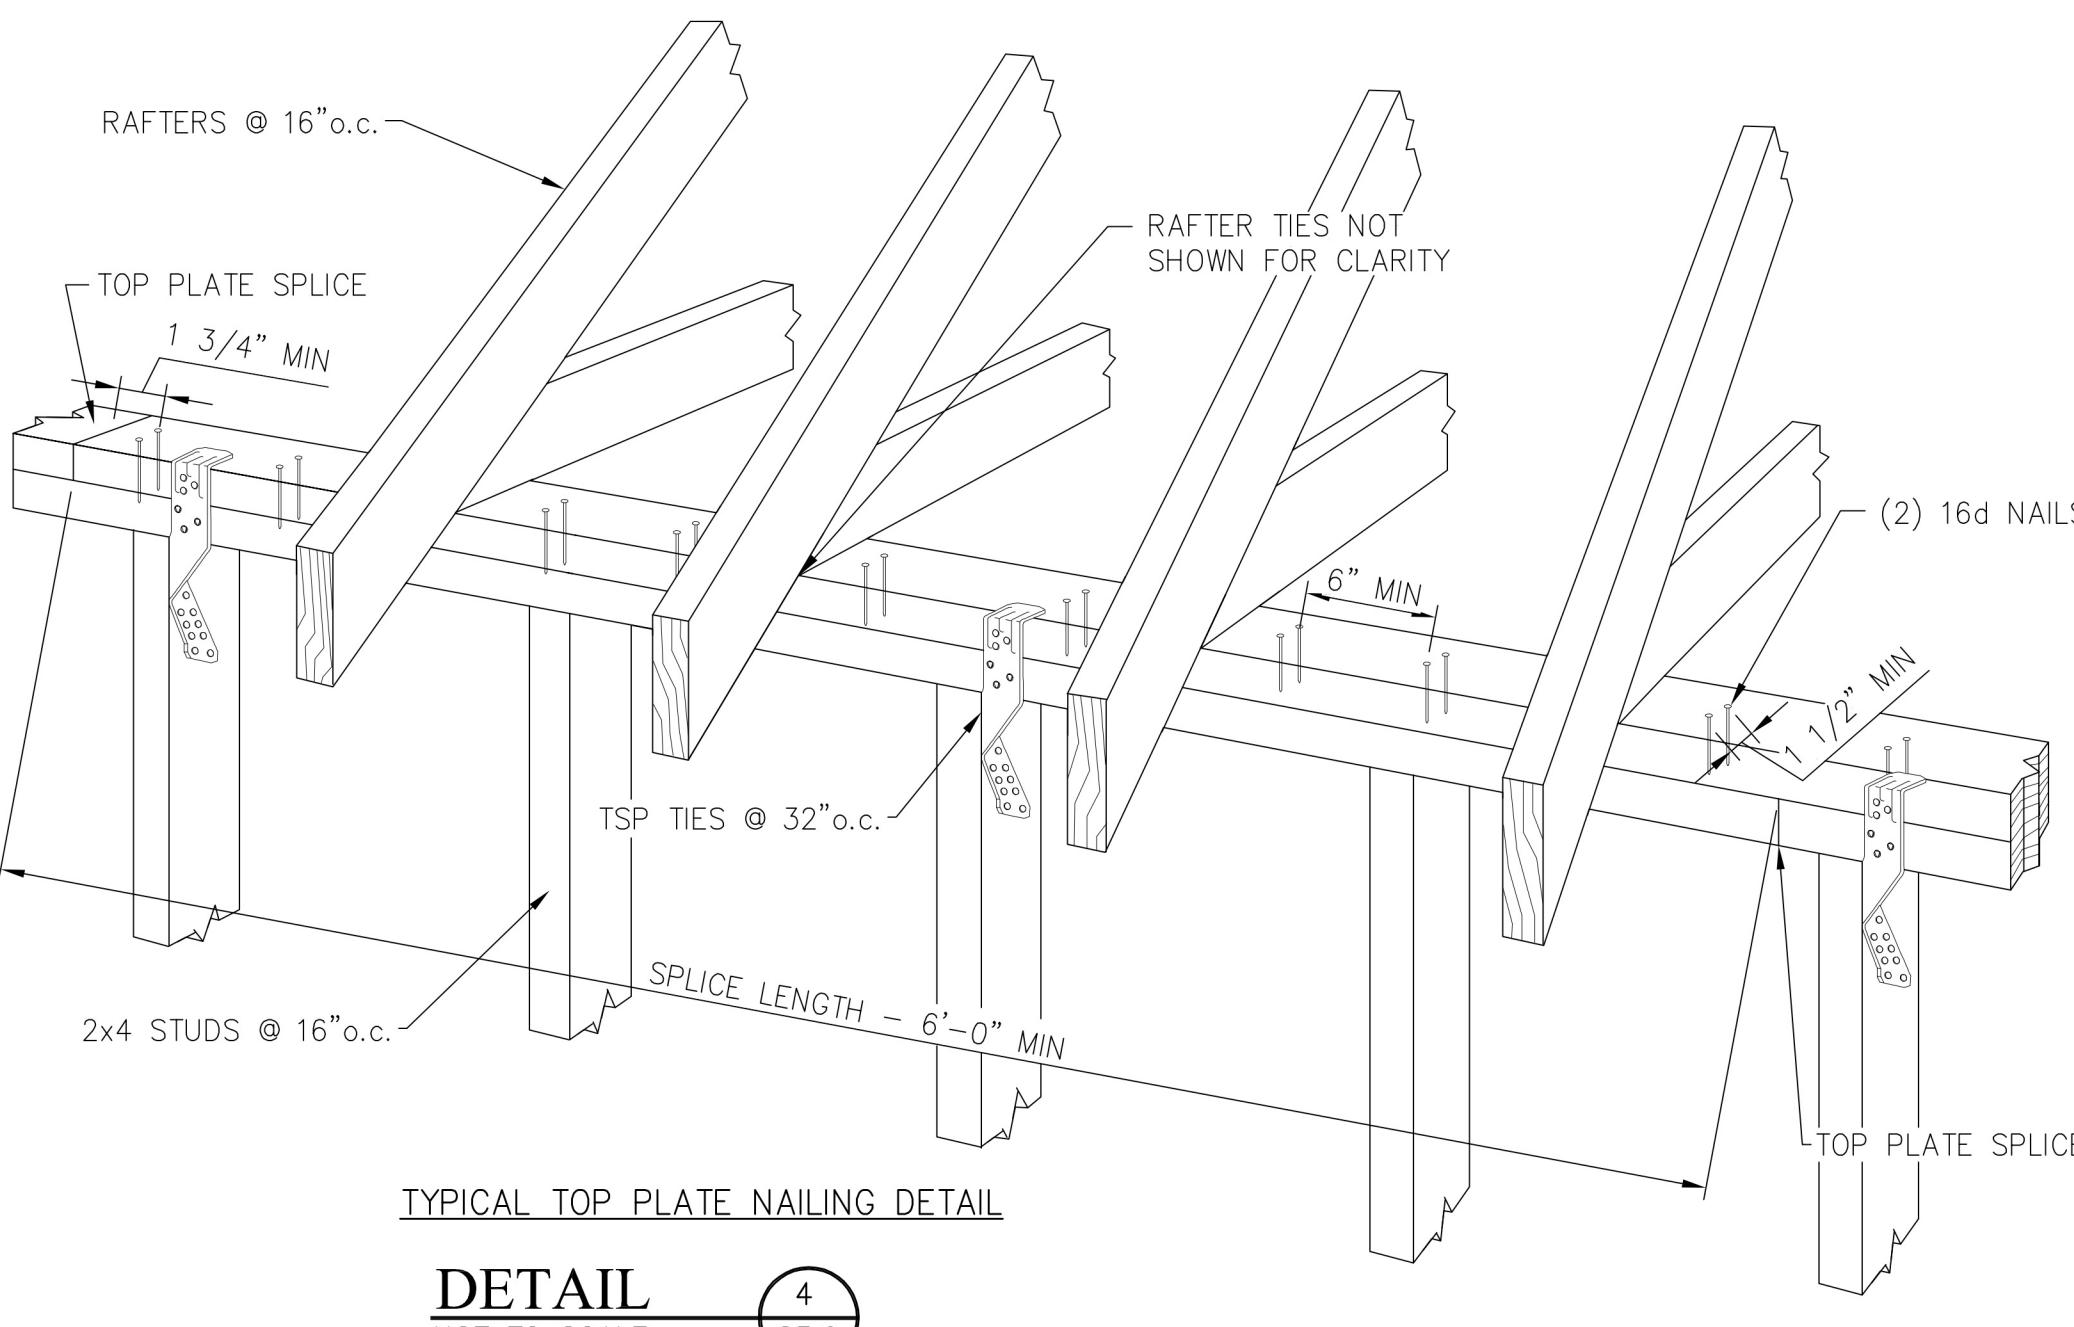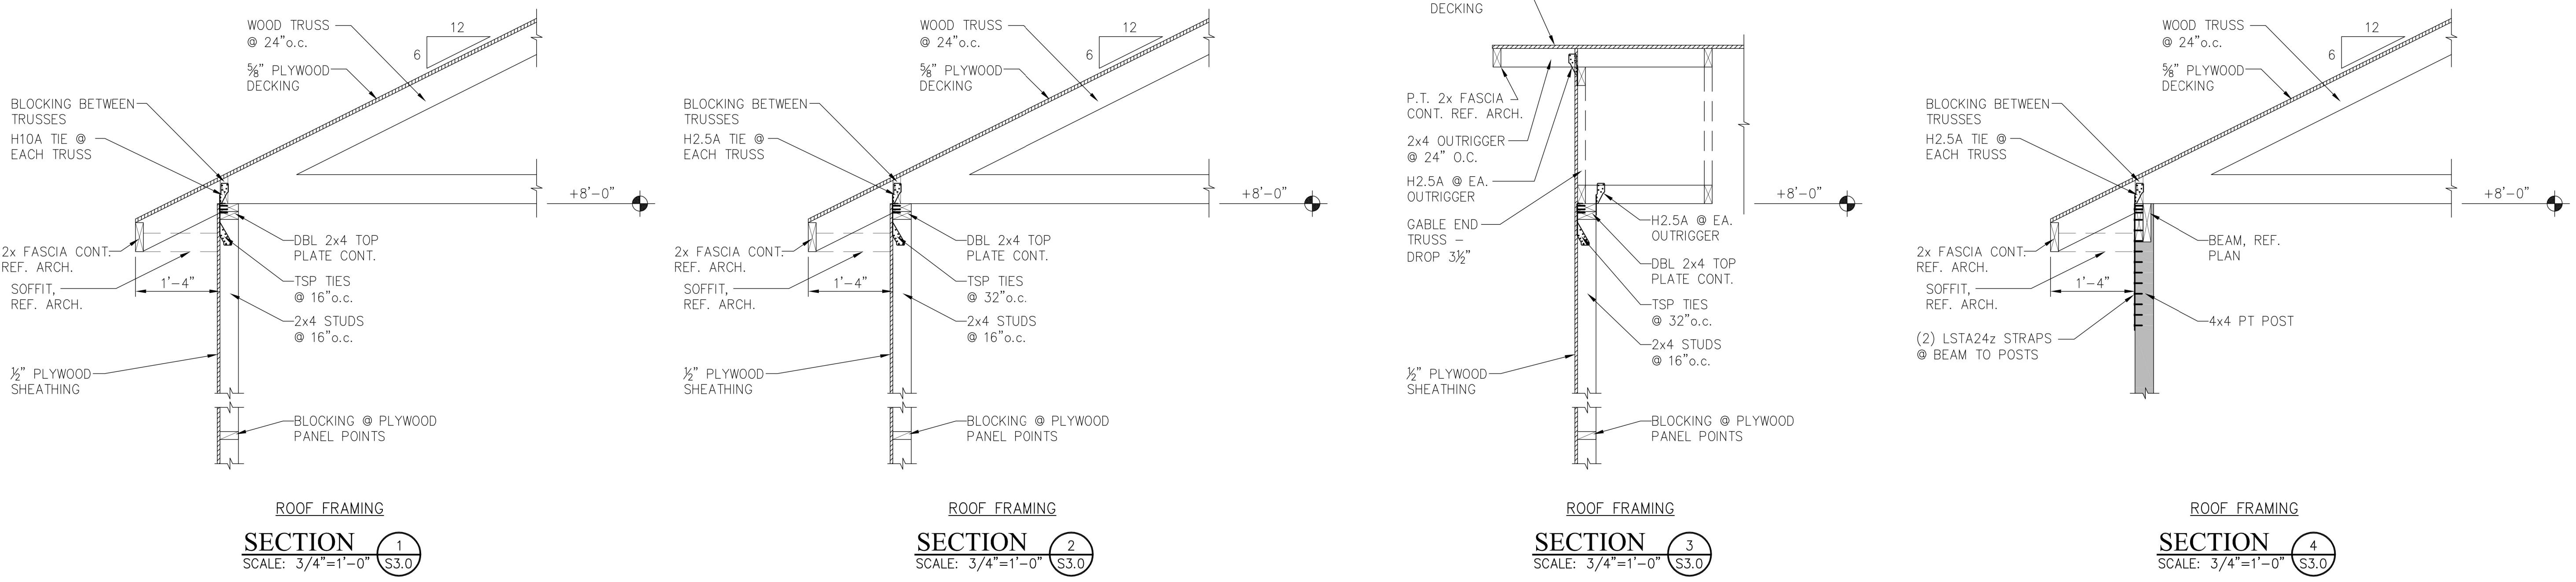

ROOF SHEATHING ATTACHMENT REQUIREMENTS			
THREE SECOND GUST, 112 MPH (ASD) 145 MPH (ULT) WIND SPEED		STRUCTURAL SHEATHING ATTACHMENT WITH 8d RING SHANK NAILS	
	Rafter/Truss Spacing (Inches o.c.)	EDGE NAILING	FIELD NAILING
① INTERIOR ZONE	16" o.c.	4" o.c.	4" o.c.
② PERIMETER/EDGE ZONE	16" o.c.	4" o.c.	4" o.c.
③ GABLE END/WALL RAKE OR RAKE TRUSS W/LOOKOUT BLOCK		4" o.c.	4" o.c.

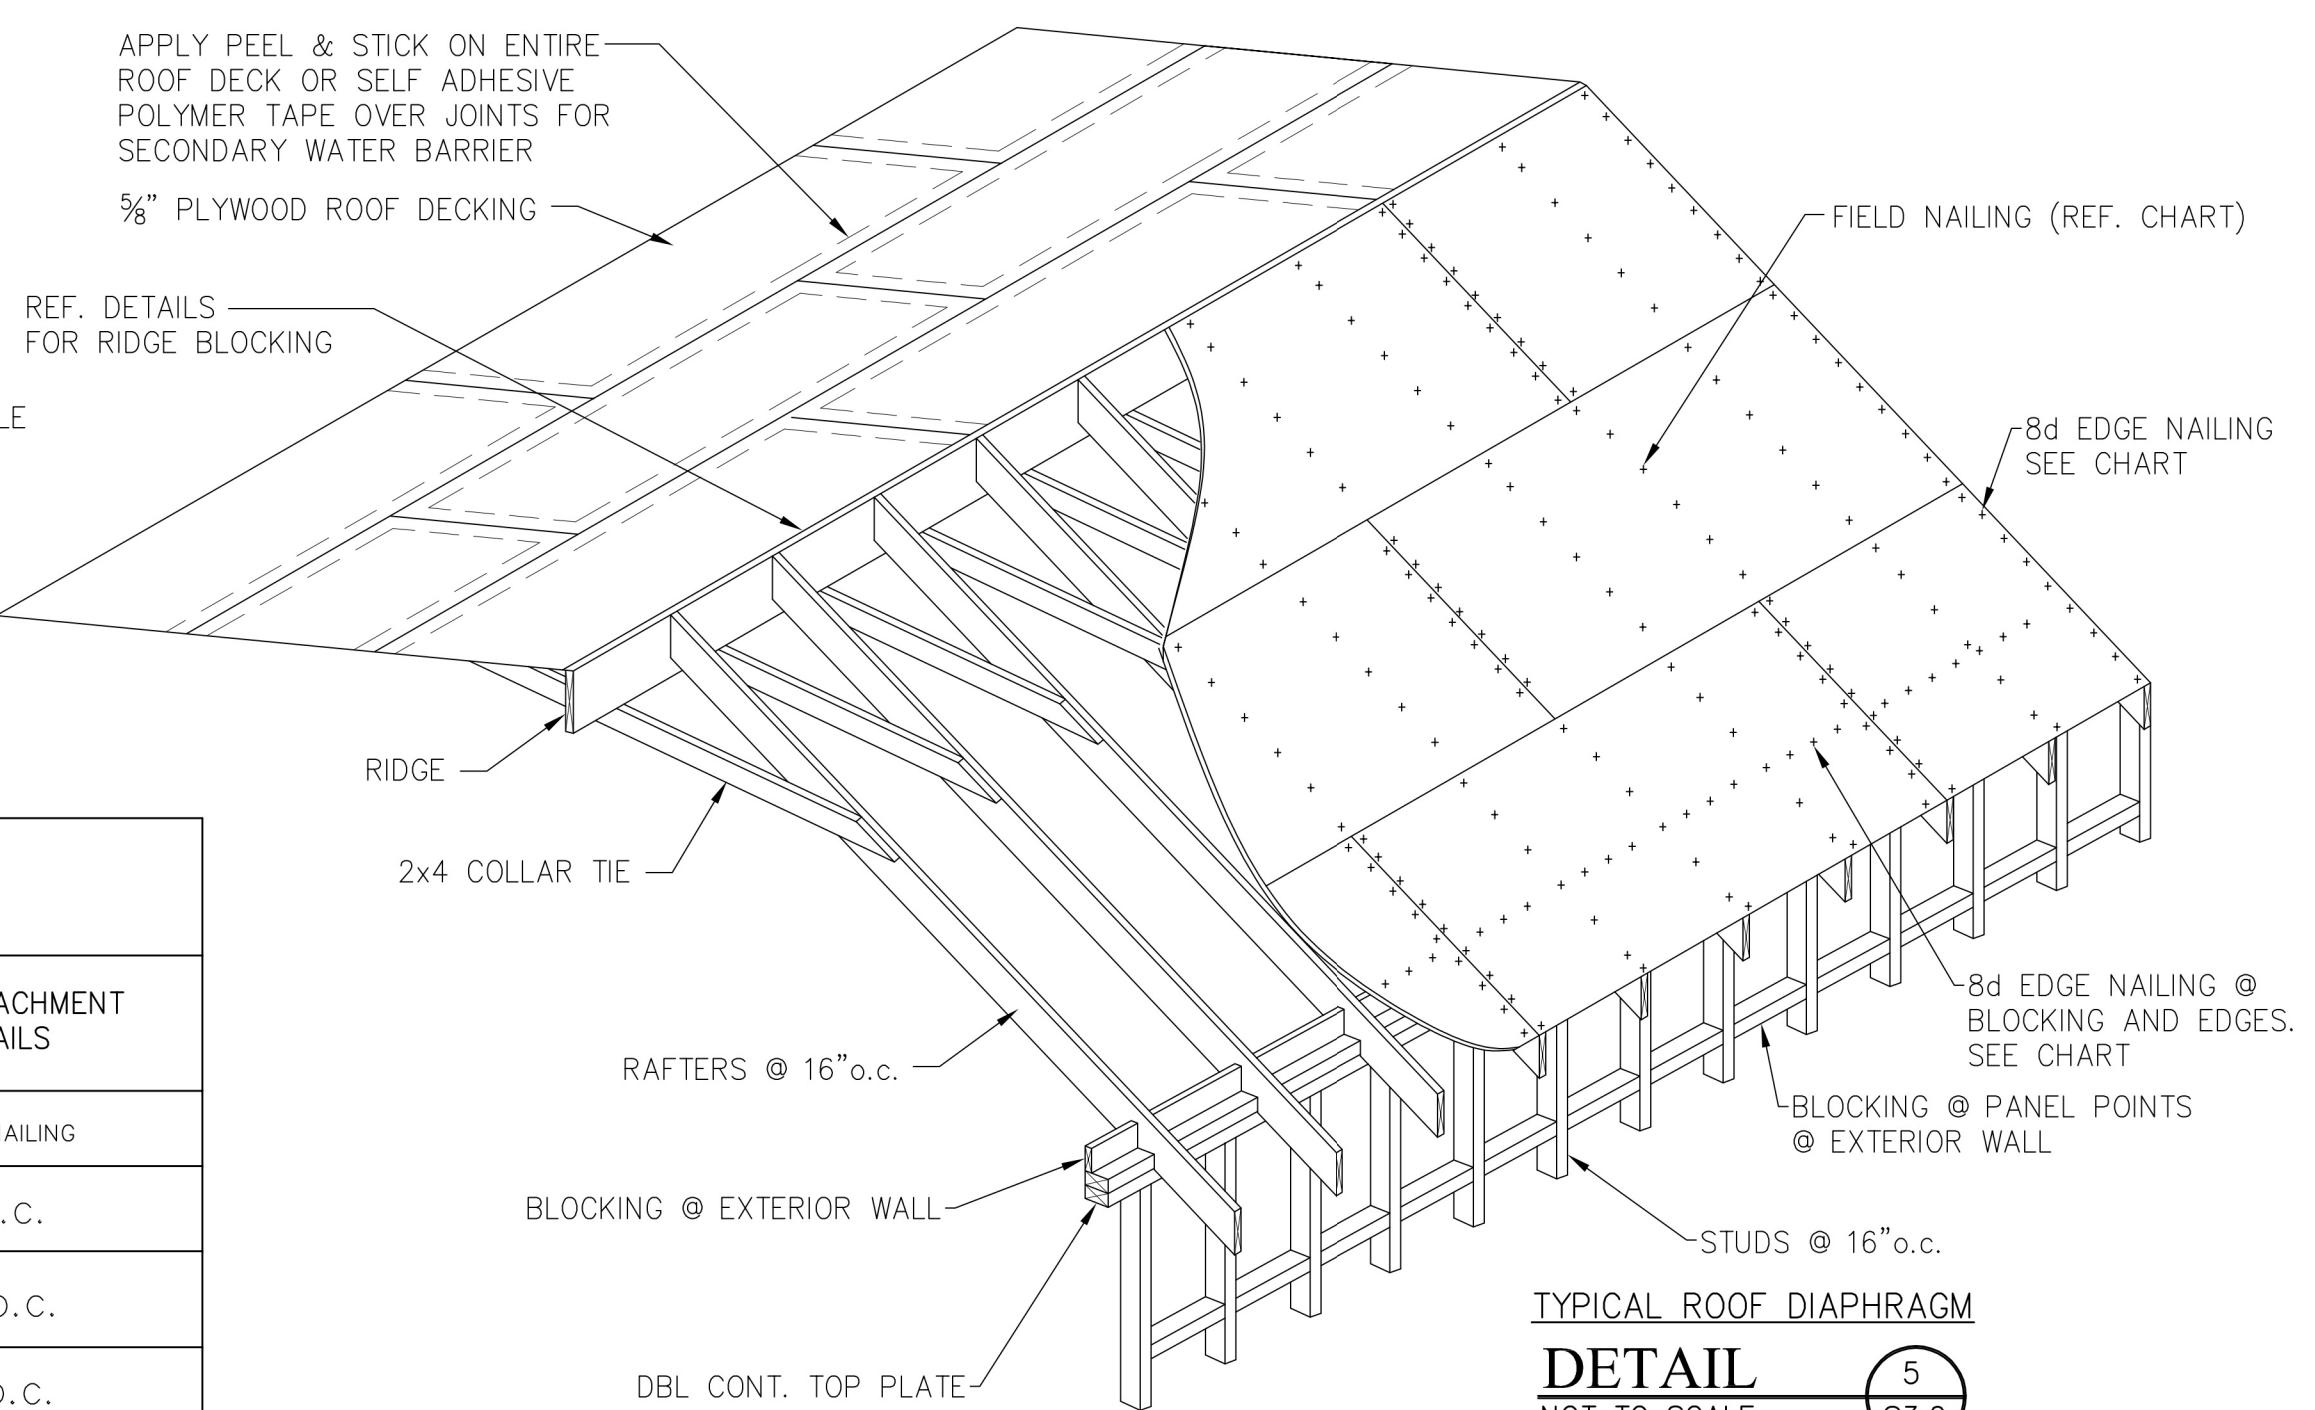

25342