


CROSS SECTION NEUTRAL GROUND
NOT TO SCALE

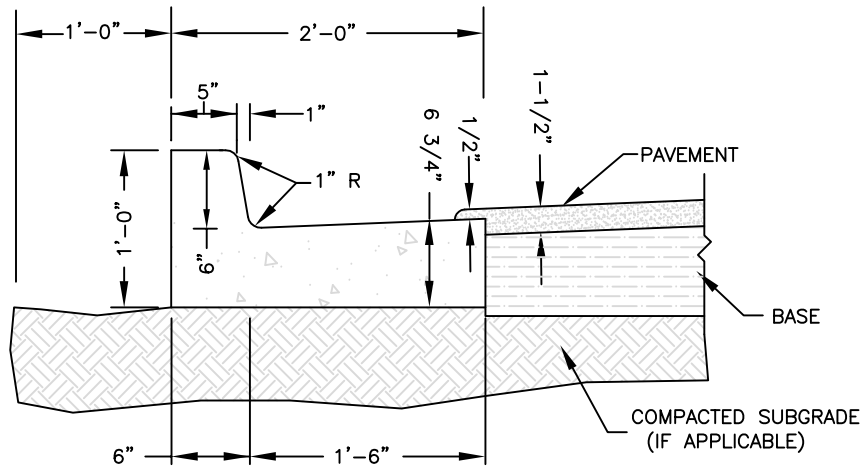


CURB & GUTTER DETAIL
NOT TO SCALE

NOTES:
SIDEWALK PANELS THAT ABUT THE DRIVEWAY TO BE 5" MINIMUM THICKNESS.

OTHER SIDEWALK PANELS TO BE 4" MIN. THICKNESS.

ALL CONCRETE TO BE 3000 P.S.I. MIX WITH NATURAL COLOR AND BROOM FINISH.

IF SITE CONDITIONS PROHIBIT THE USE OF THESE STANDARDS, AN ALTERNATIVE MAY BE SUBMITTED FOR APPROVAL TO THE ENGINEERING DEPT.



**CITY OF MOBILE, ALABAMA
ENGINEERING DEPARTMENT**

**NEUTRAL GROUND, C & G,
SIDEWALK DETAILS FOR
ASPHALT ROADWAY W/ C & G**